Bus summing amps (virtual earth, inputs from J3)




FX send / return (U3A) and monitor (U3B)



Master fader and +10 dB gain (U4)




Balanced main outputs (DRV134, sense pins tied at the IC)



Headphones: source switch, dual pot, NJM4556A x2 (U7)



Level meters: peak detectors (U8) and LM3915 bars (U9, U10) on the 5 V / GND_M return

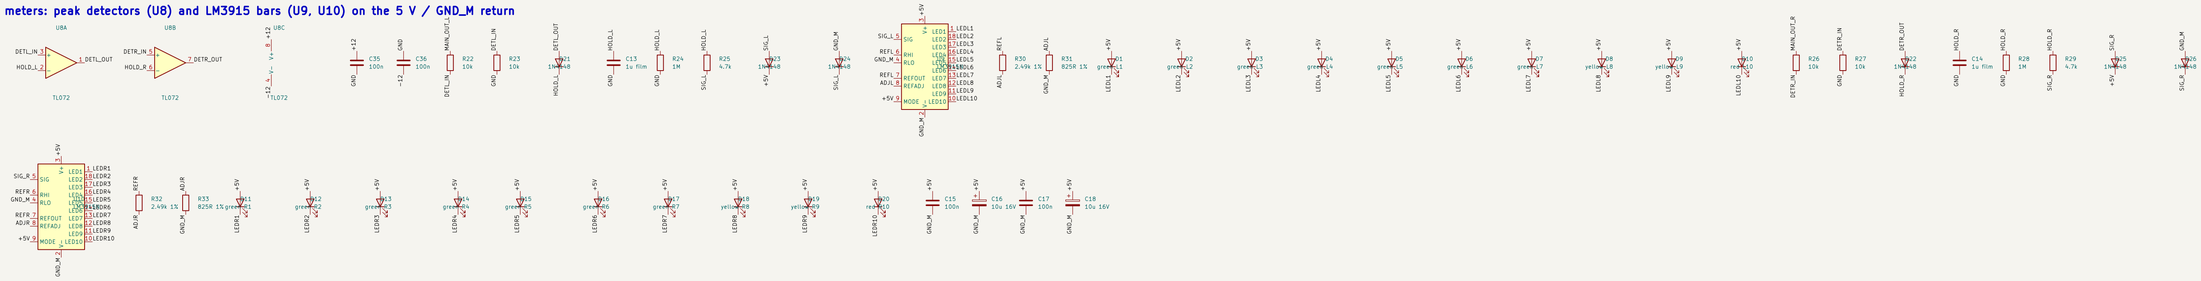

Digital-board header J4 (USB record feed, 5 V in) and power J2



Phase 3 master section v1. Spec: Stuff/mixer/phase3_master/README.md. LM3915 shown with the pin-identical LM3914N symbol. Meter: detector x0.5, LM3915 full scale 1.73 V = +16 dBu at the XLR (top LED). 5th LED from the top = +4 dBu. GND_M (5 V / meter return) joins GND only at NT1 by J2.

Sheet: /	
File: mixer_master.kicad_sch	
Title: Mixer Phase 3 — master section	
Size: A1 Date: 2026-10-26	Rev: 1
KiCad E.D.A. 10.0.7	Id: 1/1