


J1 to the master J5 (same pin order), 3.3 V for the module

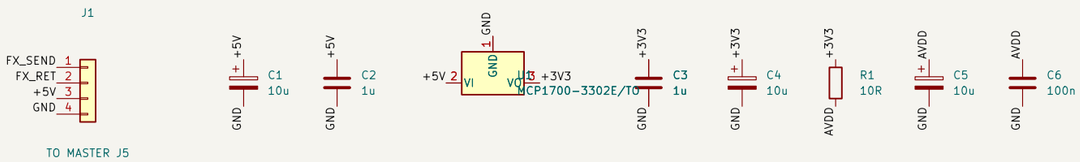


FV-1 module (Akizuki AE-FV-1-DIP): ROM/EEPROM jumper, program switch, optional EEPROM, POT trims

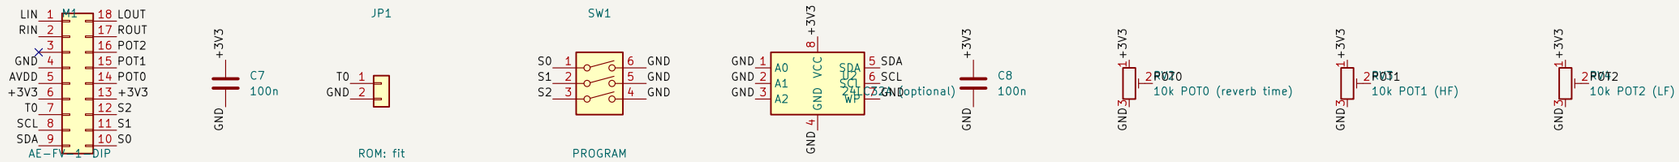

Input: 10k + IN LEVEL trim (max −6 dB), into both FV-1 inputs (1k + 1nF C0G at the pins)

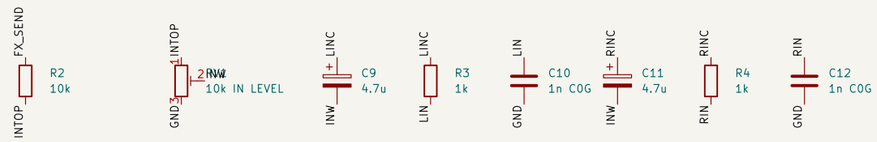

Output: L+R averaged, x1 to x3 (OUT LEVEL trim), MCP6002 on +5 V, AC coupled to FX_RET

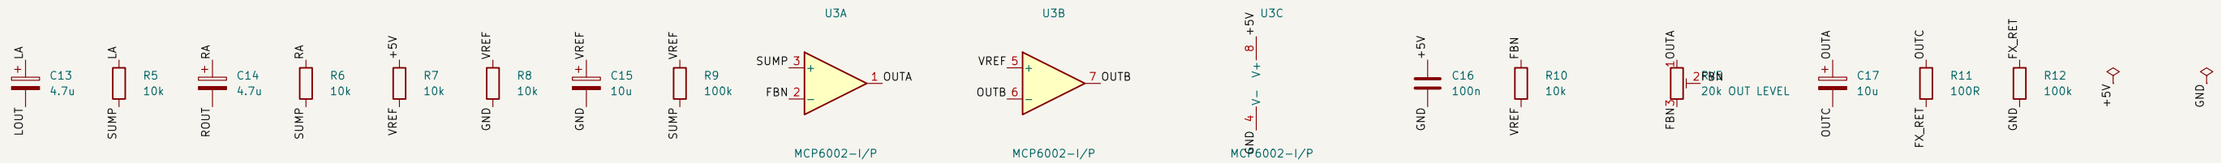

Phase 5 reverb carrier v1. Spec: Stuff/mixer/phase5_reverb/README.md. Mono send in (both FV-1 inputs), L+R averaged back out, same polarity as the send. Module: Akizuki AE-FV-1-DIP.

Sheet: /		
File: mixer_reverb.kicad_sch		
Title: Mixer Phase 5 — FV-1 reverb carrier		
Size: A3	Date: 2026-10-26	**Rev: 1**
KiCad E.D.A. 10.0.7		Id: 1/1