




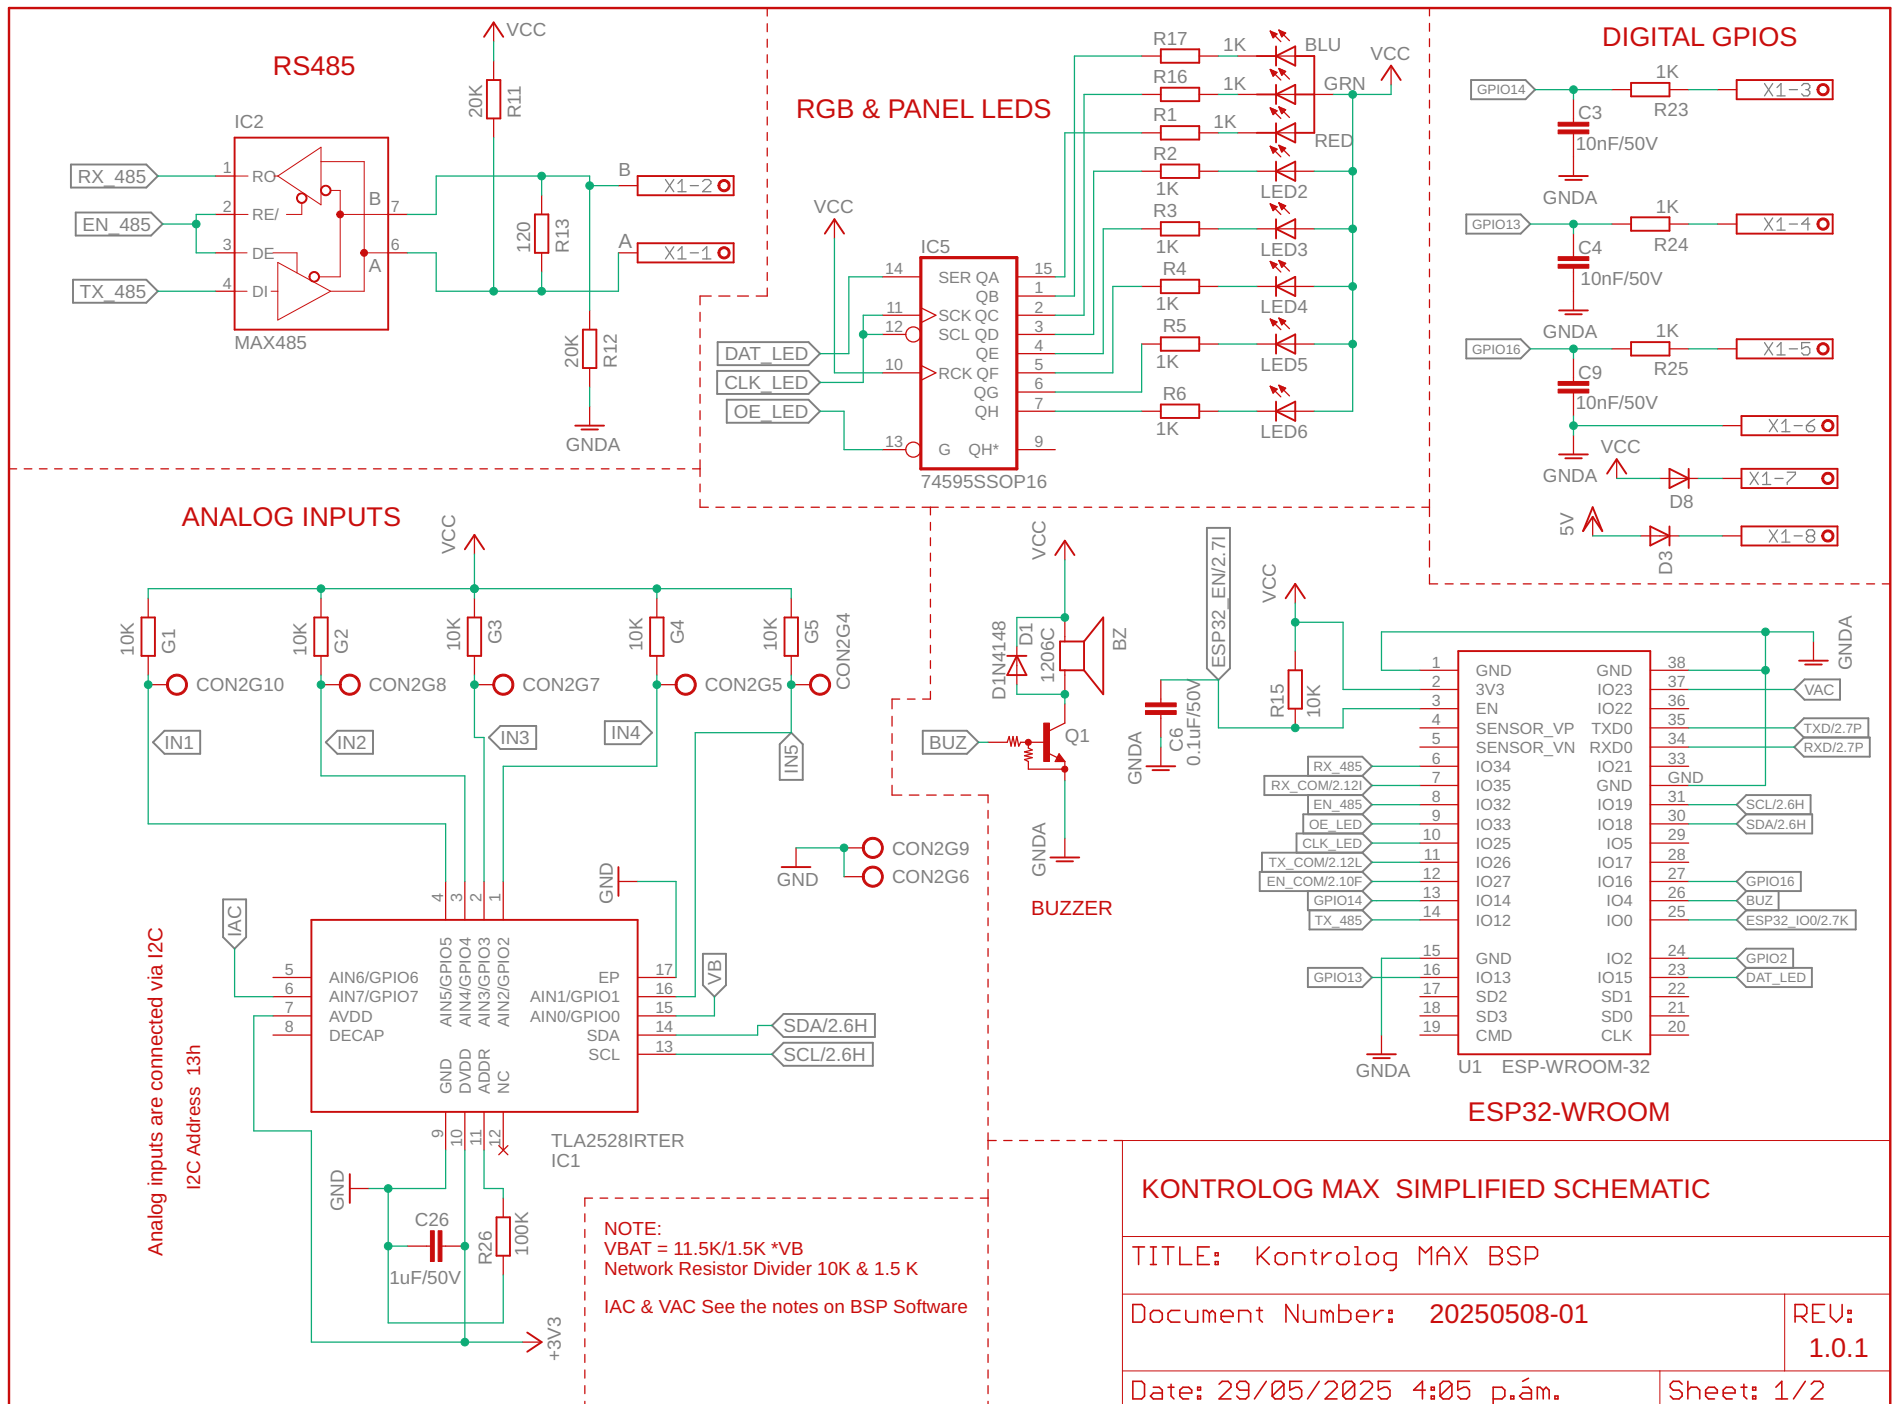


RELAY OUTPUTS

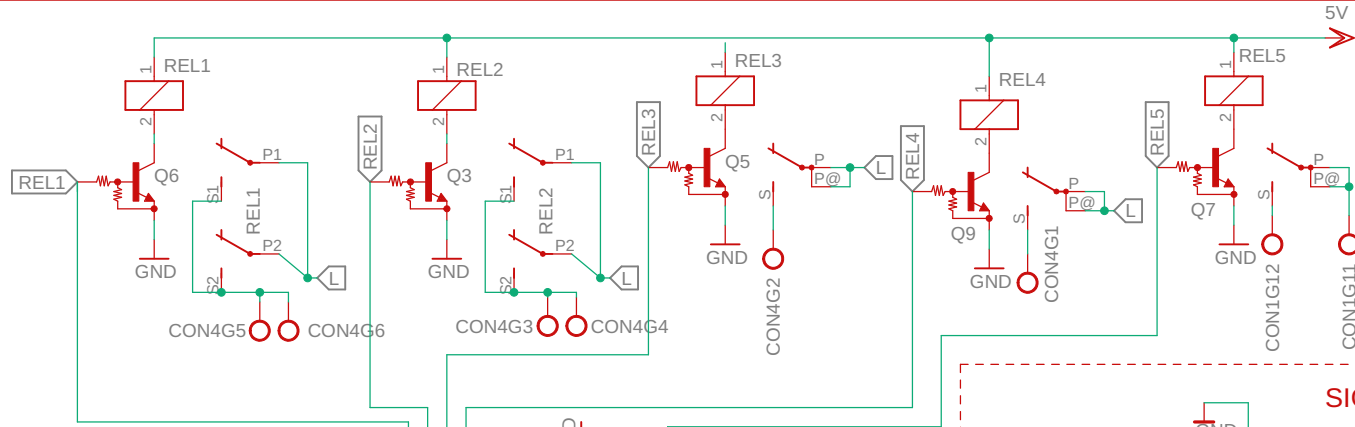


Relay outputs are connected via I2C
I2C Address 12h

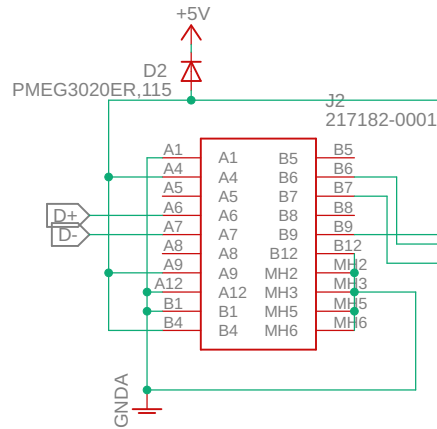

USB TYPE C CONNECTOR

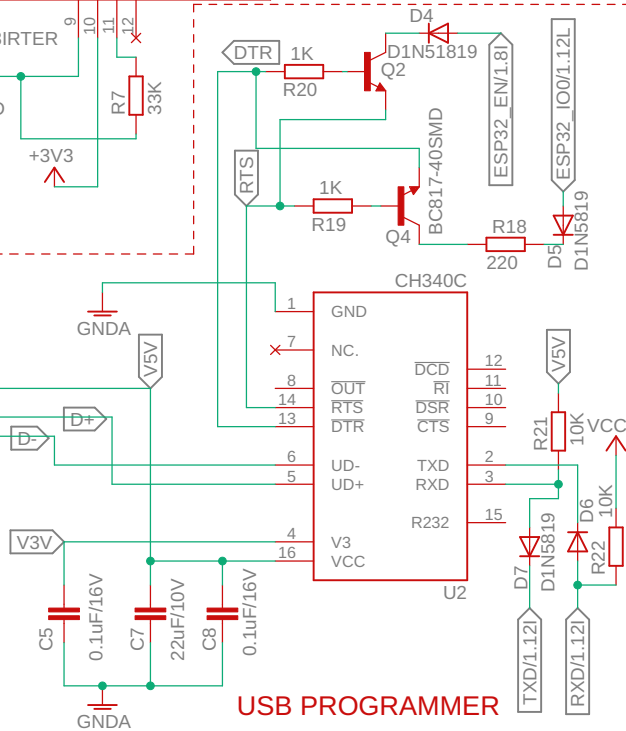

USB PROGRAMMER

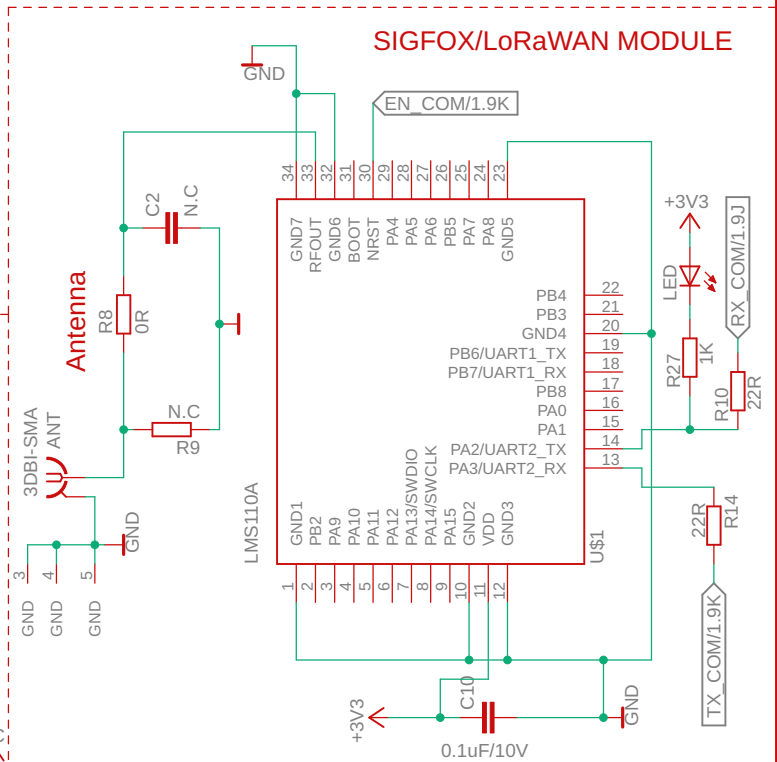

SIGFOX/LoRaWAN MODULE

KONTRIOLOG MAX SIMPLIFIED SCHEMATIC

TITLE: Kontrolog MAX BSP

Document Number: 20250508-01

REV:
1.0.1

Date: 29/05/2025 4:05 p. m.

Sheet: 2/2