



SHETH LUJ AND SIR MV COLLEGE
Cyber & Information Security

Practical No 6

Aim: Configure IPsec on network devices to provide secure communication and protect against unauthorized access and attacks.

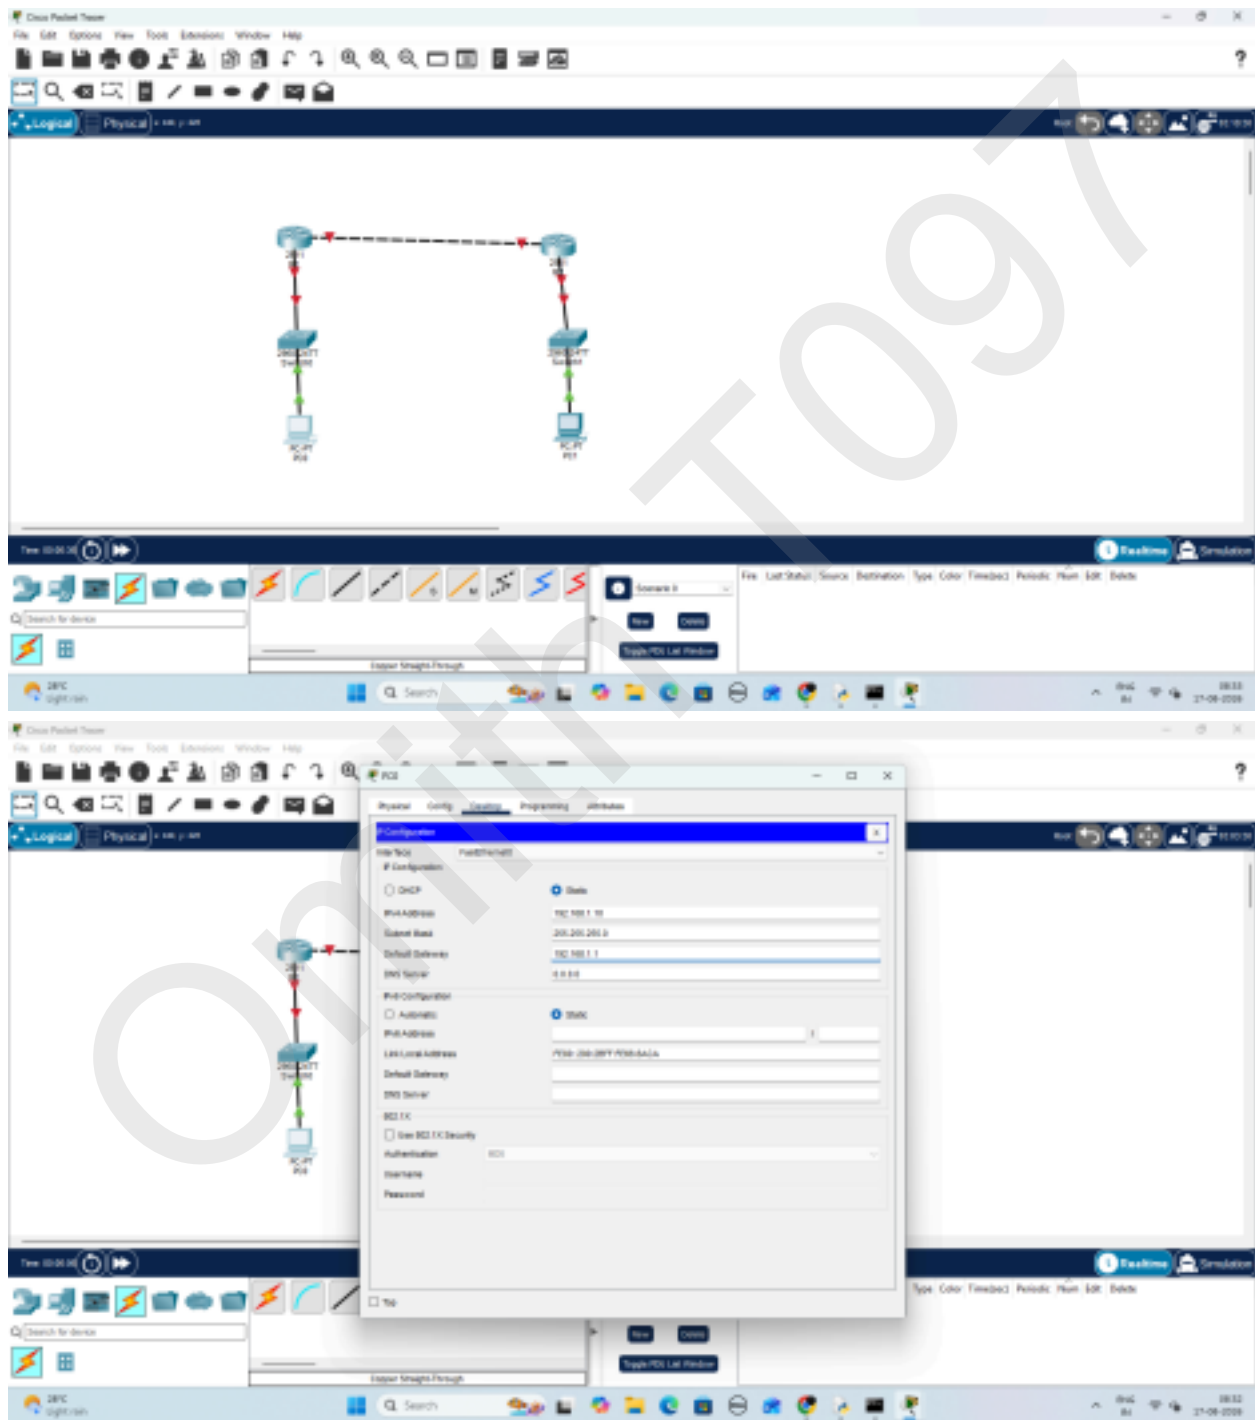

SHETH LUJ AND SIR MV COLLEGE
Cyber & Information Security

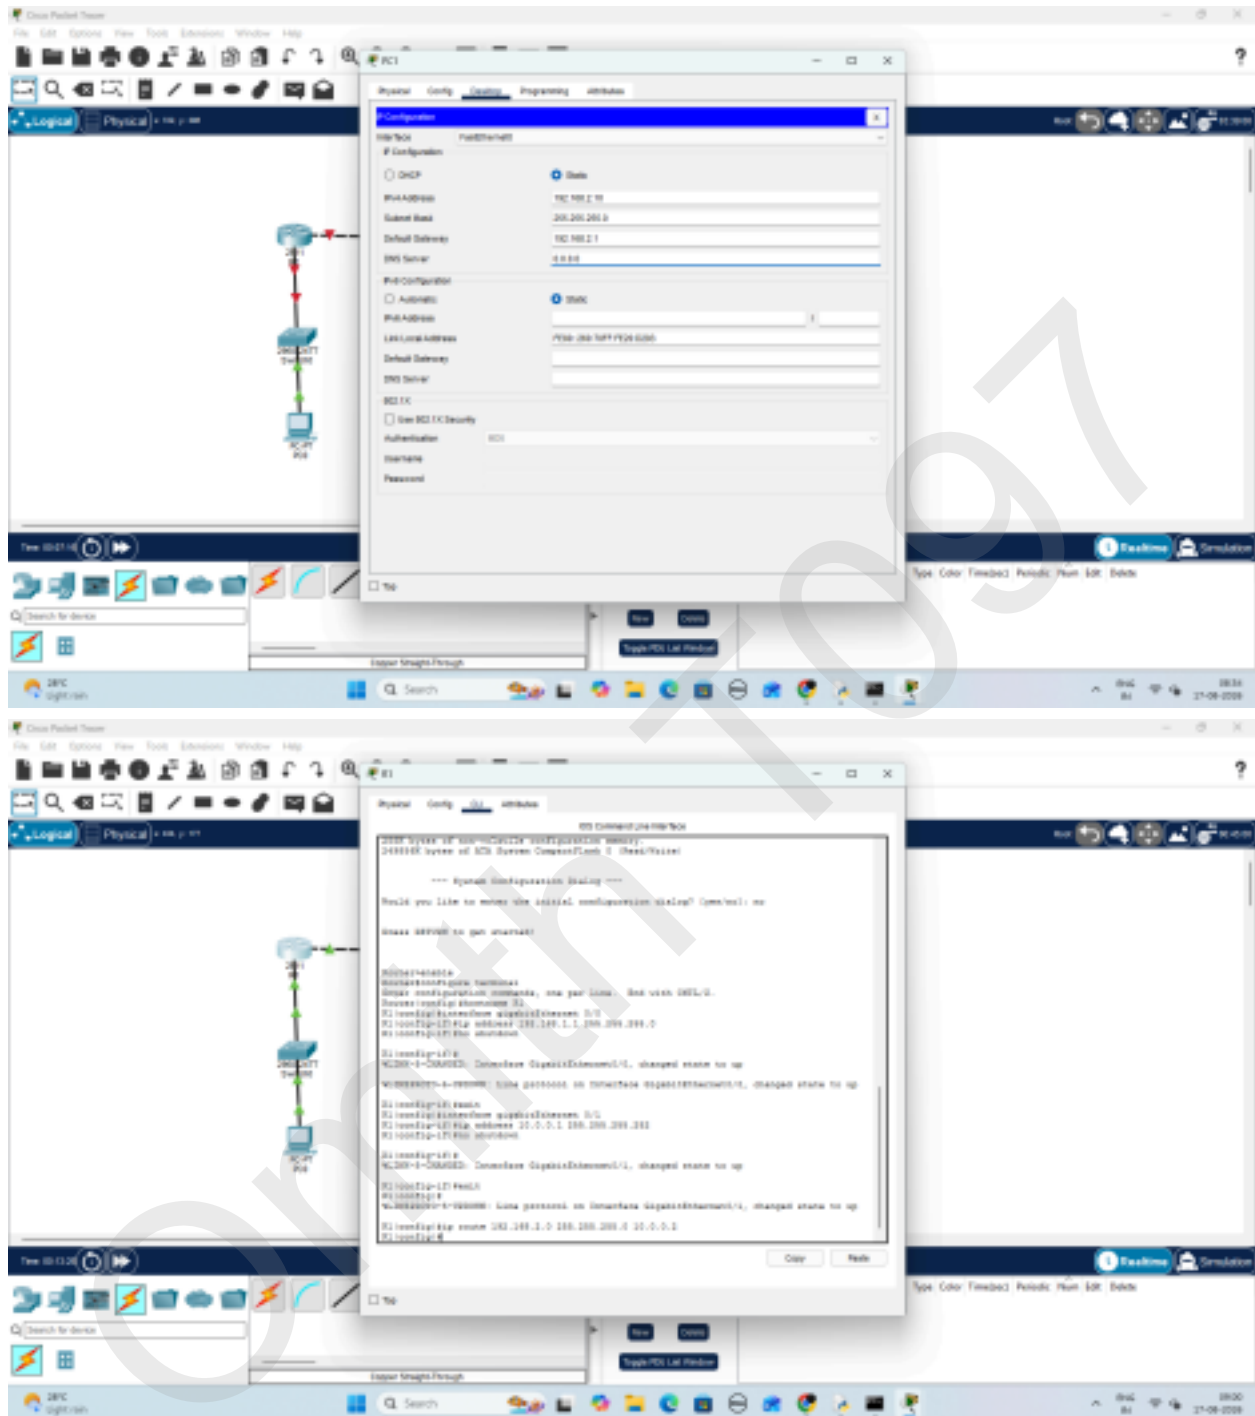

The top screenshot shows a Packet Tracer workspace with a single switch (CS070001) connected to a PC (PC01). The switch configuration window is open, displaying the following commands:

```

Switch> enable
Switch# configure terminal
Switch(config)# hostname CS070001
Switch(config)# interface GigabitEthernet 0/24
Switch(config-if)# ip address 10.10.10.1 255.255.255.0
Switch(config-if)# no shutdown
Switch(config-if)# exit
Switch(config)# end

```

The bottom screenshot shows a Packet Tracer workspace with two switches (CS070101 and CS070102) connected to each other and to two PCs (PC01 and PC02). The configuration window for CS070101 is open, displaying the following commands:

```

Switch> enable
Switch# configure terminal
Switch(config)# hostname CS070101
Switch(config)# interface GigabitEthernet 0/24
Switch(config-if)# ip address 10.10.10.1 255.255.255.0
Switch(config-if)# no shutdown
Switch(config-if)# exit
Switch(config)# interface GigabitEthernet 0/25
Switch(config-if)# ip address 10.10.10.2 255.255.255.0
Switch(config-if)# no shutdown
Switch(config-if)# exit
Switch(config)# interface GigabitEthernet 0/26
Switch(config-if)# ip address 10.10.10.3 255.255.255.0
Switch(config-if)# no shutdown
Switch(config-if)# exit
Switch(config)# interface GigabitEthernet 0/27
Switch(config-if)# ip address 10.10.10.4 255.255.255.0
Switch(config-if)# no shutdown
Switch(config-if)# exit
Switch(config)# interface GigabitEthernet 0/28
Switch(config-if)# ip address 10.10.10.5 255.255.255.0
Switch(config-if)# no shutdown
Switch(config-if)# exit
Switch(config)# interface GigabitEthernet 0/29
Switch(config-if)# ip address 10.10.10.6 255.255.255.0
Switch(config-if)# no shutdown
Switch(config-if)# exit
Switch(config)# interface GigabitEthernet 0/30
Switch(config-if)# ip address 10.10.10.7 255.255.255.0
Switch(config-if)# no shutdown
Switch(config-if)# exit
Switch(config)# interface GigabitEthernet 0/31
Switch(config-if)# ip address 10.10.10.8 255.255.255.0
Switch(config-if)# no shutdown
Switch(config-if)# exit
Switch(config)# end

```

The image displays two screenshots of the Cisco Packet Tracer software interface, showing a network topology and a terminal window with configuration commands.

Top Screenshot:

- Network Topology:** A Cisco 2800 router is connected to a Cisco 2800 switch, which is connected to a PC.
- Terminal Window:** The terminal shows the configuration of the Cisco 2800 router. The commands and output are as follows:


```

      Router>enable
      Router#configure terminal
      Router(config)#hostname R1
      R1(config)#interface GigabitEthernet 0/0
      R1(config-if)#ip address 192.168.1.1 255.255.255.0
      R1(config-if)#no shutdown
      R1(config-if)#exit
      R1(config)#interface GigabitEthernet 0/1
      R1(config-if)#ip address 192.168.2.1 255.255.255.0
      R1(config-if)#no shutdown
      R1(config-if)#exit
      R1(config)#end
      Router#show ipconfig
      
```

Bottom Screenshot:

- Network Topology:** The same network topology as the top screenshot.
- Terminal Window:** The terminal shows the configuration of the Cisco 2800 router. The commands and output are as follows:


```

      Router>enable
      Router#configure terminal
      Router(config)#hostname R1
      R1(config)#interface GigabitEthernet 0/0
      R1(config-if)#ip address 192.168.1.1 255.255.255.0
      R1(config-if)#no shutdown
      R1(config-if)#exit
      R1(config)#interface GigabitEthernet 0/1
      R1(config-if)#ip address 192.168.2.1 255.255.255.0
      R1(config-if)#no shutdown
      R1(config-if)#exit
      R1(config)#end
      Router#show ipconfig
      
```

[illegible]