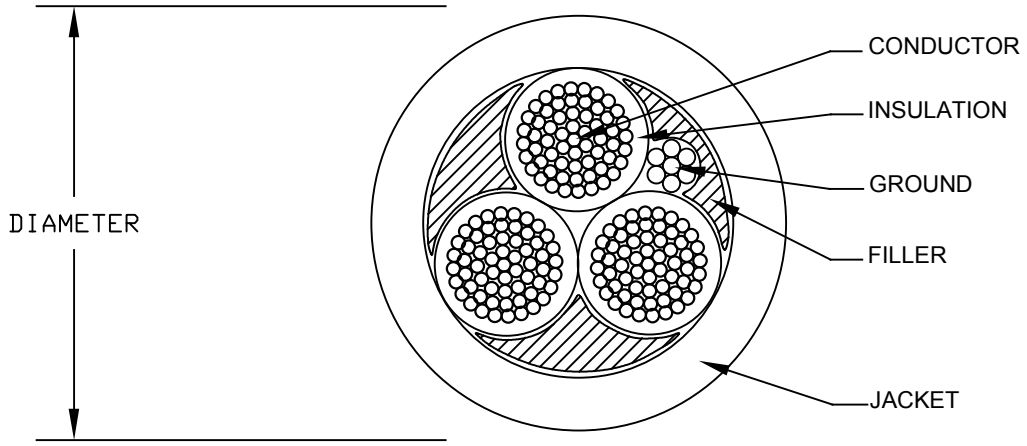


CONDUCTOR:	600 kcmil (61/w) Bare Copper Class B Strand per ASTM B3, B8
INSULATION:	0.070" / 0.009" Min. Avg. Wall, Flame-Retardant Polyvinyl Chloride (PVC) with Nylon
GROUND WIRE:	#2AWG (7/w) Bare Copper Class B Strand per ASTM B3, B8
FILLER:	Polypropylene, As Required
CABLE:	Three (3) Insulated Conductors & One (1) Ground Wire & Fillers Cabled Together With a Left Hand Lay
JACKET:	0.110" Min. Avg. Wall, Flame-Retardant Polyvinyl Chloride (PVC), Black
PRINT LEGEND:	GENERAL CABLE® (MI) VNTC 3/C 600 KCMIL WITH GRND (UL) TYPE TC-ER THHN/THWN CDRS SUN RES DIR BUR ROHS 600V MONTH/YEAR PLUS SEQUENTIAL FOOTAGE MARK
DIAMETER:	2.474" Nominal
WEIGHT:	6734 lbs/M' Nominal
COLOR CODE:	Method 4

*Dimensions are nominal and are subject to standard industry tolerances

REVISIONS

0	11/21/2017	FIRST ISSUE

REFERENCES

600/3+2G VNTC (THHN/PVC) 600V M4

GCC P/N: 228670

General Cable | One Company Connecting the World

1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-5689

DRAWN BY: R. Paponetti

APPROVED BY: M. Vassallo

The text, graphics, charts, data and any other information set forth in this document is the confidential, proprietary and/or commercially-sensitive intellectual property of General Cable Corporation and its subsidiaries. Such information may not be copied, reproduced, publicly displayed or disclosed to third parties without the prior written consent of an officer of General Cable Corporation.