
Airport Lighting Cable

600 Volt and 5kV. Copper Conductor. XLP Insulation.

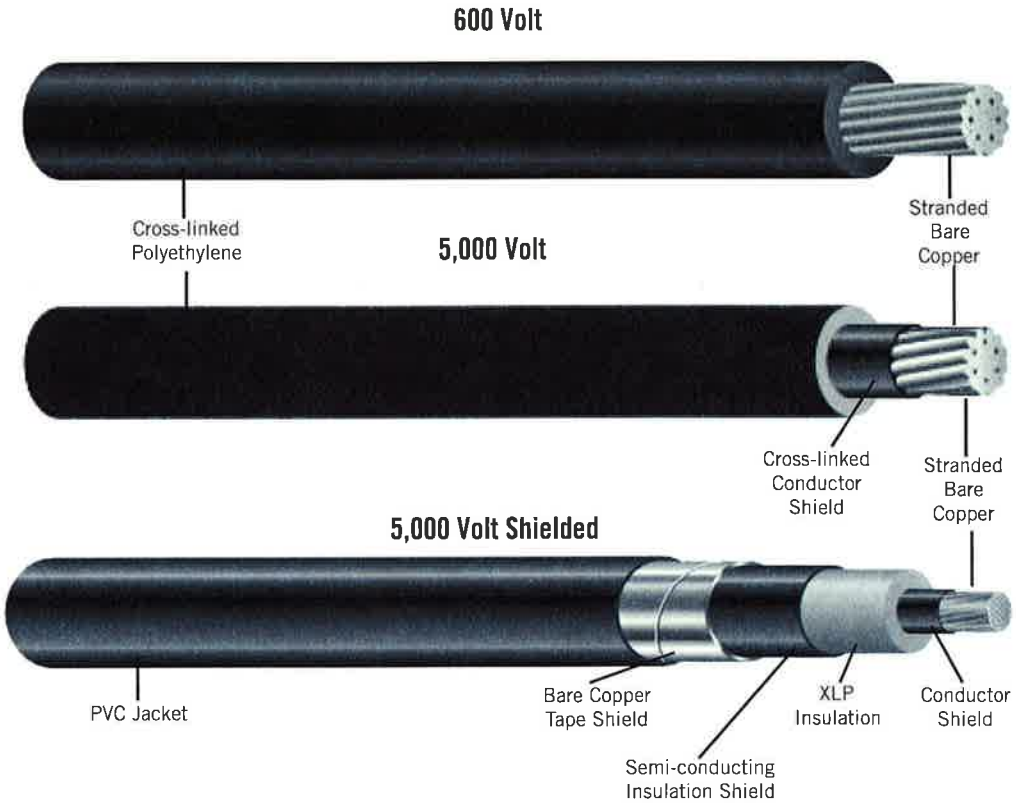

APPLICATIONS

Southwire Airport Lighting Cable is primarily used for series lighting circuits for runways, control systems, and other multi-purpose installations. It can be used for direct burial, conduit, or raceways. These cables are capable of operating continuously at a conductor temperature not in excess of 90°C for normal operation, 130°C for emergency overload conditions, and 250°C for short circuit conditions. Voltage rating for conductors is 600 volts and 5,000 volts.

SPECIFICATIONS

Southwire Airport Lighting Cable meets or exceeds FAA Specification L-824, AC150/5435-7E, and ICEA S-95-659 for non-shielded and ICEA S-93-639 for shielded.

CONSTRUCTION

Southwire Airport Lighting Cable conductors are annealed (soft) copper, compressed 7 strand. 600V cable insulation is an abrasion, moisture, and heat resistant black cross-linked polyethylene. 5kV non-shielded cable has an extruded track resistant cross-linked polyethylene insulation. 5KV shielded cable has a semi conducting shield, cross linked polyethylene insulation, copper tape shield and PVC jacket.

Southwire™
One Southwire Drive
Carrollton, GA 30119 USA

MADE IN ★ THE USA

WEIGHTS AND MEASUREMENTS 600 VOLTS						
SIZE	NUMBER OF STRANDS	INSULATION THICKNESS	NOMINAL O.D.	APPROXIMATE NET WEIGHT	PART NUMBERS	
AWG		inch	inch	lbs/ 1000 ft	AIW #'s	SW#'s
12	7	0.045	0.185	31	14727	TBD
10	7	0.045	0.210	44	24111	TBD
8	7	0.060	0.270	71	14728	TBD
6	7	0.060	0.310	105	14729	TBD
4	7	0.060	0.355	158	14730	TBD

WEIGHTS AND MEASUREMENTS 5,000 VOLTS UNSHIELDED						
SIZE	NUMBER OF STRANDS	INSULATION THICKNESS	NOMINAL O.D.	APPROXIMATE NET WEIGHT	PART NUMBERS	
AWG		inch	inch	lbs/ 1000 ft		
8	7	0.110	0.375	94	14723	551529
6	7	0.110	0.415	130	14724	551528
4	7	0.110	0.460	189	14726	551527

WEIGHTS AND MEASUREMENTS 5,000 VOLTS SHIELDED							
SIZE	NUMBER OF STRANDS	XLP INSULATION THICKNESS	PVC JACKET THICKNESS	APPROXIMATE NOMINAL O.D.	APPROXIMATE NET WEIGHT	PART NUMBERS	
AWG		inch	inch	inch	lbs/ 1000 ft		
8	7	0.090	0.060	0.610	175	19758	575345
6	7	0.090	0.060	0.645	240	19761	TBD
4	7	0.090	0.060	0.645	305	19762	TBD

RECOMMENDED SAMPLE SPECIFICATIONS:

Cross shall be FAA L-824, Type C, suitable for operation at 600 volts or 5kV in wet or dry locations. Conductors shall be annealed (soft) copper, compressed 7 strand. 600V cable insulation shall be abrasion, moisture, and heat resistant black cross-linked polyethylene. Cable shall be printed with conductor size, manufacturer, voltage, and FAA-L-824, Type C.

BW
10/1/10

Southwire
One Southwire Drive
Carrollton, GA 30119 USA

MADE IN THE USA