
BOSTRIG™ TYPE P POWER CABLE 600V OR 0.6/1kV

Four conductor / **unarmored**

TYPE P POWER CABLE **600V or 0.6/1kV, 8 AWG to 777 MCM**

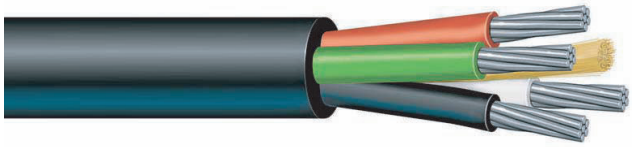

Applications

Bostrig™ Type P Marine and Offshore Cable is primarily designed for power, control, signal, and instrumentation applications for marine vessels, and offshore production facilities.

Bostrig™ cables have excellent resistance to oil, abrasion, moisture, vibration, sunlight, and ester based mud (Type P- MR). They are suitable for use in Class 1, Division 1 offshore applications (armored & sheathed).

The standard insulation has a continuous operating temperature of 125°C, allowing for higher ampacity levels. These cables also meet cold bend requirements of -40°C and cold impact of -35°C (CSA 22.2 NO. 0.3).

This product may be manufactured in an unarmored or armored and sheathed version.

Features/Ratings

- Superior resistance to oil, abrasion, moisture, sunlight, mud, crush and impact
- High strand count conductors provide superior flexibility
- Higher allowable conductor operating temperature results in increased ampacity
- Cold bend/ cold impact of -40°/ -35°C in accordance with CSA 22.2 No. 0.3
- Flame retardant in accordance with IEEE 1202 and IEC 60332-3-22 Category A
- Arctic neoprene jacket allows ease of stripping in all temperatures
- Meets IEEE standards for 600V and performance requirements of IEC standards for 0.6/ 1KV
- Unarmored cables suitable for Class 1, Division 2 and Zone 2 hazardous locations offshore
- Meets requirements for UL 1277 Type TC-ER for exposed runs

Approvals

IEEE 1580 and IEEE 45- Marine Shipboard Cable

UL 1309- Marine Shipboard Cable Type X110

CSA 22.2 No. 245- Marine Shipboard Cable Type X110

CSA 22.2 No. 230- Type TC-ER

CSA 22.2 No. 230 & No. 38 Direct Burial (#14 AWG & larger)

Det Norske Veritas (DNV)

American Bureau of Shipping (ABS)

Transport Canada Approved AMS400-20-2

Transport Canada 8700-20-2

Lloyd's Register of Shipping (LRS)

United States Coast Guard-46CFR

Construction

CONDUCTORS: Soft annealed stranded tinned copper per ASTM B 33. A polyester tape separator is used over the conductor.

INSULATION: Bostrig Type P chemically cross-linked polyolefin (XLPO), meeting IEEE 1580.

JACKET: Flame-retardant Arctic Neoprene, complying with Type N Neoprene as required in IEEE-1580. Thickness as shown in tables on opposite page.

BOSTRIG™ TYPE P POWER CABLE 600V OR 0.6/1kV

Four conductor / **unarmored**

TYPE P POWER CABLE **600V or 0.6/1kV, 8 AWG to 777 MCM**

A brand of the Prysmian Group

Type Designation	Draka Number	Conductor Size		Sheath Thickness		Cable Diameter (nominal)		Impedance (Phase-Neutral)		Inductance		Capacitance		Calulated Ampacity † (measured @ °C)				Cable Weight (approximate)	
		AWG/MCM	mm²	in	mm	in	mm	Ω/kft	Ω/km	mH/kft	mH/km	pF/ft	pF/m	95	100	110	125*	Lbs/Mft	Kg/Km
FPN-8	026079	8	7.57	0.060	1.5	0.690	17.5	0.70	2.3	0.12	0.4	95	312	47	52	56	63	375	375
FPN-6	026080	6	12.5	0.080	2.0	0.890	22.6	0.46	1.5	0.11	0.4	126	413	63	70	75	91	590	590
FPN-5	026081	5	18.6	0.080	2.0	0.960	24.4	0.33	1.1	0.11	0.4	140	459	78	82	88	120	750	750
FPN-4	026082	4	21.5	0.080	2.0	1.020	25.9	0.29	1.0	0.10	0.3	153	502	86	92	99	126	870	870
FPN-3	026083	3	25.6	0.080	2.0	1.110	28.2	0.23	0.8	0.10	0.3	173	567	99	108	116	148	1070	1070
FPN-2	026084	2	30.7	0.080	2.0	1.190	30.2	0.18	0.6	0.10	0.3	187	613	111	122	131	161	1260	1260
FPN-1	026085	1	46.1	0.080	2.0	1.360	34.5	0.14	0.5	0.09	0.3	178	584	137	143	153	202	1640	1640
FPN-1/0	026086	1/0	56.3	0.080	2.0	1.440	36.6	0.12	0.4	0.09	0.3	190	623	156	164	176	229	1955	1955
FPN-2/0	026087	2/0	66.5	0.080	2.0	1.540	39.1	0.09	0.3	0.09	0.3	212	695	175	188	201	254	2345	2345
FPN-3/0	026088	3/0	92.1	0.110	2.8	1.840	46.7	0.08	0.3	0.09	0.3	245	804	213	218	234	313	3265	3265
FPN-4/0	026089	4/0	112.6	0.110	2.8	1.910	48.5	0.07	0.2	0.09	0.3	259	850	241	252	270	354	3905	3905
FPN-262	026090	262	133.0	0.110	2.8	2.070	52.6	0.06	0.2	0.09	0.3	247	810	267	294	315	395	4605	4605
FPN-313	026091	313	158.6	0.110	2.8	2.300	58.4	0.05	0.2	0.09	0.3	270	886	298	321	344	442	5465	5465
FPN-373	026092	373	189.3	0.110	2.8	2.420	61.5	0.04	0.1	0.09	0.3	292	958	333	361	387	492	6235	6235
FPN-444	026093	444	225.1	0.110	2.8	2.580	65.5	0.04	0.1	0.09	0.3	318	1043	371	411	440	549	7400	7400
FPN-535	026094	535	271.2	0.140	3.6	2.940	74.7	0.04	0.1	0.09	0.3	291	954	417	443	475	608	8960	8960
FPN-646	026095	646	327.5	0.140	3.6	3.120	79.2	0.04	0.1	0.09	0.3	314	1030	469	516	553	678	10720	10720
FPN-777	026096	777	393.8	0.140	3.6	3.410	86.6	0.03	0.1	0.09	0.3	345	1132	528	562	602	750	12585	12585

This information is provided for reference only. Please consult the factory or your representative to confirm all engineering information.
This information is not intended to replace the information in the appropriate and applicable standard or code.
†Ampacity based on 45°C ambient temperature 95°C values based on ABS MODU Rules Table 6 - 100°C values based on IEEE-45 Table 25 - 110°C values based on API 14F.
The ampacity of 4 conductor cables is based on three current carrying conductors and the fourth conductor being used as a Neutral or Grounding conductor. If all conductors are current carrying,the ampacity must be reduced by 0.8.
*125°C ampacities based on 45°C ambient in free air. Consult factory for conditions of use.

Draka Marine, Oil & Gas
+1 281-209-1070 / +1 888-354-CABL (2225)
website: na.prysmiangroup.com/oil-gas

BOSTRIG™ TYPE P POWER CABLE 600V OR 0.6/1kV

Four conductor / **unarmored**

TYPE P POWER CABLE **600V or 0.6/1kV, 8 AWG to 777 MCM**

A brand of the Prysmian Group

				GLAND SELECTION			GLAND REFERENCE CHART	
Type Designation	Draka Number	Cable Diameter (nominal)		Explosion Proof: Unarmored	Non-Explosion Proof: Unarmored	Non-Explosion Proof: Unarmored	Explosion Proof: (Unarmored) Hub Size Reference	Non-Explosion Proof: (Unarmored) - NPT Thread Size Reference
		in	mm		(metric)	(NPT)		
FPN-8	026079	0.690	17.5	424UB-03/ 04	494AB-55	494NE-10/ 14	01 = 1/2"	03 = 1/2" - 14 NPT
FPN-6	026080	0.890	22.6	424UB-04	494AB-56	494NE-15/ 20	02 = 1/2"	04 = 1/2" - 14 NPT
FPN-5	026081	0.960	24.4	424UB-04/ 05/ 15	494AB-56/ 57	494NE-15/ 20/ 21/ 27	03 = 3/4"	05 = 1/2" - 14 NPT
FPN-4	026082	1.020	25.9	424UB-04/ 05/ 15	494AB-56/ 57	494NE-15/ 20/ 21/ 27	04 = 1"	08 = 3/4" - 14 NPT
FPN-3	026083	1.110	28.2	424UB-05/15	494AB-57	494NE-21/ 27	05 = 1 1/4"	10 = 3/4" - 14 NPT
FPN-2	026084	1.190	30.2	424UB-05/ 15/ 06	494AB-57	494NE-21/ 27	15 = 1 1/2"	14 = 1" - 11 1/2 NPT
FPN-1	026085	1.360	34.5	424UB-06	494AB-59	494NE-32	06 = 2"	15 = 1" - 11 1/2 NPT
FPN-1/0	026086	1.440	36.6	424UB-06	494AB-59	494NE-32	07 = 2 1/2"	20 = 1 1/4" - 11 1/2 NPT
FPN-2/0	026087	1.540	39.1	424UB-06	494AB-59	494NE-32	08 = 3"	21 = 1 1/4" - 11 1/2 NPT
FPN-3/0	026088	1.840	46.7	424UB-07	494AB-61	494NE-38	09 = 3 1/2"	27 = 1 1/2" - 11 1/2 NPT
FPN-4/0	026089	1.910	48.5	424UB-07	494AB-61	494NE-38		32 = 2" - 11 1/2 NPT
FPN-262	026090	2.070	52.6	424UB-07/ 08	494AB-62	494NE-44		38 = 2 1/2" - 8 NPT
FPN-313	026091	2.300	58.4	424UB-08/ 09	494AB-63	494NE-45		44 = 3" - 8 NPT
FPN-373	026092	2.420	61.5	424UB-08/ 09	494AB-63	494NE-45		45 = 3" - 8 NPT
FPN-444	026093	2.580	65.5	424UB-09	***	***		
FPN-535	026094	2.940	74.7	***	***	***		
FPN-646	026095	3.120	79.2	***	***	***		
FPN-777	026096	3.410	86.6	***	***	***		