
BOSTRIG™ TYPE P SIGNAL CABLE 600V OR 0.6/1kV

Individual and overall shielded multipair / **unarmored**
TYPE P SIGNAL CABLE **600V or 0.6/ 1kV, 16 & 14 AWG**

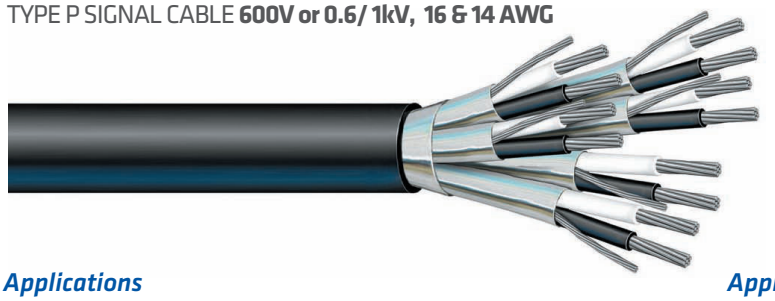

Applications

Bostrig™ Type P Marine and Offshore Cable is primarily designed for power, control, signal, and instrumentation applications for marine vessels, and offshore production facilities.

Bostrig™ cables have excellent resistance to oil, abrasion, moisture, vibration, sunlight, and ester based mud (Type P- MR). They are suitable for use in Class 1, Division 1 offshore applications (armored & sheathed).

The standard insulation has a continuous operating temperature of 125°C, allowing for higher ampacity levels. These cables also meet cold bend requirements of -40°C and cold impact of -35°C (CSA 22.2 NO. 0.3).

This product may be manufactured in an unarmored or armored and sheathed version.

Features/Ratings

- Superior resistance to oil, abrasion, moisture, sunlight, mud, crush and impact
- High strand count conductors provide superior flexibility
- Higher allowable conductor operating temperature results in increased ampacity
- Cold bend/ cold impact of -40°/ -35°C in accordance with CSA 22.2 No. 0.3
- Flame retardant in accordance with IEEE 1202 and IEC 60332-3-22 Category A
- Arctic neoprene jacket allows ease of stripping in all temperatures
- Meets IEEE standards for 600V and performance requirements of IEC standards for 0.6/ 1KV
- Unarmored cables suitable for Class 1, Division 2 and Zone 2 hazardous locations offshore
- Meets requirements for UL 1277 Type TC-ER for exposed runs

Approvals

IEEE 1580 and IEEE 45- Marine Shipboard Cable

UL 1309- Marine Shipboard Cable Type X110

CSA 22.2 No. 245- Marine Shipboard Cable Type X110

CSA 22.2 No. 239- Type CIC

Det Norske Veritas (DNV)

American Bureau of Shipping (ABS)

Transport Canada Approved AMS400-20-2

Transport Canada 8700-20-2

Lloyd's Register of Shipping (LRS)

United States Coast Guard-46CFR

Construction

CONDUCTORS: Soft annealed stranded tinned copper per ASTM B 33. A polyester tape separator is used over the conductor.

INSULATION: Bostrig Type P chemically cross-linked polyolefin (XLPO), meeting IEEE 1580.

SHIELD: An aluminum/polyester tape with drain wire, 100% coverage, is applied over each twisted pair and the cabled core. The single pair construction has only the overall shield.

JACKET: Flame-retardant Arctic Neoprene, complying with Type N Neoprene as required in IEEE-1580. Thickness as shown in tables on opposite page.

BOSTRIG™ TYPE P SIGNAL CABLE 600V OR 0.6/1kV

Individual and overall shielded multipair / **unarmored**

TYPE P SIGNAL CABLE **600V or 0.6/ 1kV, 16 & 14 AWG**

A brand of the Prysmian Group

16 AWG • 1.23 mm²

Type Designation	Draka Number	Number of Pairs	Stranding	Insulation Thickness		Sheath Thickness		Cable Diameter (nominal)		Cable Weight (approximate)	
				in	mm	in	mm	in	mm	Lbs/Mft	Kg/Km
TP(OS)16PN-1	026364	1	.030	0.76	0.060	1.5	0.360	9.1	75	110	95
TP(I/S-OS)16PN-2	026365	2	.030	0.76	0.060	1.5	0.580	14.7	160	240	120
TP(I/S-OS)16PN-3	026366	3	.030	0.76	0.060	1.5	0.620	15.7	210	315	135
TP(I/S-OS)16PN-4	026367	4	.030	0.76	0.060	1.5	0.670	17.0	250	370	135
TP(I/S-OS)16PN-5	026368	5	.030	0.76	0.060	1.5	0.750	19.1	295	440	135
TP(I/S-OS)16PN-6	026369	6	.030	0.76	0.060	1.5	0.790	20.1	375	560	135
TP(I/S-OS)16PN-7	026370	7	.030	0.76	0.060	1.5	0.790	20.1	365	545	135
TP(I/S-OS)16PN-8	026371	8	.030	0.76	0.080	2.0	0.900	22.9	485	720	135
TP(I/S-OS)16PN-10	026372	10	.030	0.76	0.080	2.0	1.020	25.9	545	810	135
TP(I/S-OS)16PN-12	026373	12	.030	0.76	0.080	2.0	1.030	26.2	625	930	135
TP(I/S-OS)16PN-16	026374	16	.030	0.76	0.080	2.0	1.180	30.0	795	1185	135
TP(I/S-OS)16PN-20	026375	20	.030	0.76	0.080	2.0	1.310	33.3	1085	1615	135
TP(I/S-OS)16PN-24	026376	24	.030	0.76	0.080	2.0	1.420	36.1	1130	1680	155

14 AWG • 1.94 mm²

Type Designation	Draka Number	Number of Pairs	Stranding	Insulation Thickness		Sheath Thickness		Cable Diameter (nominal)		Cable Weight (approximate)	
				in	mm	in	mm	in	mm	Lbs/Mft	Kg/Km
TP(OS)14PN-1	026377	1	.030	0.76	0.060	1.5	0.390	9.9	90	135	95
TP(I/S-OS)14PN-2	026378	2	.030	0.76	0.060	1.5	0.640	16.3	195	290	120
TP(I/S-OS)14PN-3	026379	3	.030	0.76	0.060	1.5	0.670	17.0	275	410	135
TP(I/S-OS)14PN-4	026380	4	.030	0.76	0.060	1.5	0.730	18.5	320	475	135
TP(I/S-OS)14PN-5	026381	5	.030	0.76	0.060	1.5	0.810	20.6	345	515	135
TP(I/S-OS)14PN-6	026382	6	.030	0.76	0.080	2.0	0.920	23.4	450	670	135
TP(I/S-OS)14PN-7	026383	7	.030	0.76	0.080	2.0	0.930	23.6	510	760	135
TP(I/S-OS)14PN-8	026384	8	.030	0.76	0.080	2.0	0.970	24.6	620	925	135
TP(I/S-OS)14PN-10	026385	10	.030	0.76	0.080	2.0	1.130	28.7	710	1055	135
TP(I/S-OS)14PN-12	026386	12	.030	0.76	0.080	2.0	1.170	29.7	805	1200	135
TP(I/S-OS)14PN-16	026387	16	.030	0.76	0.080	2.0	1.300	33.0	975	1450	135
TP(I/S-OS)14PN-20	026388	20	.030	0.76	0.080	2.0	1.490	37.8	1280	1905	135
TP(I/S-OS)14PN-24	026389	24	.030	0.76	0.080	2.0	1.650	41.9	1515	2255	155

This information is provided for reference only. Please consult the factory or your representative to confirm all engineering information.
This information is not intended to replace the information in the appropriate and applicable standard or code.

Draka Marine, Oil & Gas
+1 281-209-1070 / +1 888-354-CABL (2225)
website: na.prysmiangroup.com/oil-gas

BOSTRIG™ TYPE P SIGNAL CABLE 600V OR 0.6/1kV

Individual and overall shielded multipair / **unarmored**

TYPE P SIGNAL CABLE **600V or 0.6/ 1kV, 16 & 14 AWG**

A brand of the Prysmian Group

16 AWG • 1.23 mm²

				GLAND SELECTION			GLAND REFERENCE CHART	
Type Designation	Draka Number	Cable Diameter (nominal)		Explosion Proof: Unarmored	Non-Explosion Proof: Unarmored	Non-Explosion Proof: Unarmored	Explosion Proof: (Unarmored) Hub Size Reference	Non-Explosion Proof: (Unarmored) - NPT Thread Size Reference
		in	mm		(metric)	(NPT)		
TP(OS)16PN-1	026364	0.360	9.1	424UB-01/ 02	494AB-52/ 53	494NE-04/ 05/ 08	01 = 1/2"	03 = 1/2" - 14 NPT
TP(I/S-OS)16PN-2	026365	0.580	14.7	424UB-02/ 03	494AB-53/ 55	494NE-05/ 08/ 10/ 14	02 = 1/2"	04 = 1/2" - 14 NPT
TP(I/S-OS)16PN-3	026366	0.620	15.7	424UB-02/ 03	494AB-53/ 55	494NE-05/ 08/ 10/ 14	03 = 3/4"	05 = 1/2" - 14 NPT
TP(I/S-OS)16PN-4	026367	0.670	17.0	424UB-03/ 04	494AB-55	494NE-10/ 14	04 = 1"	08 = 3/4" - 14 NPT
TP(I/S-OS)16PN-5	026368	0.750	19.1	424UB-03/ 04	494AB-55/ 56	494NE-10/ 14/ 15/ 20	05 = 1 1/4"	10 = 3/4" - 14 NPT
TP(I/S-OS)16PN-6	026369	0.790	20.1	424UB-04	494AB-55/ 56	494NE-10/ 14/ 15/ 20	15 = 1 1/2"	14 = 1" - 11 1/2 NPT
TP(I/S-OS)16PN-7	026370	0.790	20.1	424UB-04	494AB-55/ 56	494NE-10/ 14/ 15/ 20	06 = 2"	15 = 1" - 11 1/2 NPT
TP(I/S-OS)16PN-8	026371	0.900	22.9	424UB-04	494AB-56	494NE-15/ 20	07 = 2 1/2"	20 = 1 1/4" - 11 1/2 NPT
TP(I/S-OS)16PN-10	026372	1.020	25.9	424UB-04/ 05/ 15	494AB-56/ 57	494NE-15/ 20/ 21/ 27	08 = 3"	21 = 1 1/4" - 11 1/2 NPT
TP(I/S-OS)16PN-12	026373	1.030	26.2	424UB-04/ 05/ 15	494AB-56/ 56	494NE-15/ 20/ 21/ 27	09 = 3 1/2"	27 = 1 1/2" - 11 1/2 NPT
TP(I/S-OS)16PN-16	026374	1.180	30.0	424UB-05/ 15/ 06	494AB-57	494NE-21/ 27		32 = 2" - 11 1/2 NPT
TP(I/S-OS)16PN-20	026375	1.310	33.3	424UB-06	494AB-57/ 59	494NE-21/ 27/ 32		38 = 2 1/2" - 8 NPT
TP(I/S-OS)16PN-24	026376	1.420	36.1	424UB-06	494AB-59	494NE-32		44 = 3" - 8 NPT
								45 = 3" - 8 NPT

14 AWG • 1.94 mm²

				GLAND SELECTION			GLAND REFERENCE CHART	
Type Designation	Draka Number	Cable Diameter (nominal)		Explosion Proof: Unarmored	Non-Explosion Proof: Unarmored	Non-Explosion Proof: Unarmored	Explosion Proof: (Unarmored) Hub Size Reference	Non-Explosion Proof: (Unarmored) - NPT Thread Size Reference
		in	mm		(metric)	(NPT)		
TP(OS)14PN-1	026377	0.390	9.9	424UB-02	494AB-52/ 53	494NE-04/ 05/ 08	01 = 1/2"	03 = 1/2" - 14 NPT
TP(I/S-OS)14PN-2	026378	0.640	16.3	424UB-03	494AB-55	494NE-10/ 14	02 = 1/2"	04 = 1/2" - 14 NPT
TP(I/S-OS)14PN-3	026379	0.670	17.0	424UB-03/ 04	494AB-55	494NE-10/ 14	03 = 3/4"	05 = 1/2" - 14 NPT
TP(I/S-OS)14PN-4	026380	0.730	18.5	424UB-03/ 04	494AB-55	494NE-10/ 14	04 = 1"	08 = 3/4" - 14 NPT
TP(I/S-OS)14PN-5	026381	0.810	20.6	424UB-04	494AB-55/ 56	494NE-10/ 14/ 15/ 20	05 = 1 1/4"	10 = 3/4" - 14 NPT
TP(I/S-OS)14PN-6	026382	0.920	23.4	424UB-04	494AB-56	494NE-15/ 20	15 = 1 1/2"	14 = 1" - 11 1/2 NPT
TP(I/S-OS)14PN-7	026383	0.930	23.6	424UB-04	494AB-56	494NE-15/ 20	06 = 2"	15 = 1" - 11 1/2 NPT
TP(I/S-OS)14PN-8	026384	0.970	24.6	424UB-04/ 05/ 15	494AB-56/ 57	494NE-15/ 20/ 21/ 27	07 = 2 1/2"	20 = 1 1/4" - 11 1/2 NPT
TP(I/S-OS)14PN-10	026385	1.130	28.7	424UB-05/ 15	494AB-57	494NE-21/ 27	08 = 3"	21 = 1 1/4" - 11 1/2 NPT
TP(I/S-OS)14PN-12	026386	1.170	29.7	424UB-05/ 15/ 06	494AB-57	494NE-21/ 27	09 = 3 1/2"	27 = 1 1/2" - 11 1/2 NPT
TP(I/S-OS)14PN-16	026387	1.300	33.0	424UB-06	494AB-57/ 59	494NE-21/ 27/ 32		32 = 2" - 11 1/2 NPT
TP(I/S-OS)14PN-20	026388	1.490	37.8	424UB-06	494AB-59	494NE-32		38 = 2 1/2" - 8 NPT
TP(I/S-OS)14PN-24	026389	1.650	41.9	424UB-06/07	494AB-61	494NE-38		44 = 3" - 8 NPT
								45 = 3" - 8 NPT