
COMMODITY CABLES, INC.

# CAT6 550 OUTDOOR WATER BLOCK

**6OUTW234RB: CAT6 550 OUTDOOR 23/4 1000'DIRECT BURIAL, WATER BLOCK TAPE, BLACK, WOOD REEL**

| Content of the Data Sheet | | | | | |
|---|---|---|---|---|---|
| Part number | 6OUTW234RB | | | | |
| Category | U/UTP ZS CAT6-4P-PE | | | | |
| Test Standard | ISO/IEC11801、TIA- 568-C.2 YD/T 1019 | | | | |
| Conductor | Material | Solid Bare copper | | | |
| | Nom.O.D.(mm) | 0.55 | up | +0.005 | |
| | | | down | -0.005 | |
| Insulation | Material | HDPE | | | |
| | Diameter | 1.07±0.03 mm | | | |
| wrapping | Water Blocking Swellable tape +PET tape | | | | |
| Sheath | Thickness | 0.60±0.05mm | | | |
| | External O.D. | 7.5±0.4 mm | | | |
| | Surface | Clean,Frap,Satiation | | | |
| | Material | LDPE (complies RoHS) U.V Resistant | | | |
| | Color | According to the requires | | | |
| Surface Printing | Letter height | 3.0±0.3mm | | | |
| | Color | White | | | |
| | Print error & Space | ≤±0.5%，1m | | | |
| Core Color | 1 White- Blue /Blue | 2 White-Orange /Orange | | | |
| | 3 White- Green /Green | 4 White- Brown /Brown | | | |
| Packing | Wooden Reel | | | | |
| Weight | 36 lbs | | | | |
| Packing length | 305±1.5m | | | | |
| Rip-cord | Yes | Drain wire | N/A | | |
| Sheath Physical Properties | Before Aging Tensile Strength (Mpa) ≥10.0<br>Elongation(%) ≥350 | | | | |
| | Aging Period (℃×hrs) 100℃×24h×10d | | | | |
| | After Aging Elongation(%) ≥300 | | | | |
| | Cold bend(-20±2□×4h) 8×Cable O.D.，<br>No visible cracks | | | | |
| Electrical Characteristics (20□) | Delay Shew (ns/100m) ≤45 | | | | |
| | Velocity of Propagation (%) 68 | | | | |
| | DC Resistance (Ω/100m) max 9.38 | | | | |
| | DC Conductor Resistance Unbalance (%) max 5.0 | | | | |
| Temperature Range: | -45℃ to + 60℃ | | | | |

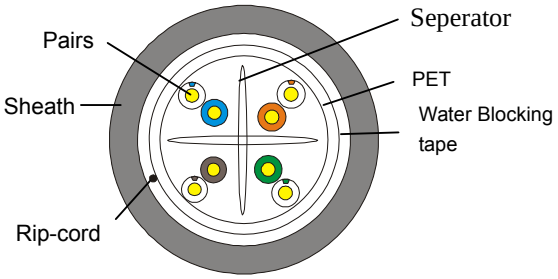


Technical Performance (100m):

| Frequency (MHz) | RL ≥dB | ATT ≤dB | NEXT ≥dB | DELAY ≤ns |
|---|---|---|---|---|
| 1 | 20.0 | 2.03 | 74.3 | 570.00 |
| 4.0 | 23.0 | 3.78 | 65.3 | 552.00 |
| 8.0 | 24.5 | 5.32 | 60.8 | 546.73 |
| 10.0 | 25.0 | 5.95 | 59.3 | 545.38 |
| 16.0 | 25.0 | 7.55 | 56.2 | 543.00 |
| 20.0 | 25.0 | 8.47 | 54.8 | 542.05 |
| 25.0 | 24.3 | 9.51 | 53.3 | 541.20 |
| 31.25 | 23.6 | 10.67 | 52.0 | 540.44 |
| 62.5 | 21.5 | 15.38 | 47.4 | 538.55 |
| 100 | 20.1 | 19.80 | 44.3 | 537.60 |
| 200 | 18.0 | 28.98 | 39.8 | 536.54 |
| 250 | 17.3 | 32.85 | 38.3 | 536.27 |
| *400 | 15.9 | 42.97 | 35.3 | 535.50 |
| *550 | 14.9 | 51.76 | 33.2 | 535.54 |

| Frequency (MHz) | PSNEXT ≥dB | ELFEXT ≥dB | PSELFEXT ≥dB |
|---|---|---|---|
| 1 | 72.3 | 68.0 | 65.0 |
| 4 | 63.3 | 56.0 | 53.0 |
| 8 | 58.7 | 49.9 | 46.9 |
| 10 | 57.3 | 48.0 | 45.0 |
| 16 | 54.2 | 43.9 | 40.9 |
| 20 | 52.8 | 42.0 | 39.0 |
| 25 | 51.3 | 40.0 | 37.0 |
| 31.25 | 49.9 | 38.1 | 35.1 |
| 62.5 | 45.4 | 32.1 | 29.1 |
| 100 | 42.3 | 28.0 | 25.0 |
| 200 | 37.8 | 22.0 | 19.0 |
| 250 | 36.3 | 20.0 | 17.0 |
| *400 | 33.7 | 15.7 | 12.7 |
| *550 | 31.2 | 12.9 | 9.9 |