
COMMODITY CABLES, INC.


www.commoditycables.com

4PAIR 23AWG CAT 6E 600MHz. CMP UTP CABLE

Cross Section

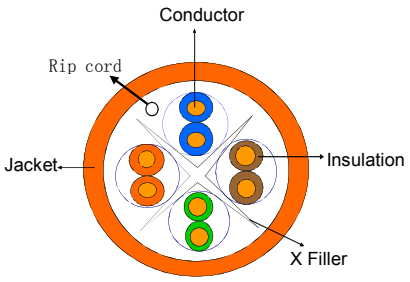

Part No.: 6CMP234xx



Description

Category 6, 4 pair, 23awg, UTP, CMP, Plenum, Horizontal (Solid) Cable

Reference Standard

ANSI/EIA/TIA 568-C.2 with applicable electrical transmission characteristics

Application

High Speed Data Application	Digital Video
622 Mbps ATM	Gigabit Ethernet
100 Mbps TPDDI	IEEE802.3 / IEEE802.5
100 Base T	

Jacket Colors

Standard:	Blue, White, Green, Yellow, Gray, Black, Orange, Red, Purple
Special:	Per customer request

Construction

Conductor	Solid Bare Copper
AWG	23
Conductor Dia.(mm)	0.540
Insulation	Teflon
Average Thickness(mm)	0.25
Min.Point Thickness(mm)	0.17
Insulation Dia.(±0.02mm)	1
Twisting Lay Length(mm)	30 underneath
Cabling Lay Length(±20mm)	140
Jacket	Low Smoke PVC
Average Thickness(mm)	0.5
Min.Point Thickness(mm)	0.43
Outer Dia.(±0.2mm)	6.0
Rip Cord	Yes

Insulation Colors

Pair 1:	Blue, White/Blue
Pair 2:	Orange, White/Orange
Pair 3:	Green, White/Green
Pair 4:	Brown, White/Brown

Performance

Electrical Characteristics:

Frequency (MHz)	Attenuation (dB/100m)	NEXT (dB)	ACR (db)	PSNEXT (dB)	ELFEXT (dB/100m)	PSELFEXT (dB/100m)
0.772	1.8	76.0	74.2	74.0	-	-
1	2.0	74.3	72.3	72.3	67.8	64.8
4	3.8	65.3	61.5	63.3	55.7	52.8
8	5.3	60.8	55.4	58.8	49.7	46.7
10	6.0	59.3	53.3	57.3	47.8	44.8
16	7.6	56.2	48.6	54.2	43.7	40.7
20	8.5	54.8	46.2	52.8	41.7	38.8
25	9.5	53.3	43.7	51.3	39.8	36.8
31.25	10.7	51.9	41.1	49.9	37.9	34.8
62.5	15.7	47.4	31.7	45.4	31.8	28.9
100	19.8	44.3	24.1	42.3	27.8	24.8
200	29.0	39.8	10.0	37.8	21.8	18.8
250	32.8	38.3	4.6	36.3	19.8	16.8
300	36.4	37.1	0.7	35.1	18.3	15.3
350	39.8	36.1	-	34.1	16.9	13.9
400	43.0	35.3	-	33.3	15.8	12.8
500	48.9	33.8	-	31.8	13.8	10.8
550	51.8	33.2	-	31.2	13.0	10.0
600	54.2	32.9	-	-	-	-

**Electrical performance with frequency over 250MHz is only for reference.*

1.0-100.0MH Impedance(ohms)	100±15
1.0-100.0MH Delay Skew(ns/100m)	<=45
Pair-to-Ground Capacitance Unbalance(Pf/100m)	<=330
Max. Conductor DC Resistance 20°C (ohms/km)	9.38
Resistance Unbalance(%)	<=5


Mechanical Characteristics:

Test Object	Jacket
Test Material	LS-PVC
Before Tensile Strength(Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition(°Cxhrs)	100x240
After Tensile Strength (Mpa)	>=85% of unaged
After Elongation (%)	>=50% of unaged
Cold Bend(-20±2°Cx4hrs)	No crack

Standard Packaging



Spool in a Box
Weight: 39 lbs.



Pull Box
Weight: 38 lbs.

*All dimensional values in this specification are nominal and are subjective to tolerances of +/-10%.

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.