
COMMODITY CABLES, INC.
www.commoditycables.com

CAT6 550 OUTDOOR DIRECT BURIAL SHIELD GEL FILLED

6OUTGSHDRB: CAT6 550 OUTDOOR DIRECT BURIAL, SHIELDED FTP, GEL FILLED, 23/4 1000' WOODEN REEL.

Content of the Data Sheet					
Part number	6OUTGSHDRB				
Category	F/UTP- ZST CAT6-4P-PE				
Test Standard	ISO/IEC11801、TIA- 568-C.2 YD/T 1019				
Conductor	Material	Solid Bare copper			
	Nom.O.D.(mm)	0.565	up	+0.005	
			down	-0.005	
Insulation	Material	HDPE			
	Diameter	1.09±0.03 mm			
Screening Material	Mylar +Al/Mylar				
Sheath	Thickness	0.60±0.05mm			
	External O.D.	7.8±0.4 mm			
	Surface	Clean,Frap,Satiation			
	Material	LDPE (complies RoHS)			
	Color	Black			
Surface Printing	Letter height	3.0±0.3mm			
	Color	White			
	Print error & Space	≤±0.5%，1m			
Core Color	1 White- Blue /Blue	2 White-Orange /Orange			
	3 White- Green /Green	4 White- Brown /Brown			
Packing	Wooden Reel				
Weight	36 lbs				
Packing length	305±1.5m				
Rip-cord	Yes	Drain wire	Yes		
Sheath Physical Properties	Before Aging Tensile Strength (Mpa) ≥10.0 Elongation(%) ≥350				
	Aging Period (℃×hrs) 100℃×24h×10d				
	After Aging Elongation(%) ≥300				
	Cold bend(-20±2□×4h) 8×Cable O.D.， No visible cracks				
Electrical Characteristics (20□)	Delay Shew (ns/100m) ≤45				
	Velocity of Propagation (%) 68				
	unbalanced-to-ground capacitance (pf/100m) max 330				
	DC Resistance (Ω/100m) max 9.38				

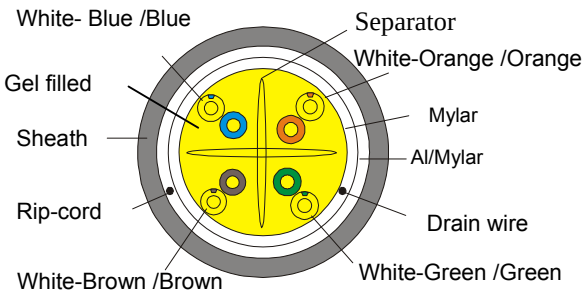

Technical Performance (100m):

Frequency (MHz)	RL dB	ATT dB	NEXT dB	DELAY ns
1	20.0	2.03	74.3	570.00
4.0	23.0	3.78	65.3	552.00
8.0	24.5	5.32	60.8	546.73
10.0	25.0	5.95	59.3	545.38
16.0	25.0	7.55	56.2	543.00
20.0	25.0	8.47	54.8	542.05
25.0	24.3	9.51	53.3	541.20
31.25	23.6	10.67	52.0	540.44
62.5	21.5	15.38	47.4	538.55
100	20.1	19.80	44.3	537.60
200	18.0	28.98	39.8	536.54
250	17.3	32.85	38.3	536.27
*350	16.3	39.79	36.1	535.92
*550	12.6	61.7	33.2	535.5

Frequency (MHz)	PSNEXT dB	ELFEXT dB	PSELFEXT dB
1	72.3	68.0	65.0
4	63.3	56.0	53.0
8	58.7	49.9	46.9
10	57.3	48.0	45.0
16	54.2	43.9	40.9
20	52.8	42.0	39.0
25	51.3	40.0	37.0
31.25	49.9	38.1	35.1
62.5	45.4	32.1	29.1
100	42.3	28.0	25.0
200	37.8	22.0	19.0
250	36.3	20.0	17.0
*350	34.1	16.9	13.9
*550	31.2	13.2	10.1

Remarks: * are the reference values