
# 6 Fiber InfiniCor® 300 Dry Loose Tube Cable, Riser

## Description

The Light Connection's Single Subunit Dry Loose Tube Cable is composed of water blocking aramid yarn, an aramid ripcord, and a PVC outer Jacket. The subunit contains six colored bare optical fibers, water swellable yarn within a 3mm PVC jacket. All component materials meet the EU RoHS and REACH Directive standards.
TLC Dry Loose Tube Cable is available in 12 TIA standard colors or special order colors. UL Listed OFNR cables are available, and unlisted, unrated cables may be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, fiber type, and includes footage markers. Custom print may also be accommodated.

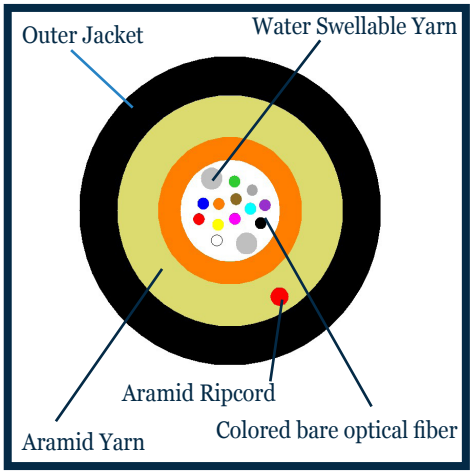


## SPECIFICATIONS

| Temperature Range | |
|---|---|
| Storage Temperature | -40 C to +70 C |
| Operating Temperature | -20 C to +70 C |

| Cable Characteristics | | | |
|---|---|---|---|
| ***Mechanical*** | | ***Optical*** | |
| Fiber Count | 6 | Fiber Type | InfiniCor® 300 |
| Strength Member | Aramid Yarn | Core Size | 62.5/125 |
| Overall Jacket Material | Poly Vinyl Chloride | Attenuation(MAX) | 3.50dB/km @850nm |
| Nominal Outer Diameter (mm) | 6.00 | Bandwidth (LED) 850/1300nm | 200/500MHz.km |
| Bend Radius [Install/Operate](cm) | 9.0/6.0 | Numerical Aperture | 0.275 |
| Weight (lbs/km) | 27 | Link Length 1Gb/s[850/ 1300nm] | 300mtr / 550mtr |

plus CORNING Optical Fiber
RoHS
Specifications are subject to change without notice.

The Light Connection Inc.
132 Base Road
Oriskany, NY, 13424
Phone: 315-736-7384
Fax: 315-736-1927
Toll free: 1-888-571-7111
sales@thelightconnection.com
www.thelightconnection.com