Drawing / Data Sheet

Single Conductor EmPowr® Link Concentric Neutral (Round Wire) Power Cable 15kV

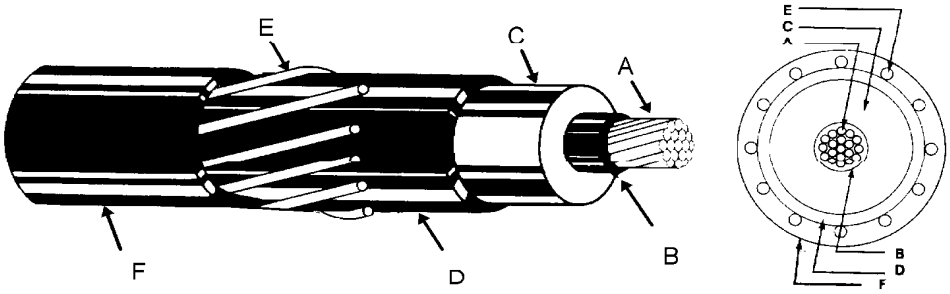

Representative drawing not to scale

Component Description	Thickness (inches)			Diameter (inches)		
	Min.	Nom.*	Max.	Min.	Nom.*	Max.
A: Conductor 2 AWG Class B Compressed Stranded Bare CU Conductor	--	--	--	0.277	0.283	0.289
B: Conductor Shield Semiconducting Thermoset Polymer	0.012	0.018	--	--	0.319	--
C: Insulation **Insulation Level** Tree Retardant Crosslinked Polyethylene 133%	0.210	0.220	0.250	0.725	0.759	0.815
D: Insulation Shield Semiconducting Thermoset Polymer	0.030	0.035	0.060	0.785	0.829	0.915
E: Concentric Neutral / Metallic Shield 16 x 14 AWG Bare Copper Round Wire	--	--	--	--	0.945	--
F: Jacket Extruded-To-Fill Linear Low Density Polyethylene w/ 3 Red Extruded Stripes	0.045	0.055	0.080	--	1.055	--
Single Conductor Finished Cable Nominal Weight: 736 lb/kft *						

* - Nominal Values are Subject to Manufacturing Tolerances; Bold Font Indicates Minimum Average Values

Customer:	INDUSTRY STANDARD	**Customer P/N:**	**EA/PC Number:**
			481977 Rev. 0
Specification / Standard:	AEIC CS8-07, ICEA S-94-694	**Prepared By:**	**Date:**
		HQQUADS	9/25/2012

Dimensions and weights not designated minimum or maximum are nominal and subject to manufacturing tolerances.

The information contained in this document is the exclusive and proprietary intellectual property of General Cable Corporation, and any reproduction or disclosure, in whole or in part, is prohibited without the express written consent of an officer of General Cable Corporation.

©General Cable Corporation 2012, all rights reserved.