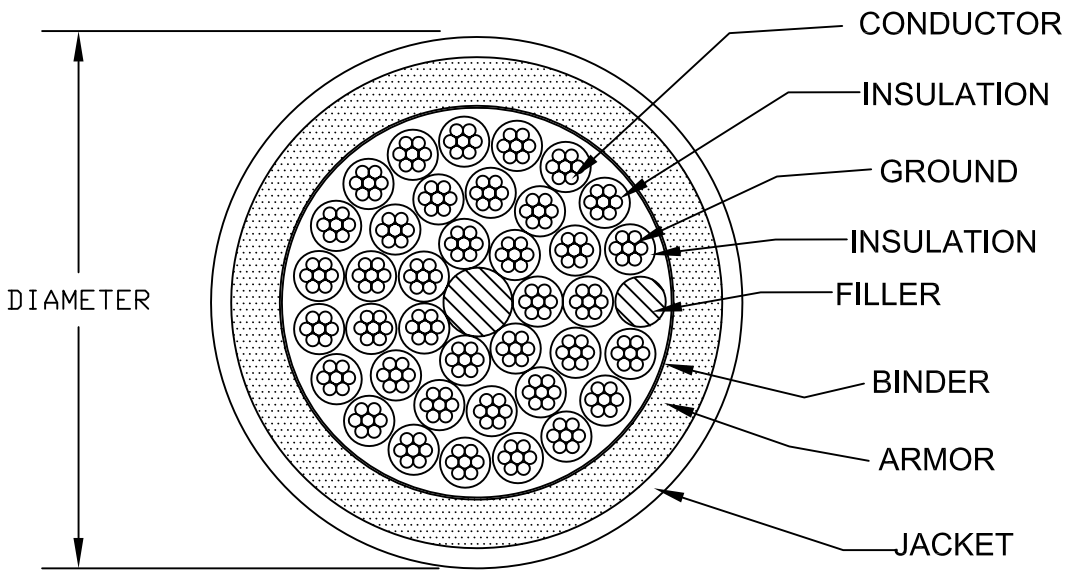


CONDUCTOR:	#14AWG (7/w) Bare Copper Class B Strand per ASTM B8, B33
INSULATION:	0.030" Min. Avg. Wall, Cross-Linked Polyethylene (XLPE), E2 Color Code
GROUND:	#14AWG (7/w) Bare Copper Class B Strand per ASTM B8, B33
INSULATION:	0.030" Min. Avg. Wall, Cross-Linked Polyethylene (XLPE), Green
CABLE:	Thirty-Seven (37) Insulated Primaries, One (1) Insulated Ground and Fillers Cabled Together With a Left Hand Lay and Wrapped with a Binder Tape
FILLER:	Polypropylene as necessary for roundness
BINDER:	Polyester Binder Tape
ARMOR:	Impervious, Continuously Welded and Corrugated Aluminum Alloy Sheath
JACKET:	0.050" Min. Avg. Wall, Flame-Retardant Polyvinyl Chloride (PVC), Black
PRINT LEGEND:	GENERAL CABLE® (WC) CCW 37C 14AWG WITH GRND 600V (UL) TYPE MC-HL XHHW-2 -40C DIR BUR SUN RES FOR CT USE 90C WET OR DRY FT4/IEEE 1202 OR CWCMC X90 UL 1309 OR (CSA) 600V RA90 XLPE(-40C) FT4 HL SR AG14 OR ABS DAY/MONTH/YEAR PLUS SEQUENTIAL FOOTAGE MARK
DIAMETER:	1.350" Nominal
WEIGHT:	1022 lbs/kft Nominal

Weights and dimensions are nominal and subject to standard manufacturing tolerances.

REVISIONS

0	05/15/18	FIRST ISSUE

REFERENCES

37C14+14GND MC HL 600V CCW

GCC P/N: 9500.01437114

General Cable | One Company Connecting the World

1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-5787

DRAWN BY: P. GOTTIER | APPROVED BY: E. ABERBACH

The text, graphics, charts, data and any other information set forth in this document is the confidential, proprietary and/or commercially-sensitive intellectual property of General Cable Corporation and its subsidiaries. Such information may not be copied, reproduced, publicly displayed or disclosed to third parties without the prior written consent of an officer of General Cable Corporation.