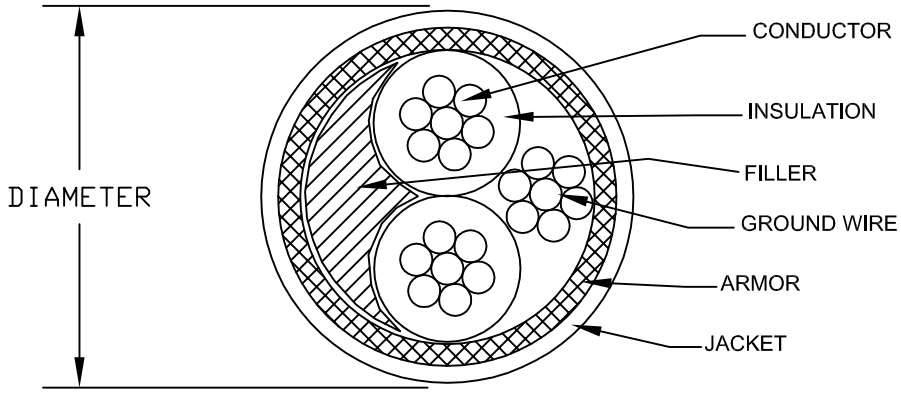


CONDUCTOR:	#10AWG (7/w) Bare Copper Class B Strand per ASTM B3, B8
INSULATION:	0.030" Min. Avg. Wall, Flame-Retardant Cross-Linked Polyethylene (XLPE)
CABLE:	Two (2) Insulated Conductors, One (1) Ground Wire and One (1) Filler Cabled Together With a Left Hand Lay
FILLERS:	As necessary for roundness
GROUND:	#10AWG (7/w) Bare Copper Class B Strand per ASTM B3, B8
ARMOR:	Aluminum Interlocked Armor (AIA)
JACKET:	0.050" Min. Avg. Wall, Flame-Retardant Polyvinyl Chloride (PVC), Black
PRINT LEGEND:	"GENERAL CABLE® (WC) 2/C 10AWG (UL) TYPE MC XHHW-2 CDRS DIR BUR SUN RES FOR CT USE 600V DAY/MONTH/ YEAR PLUS SEQUENTIAL FOOTAGE MARK"
DIAMETER:	0.710" Nominal
WEIGHT:	245 lbs/M' Nominal
COLOR CODE:	ICEA Method 1, Table E-2

*Dimensions & weights are nominal and subject to standard manufacturing tolerances.

REVISIONS

0	08/15/2014	FIRST ISSUE

REFERENCES

10/2 + 10G XLP AIA 600V Method 1 E-2

GCC P/N 438060

General Cable | Dre Company Connecting the World

1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-3975

DRAWN BY: P. CHURCHILL | APPROVED BY: P. GOTTIER

THE TEXT, GRAPHICS, CHARTS, DATA AND ANY OTHER INFORMATION SET FORTH IN THIS DOCUMENT IS THE CONFIDENTIAL, PROPRIETARY AND/OR COMMERCIALLY-SENSITIVE INTELLECTUAL PROPERTY OF GENERAL CABLE CORPORATION AND ITS SUBSIDIARIES. SUCH INFORMATION MAY NOT BE COPIED, REPRODUCED, PUBLICLY DISPLAYED OR DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF AN OFFICER OF GENERAL CABLE CORPORATION. © GENERAL CABLE TECHNOLOGIES CORP. 2010