Duralox® Uniblend®

EPR/AIA/PVC, Power, Shielded, Armored
15 kV, UL Type MV-105 or MC, 133% Ins. Level, 220 Mils, Three Conductor

Product Construction:

Conductors:
- 2 AWG thru 1000 kcmil bare, copper compact Class B strand

Extruded Strand Shield (ESS):
- Thermoset semi-conducting extruded stress control layer over conductor

Insulation:
- Ethylene Propylene Rubber (EPR) insulation, colored to contrast with black conducting layers

Extruded Insulation Shield (EIS):
- Thermoset semi-conducting polymeric layer free stripping from insulation

Shield:
- 5 mil annealed copper tape with a minimum 25% overlap


Ground:
- Annealed bare copper Class B stranding per ASTM B8

Armor:
- Aluminum Interlocked Armor (AIA)

Jacket:
- Flame-retardant, moisture- and sunlight-resistant Polyvinyl Chloride (PVC), red

Print:
- GENERAL CABLE® SIZE (KCMIL OR AWG) COMPACT CU 3/C (INS THICKNESS) MILS EPR TYPE MV-105 OR MC 3/C SIZE AWG GRD VOLTAGE kV% INS LEVEL SUN RES FOR CT USE DIR BUR (UL) LIGHTING BOLT SYMBOL MONTH-YEAR SEQUENTIAL FOOTAGE MARK

Options:
- Other constructions available upon request

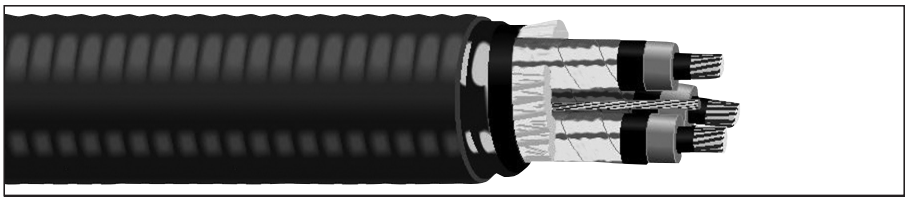

Applications:
- Ideally suited for use in a broad range of commercial, industrial and utility applications where reliability is the major concern, maximum performance is demanded, space is limited, ease of installation is critical and fire resistance is necessary
- Installed in wet or dry locations, indoors or outdoors, in exposed or concealed work
- May be used in cable trays or on approved support in protected areas
- Permitted for use in Class I; Class II, Division 2; and Class III, Divisions 1 and 2 hazardous locations per the NEC

Features:
- Rated at 105˚C wet or dry
- Excellent heat and moisture resistance
- Outstanding corona resistance
- Flexibility for easy handling
- High dielectric strength
- Low moisture absorption
- Low dielectric loss
- Electrical stability under stress
- Chemical- and radiation-resistant
- Excellent crush resistance
- Cost-effective alternative to installations in conduit
- Meets cold bend test at -25˚C

Compliances:
Industry Compliances:
- UL 1072
- ICEA S-93-639/NEMA WC74
- AEIC CS8
- UL Type MV-105, UL File # E90501
- UL Type MC, UL File # E90496

Flame Test Compliances:
- IEEE 383 (70,000 BTU/hr)
- UL 1581 (70,000 BTU/hr)
- IEEE 1202 (70,000 BTU/hr) CSA FT4
- ICEA T-29-520 (210,000 BTU/hr)
- ICEA T-30-520 (70,000 BTU/hr)

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP method
- OSHA Acceptable

Packaging:
- Material cut to length and shipped on non-returnable wood reels, while lengths in excess of 10,000 lbs. are provided on returnable steel reels that require a deposit. Extra charges apply for cuts less than 1000 ft., lagging, pulling eyes, paralleling and plexing

CATALOG NUMBER	NO. OF COND.	COND. SIZE (AWG/) kcmil	COND. DIA. INCHES	INSULATION DIAMETER MIN. INCHES	MIN. mm	MAX. INCHES	MAX. mm	GRND. WIRE SIZE (AWG)	NOM. DIA. (OVER) ARMOR INCHES	ARMOR mm	NOMINAL JACKET THICKNESS INCHES	THICKNESS mm	NOMINAL CABLE O.D. INCHES	O.D. mm	COPPER WEIGHT LBS/ 1000 FT	LBS/ 1000 FT	NET WEIGHT W/AL ARMOR kg/ km	kg/ km
2 AWG - 1000 kcmil - THREE CONDUCTOR - W/JACKET OVER ARMOR, 15 kV, 133% INS. LEVEL, 220 MILS INS. (5.59 mm)																		
17476.530200	3	2	0.27	0.71	18.0	0.80	20.3	6	2.08	52.8	0.060	1.52	2.21	56.1	919	1368	2416	3597
17476.535100*	3	1/0	0.34	0.78	19.8	0.87	22.0	4	2.22	56.5	0.060	1.52	2.35	59.8	1352	2013	2997	4463
17476.535200	3	2/0	0.38	0.82	20.8	0.91	24.3	4	2.31	58.7	0.060	1.52	2.44	62.0	1620	2412	3371	5019
17476.535400	3	4/0	0.48	0.92	23.4	1.01	25.6	3	2.53	64.3	0.075	1.91	2.70	68.5	2114	3594	4502	6703
17476.536000*	3	250	0.53	0.97	24.6	1.06	26.9	3	2.65	67.2	0.075	1.91	2.81	71.3	2789	4153	5005	7452
17476.536200	3	350	0.62	1.07	27.2	1.16	29.4	2	2.85	72.4	0.075	1.91	3.01	76.6	3790	5643	6252	9309
17476.536500	3	500	0.74	1.19	30.2	1.28	32.4	1	3.11	79.0	0.085	2.16	3.30	83.7	5276	7856	8091	12047
17476.537000*	3	750	0.91	1.37	34.8	1.46	37.1	1/0	3.50	89.0	0.085	2.16	3.69	93.6	7738	11522	11086	16507
17476.537500*	3	1000	1.06	1.52	38.6	1.61	40.9	1/0	3.83	97.3	0.085	2.16	4.01	101.9	10111	15055	13870	20652

Dimensions and weights are nominal; subject to industry tolerances.
*Non-stock item; minimum runs apply. Please consult Customer Service for price and delivery.

General Cable
Phone: 888-593-3355
www.generalcable.com

UL® LISTED