
Duralox®

XLPE/AIA/PVC, Power, Armored
600 V, UL Type MC, Three and Four Conductor (8 AWG—4/0 AWG)

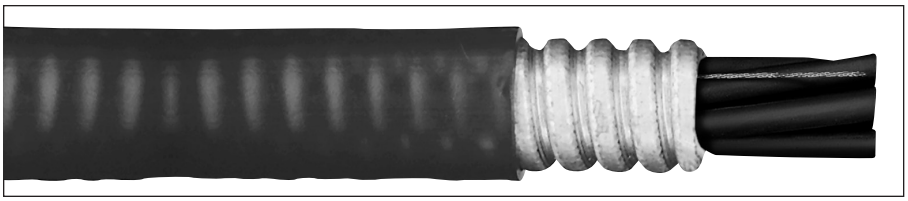

Product Construction:

Conductors:
- 8 AWG thru 4/0 AWG bare compressed copper
- Class B stranding per ASTM B8

Insulation:
- Cross-linked Polyethylene (XLPE)
- Color-coded per ICEA Method 3, Table E-2

Ground:
- Annealed bare copper Class B stranding per ASTM B8

Armor:
- Aluminum Interlocked Armor (AIA)

Jacket:
- Flame-retardant, moisture- and sunlight-resistant Polyvinyl Chloride (PVC), black

Print:
- GENERAL CABLE® SIZE (AWG OR KCMIL) 3/C OR 4/C (AS APPLICABLE) TYPE MC XHHW-2 CDRS 1/C SIZE AWG GRD SUN RES FOR CT USE DIR BUR 600 V (UL) MONTH/YEAR SEQUENTIAL FOOTAGE MARK

Options:
- Other constructions available upon request

Applications:
- Ideally suited for use in a broad range of commercial, industrial and utility applications, where maximum performance is demanded, ease of installation desired and fire resistance is critical
- Permitted for use in Class I; Class II, Division 2; and Class III, Division 1 and 2 hazardous locations per the NEC
- Installed in both exposed or concealed work, wet or dry locations, indoors or outdoors and cable trays

Features:
- Rated at 90˚C wet or dry
- Provides excellent oil and chemical resistance
- Excellent crush resistance
- Provides a long service life
- Cost-effective alternative to installations in conduit
- Meets cold bend test at -25˚C

Compliances:
Industry Compliances:
- UL 1569
- UL 44
- ICEA S-95-658/NEMA WC70
- UL Type MC-600 volts, UL File # E69797
- NEC Type XHHW-2 conductors

Flame Test Compliances:
- IEEE 383 (70,000 BTU/hr)
- UL 1581 (70,000 BTU/hr)
- IEEE 1202 (70,000 BTU/hr) CSA FT4
- ICEA T-29-520 (210,000 BTU/hr)

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP method
- OSHA Acceptable

Packaging:
- For U.S. customers, material cut to length and shipped on non-returnable wood reels, while lengths in excess of 10,000 lbs. are provided on returnable steel reels that require a deposit. Extra charges apply for cuts less than 1000 ft., lagging, pulling eyes, paralleling and plexing

CATALOG NUMBER	NO. OF COND.	COND. SIZE (AWG)	GRND. WIRE SIZE (AWG)	MINIMUM INSULATION THICKNESS		NOM. DIA. (OVER) ARMOR		NOMINAL JACKET THICKNESS		NOMINAL CABLE O.D.		COPPER WEIGHT		NET WEIGHT	
				INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	LBS/1000 FT	kg/km	LBS/1000 FT	kg/km
8 AWG - 4/0 AWG - THREE AND FOUR CONDUCTOR - 600 V															
346630	3	8	10	0.045	1.14	0.74	18.8	0.050	1.27	0.84	21.4	189	281	420	625
346640*	4	8	10	0.045	1.14	0.80	20.3	0.050	1.27	0.90	22.9	241	359	507	755
11298.030600	3	6	8	0.045	1.14	0.84	21.4	0.050	1.27	0.95	24.2	300	446	567	844
11298.040600*	4	6	8	0.045	1.14	0.91	23.1	0.050	1.27	1.01	25.6	383	570	670	997
11298.030400	3	4	8	0.045	1.14	0.94	23.9	0.050	1.27	1.05	26.7	447	665	757	1127
11298.040400*	4	4	8	0.045	1.14	1.03	26.2	0.050	1.27	1.13	28.7	577	859	912	1357
11298.030200	3	2	6	0.045	1.14	1.07	27.2	0.050	1.27	1.18	30.0	710	1057	1075	1600
11298.040200*	4	2	6	0.045	1.14	1.18	30.0	0.050	1.27	1.28	32.5	919	1368	1295	1927
11298.030100*	3	1	6	0.055	1.40	1.19	30.3	0.050	1.27	1.29	32.8	873	1299	1269	1889
11298.040100*	4	1	6	0.055	1.40	1.31	33.3	0.050	1.27	1.41	35.9	1136	1691	1596	2375
11298.035100	3	1/0	6	0.055	1.40	1.27	32.3	0.050	1.27	1.38	35.1	1081	1609	1528	2274
11298.045100*	4	1/0	6	0.055	1.40	1.40	35.6	0.050	1.27	1.50	38.1	1512	2250	1913	2847
11298.035200	3	2/0	6	0.055	1.40	1.37	34.8	0.050	1.27	1.48	37.6	1341	1996	1860	2768
11298.045200*	4	2/0	6	0.055	1.40	1.51	38.2	0.050	1.27	1.61	40.9	1760	2619	2345	3490
11298.035300	3	3/0	4	0.055	1.40	1.48	37.6	0.050	1.27	1.59	40.4	1717	2555	2259	3362
11298.045300*	4	3/0	4	0.055	1.40	1.66	42.2	0.050	1.27	1.78	45.3	2245	3341	2878	4283
11298.035400	3	4/0	4	0.055	1.40	1.66	42.2	0.060	1.52	1.79	45.5	2130	3170	2840	4226
11298.045400*	4	4/0	4	0.055	1.40	1.78	45.2	0.060	1.52	1.90	48.3	2796	4161	3586	5336

Dimensions and weights are nominal; subject to industry tolerances.
*Non-stock item; minimum runs apply. Please consult Customer Service for price and delivery.

UL® LISTED

General Cable
Phone: 888-593-3355
www.generalcable.com