Duralox®

XLPE/AIA/PVC, Power, Armored
600 V, UL Type MC, Three and Four Conductor (250 kcmil—1000 kcmil)

Product Construction:

Conductors:
- 250 kcmil thru 1000 kcmil bare compressed copper
- Class B stranding per ASTM B8

Insulation:
- Cross-linked Polyethylene (XLPE)
- Color-coded per ICEA Method 3, Table E-2


Ground:
- Annealed bare copper Class B stranding per ASTM B8

Armor:
- Aluminum Interlocked Armor (AIA)

Jacket:
- Flame-retardant, moisture- and sunlight-resistant Polyvinyl Chloride (PVC), black

Print:
- GENERAL CABLE® SIZE (AWG OR KCMIL) 3/C OR 4/C (AS APPLICABLE) TYPE MC XHHW-2 CDRS 1/C SIZE AWG GRD SUN RES FOR CT USE DIR BUR 600 V (UL) MONTH/YEAR SEQUENTIAL FOOTAGE MARK

Options:
- Other constructions available upon request

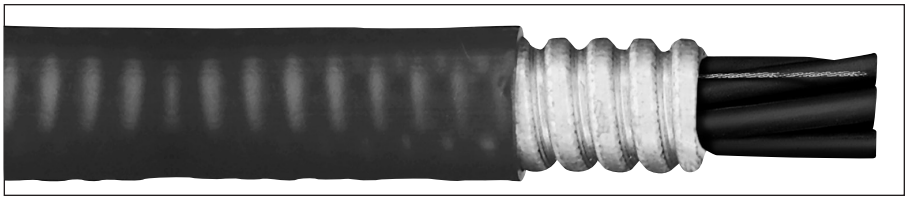

Applications:
- Ideally suited for use in a broad range of commercial, industrial and utility applications, where maximum performance is demanded, ease of installation desired and fire resistance is critical
- Permitted for use in Class I; Class II, Division 2; and Class III, Division 1 and 2 hazardous locations per the NEC
- Installed in both exposed or concealed work, wet or dry locations, indoors or outdoors and cable trays

Features:
- Rated at 90˚C wet or dry
- Provides excellent oil and chemical resistance
- Excellent crush resistance
- Provides a long service life
- Cost-effective alternative to installations in conduit
- Meets cold bend test at -25˚C

Compliances:
Industry Compliances:
- UL 1569
- UL 44
- ICEA S-95-658/NEMA WC70
- UL Type MC-600 volts, UL File # E90496
- NEC Type XHHW-2 conductors

Flame Test Compliances:
- IEEE 383 (70,000 BTU/hr)
- UL 1581 (70,000 BTU/hr)
- IEEE 1202 (70,000 BTU/hr) CSA FT4
- ICEA T-29-520 (210,000 BTU/hr)

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP method
- OSHA Acceptable

Packaging:
- For U.S. customers, material cut to length and shipped on non-returnable wood reels, while lengths in excess of 10,000 lbs. are provided on returnable steel reels that require a deposit. Extra charges apply for cuts less than 1000 ft., lagging, pulling eyes, paralleling and plexing

CATALOG NUMBER	NO. OF COND.	COND. SIZE (AWG)	GRND. WIRE SIZE (AWG)	MINIMUM INSULATION THICKNESS		NOM. DIA. (OVER) ARMOR		NOMINAL JACKET THICKNESS		NOMINAL CABLE O.D.		COPPER WEIGHT		NET WEIGHT	
				INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	LBS/1000 FT	kg/km	LBS/1000 FT	kg/km
250 kcmil - 1000 kcmil - THREE AND FOUR CONDUCTOR - 600 V															
11298.036000	3	250	4	0.065	1.65	1.81	46.0	0.060	1.52	1.94	49.3	2495	3713	3295	4903
11298.046000*	4	250	4	0.065	1.65	1.95	49.5	0.060	1.52	2.07	52.6	3282	4884	4174	6211
11298.036200	3	350	3	0.065	1.65	2.03	51.6	0.060	1.52	2.16	54.9	3474	5170	4400	6548
11298.046200*	4	350	3	0.065	1.65	2.20	55.9	0.060	1.52	2.32	59.0	4576	6810	5608	8345
11298.036500	3	500	2	0.065	1.65	2.30	58.5	0.075	1.91	2.46	62.5	4934	7343	6126	9116
11298.046500*	4	500	2	0.065	1.65	2.51	63.8	0.075	1.91	2.66	67.6	6509	9687	7825	11644
11298.037000*	3	750	1	0.080	2.03	2.74	69.6	0.075	1.91	2.89	73.4	7351	10940	8806	13104
11298.047000*	4	750	1	0.080	2.03	3.04	77.2	0.075	1.91	3.21	81.6	9713	14455	11494	17104
11298.037500*	3	1000	1/0	0.080	2.03	3.07	78.0	0.075	1.91	3.24	82.3	9783	14559	11476	17077
11298.047500*	4	1000	1/0	0.080	2.03	3.41	86.6	0.075	1.91	3.58	91.0	12932	19245	14931	22218

Dimensions and weights are nominal; subject to industry tolerances.
*Non-stock item; minimum runs apply. Please consult Customer Service for price and delivery.

General Cable
Phone: 888-593-3355
www.generalcable.com

UL LISTED