

6 Shielded Pairs 12AWG FREP 600V

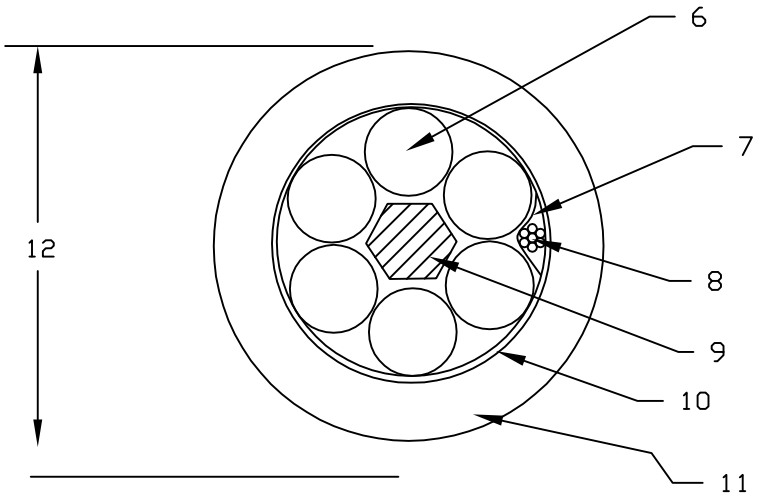

TYPICAL SHIELDED PAIR (SP)



1) CONDUCTOR: 12 AWG (7/.0305) CLASS B TINNED COPPER PER ASTM B3, B33
2) INSULATION: .030" FLAME RETARDANT ETHYLENE PROPYLENE RUBBER (FR-EPR)
3) 22 AWG (7/30) TINNED COPPER INDIVIDUAL PAIR DRAIN WIRE
4) INDIVIDUAL PAIR ALUMINUM/POLYESTER SHIELD TAPE
5) INDIVIDUAL POLYESTER SEPARATOR TAPE
6) ONE OF THE REQUIRED SIX (6SP) SHIELDED PAIRS
7) OVERALL POLYESTER BINDER TAPE
8) 22 AWG (7/30) TINNED COPPER OVERALL CABLE DRAIN WIRE
9) POLYPROPYLENE FILLER (AS NECESSARY TO FORM ROUND CABLE)
10) OVERALL ALUMINUM/POLYESTER SHIELD TAPE
11) JACKET: .080" BLACK THERMOPLASTIC CHLORINATED POLYETHYLENE (CPE)
12) OVERALL CABLE DIAMETER: 1.042" NOMINAL
13) NOMINAL CABLE WGT: 538 LBS/1000 FT
14) COLOR CODE: ONE CONDUCTOR BLACK & ONE CONDUCTOR WHITE WITH PRINTED PAIR NUMBER
15) JACKET PRINT: GENERAL CABLE(R) (WC) FREP 6SPS 12 AWG EPR/CPE SHIELDED
UL TYPE TC 90C WET OR DRY 600V DIR BUR SUN RES
DAY/MONTH/YEAR OF MANUFACTURE PLUS SEQUENTIAL FOOTAGE MARK

REVISIONS

1	11/28/12	Added part number
0	3/16/12	FIRST ISSUE

General Cable
The Power of ONE
1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-2814

REFERENCES

GENERAL CABLE PART NUMBER: 417420

DRAWN BY: A. ZAIDI | APPROVED BY:

THIS DRAWING IS THE PROPERTY OF GENERAL CABLE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GENERAL CABLE