
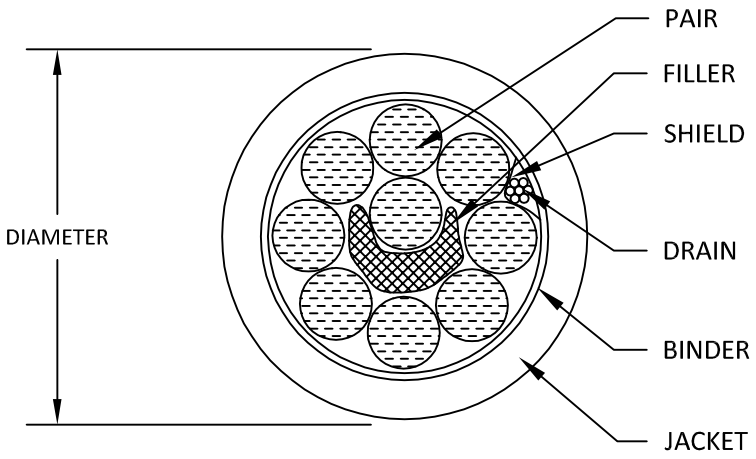


TYPICAL SHIELDED PAIR (SP)

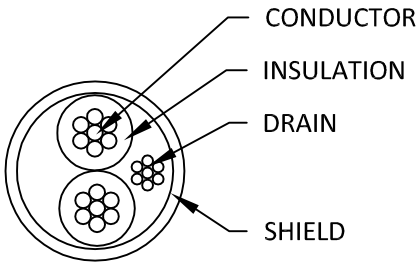

CONDUCTOR: 16AWG 7/.0192 Class B Tinned Copper Conductor per ASTM B33 & B8.

INSULATION: 0.025" Flame Retardant Ethylene Propylene Rubber (EPR).

PAIR: Two Insulated Conductors Twisted Together with a Drain Wire.

FILLER: As necessary for roundness.

ASSEMBLY: Nine (9) shielded twisted pairs cabled together with an overall drain and shield.

TAPE SHIELD: Aluminum/Mylar Tape applied with 25% lap

DRAIN: 22AWG 7/w Tinned Copper Drain Wire.

JACKET: 0.080" Black Flame Retardant Chlorinated Polyethylene (CPE).

CABLE DIAMETER: 0.930" Nom.

CABLE WEIGHT: 404 lbs/1000ft Nominal.

PRINT: GENERAL CABLE® (WC) FREP 9SPS 16AWG COPPER EPR/CPE SHIELDED
(UL) TYPE TC 90C WET OR DRY 600V DIR BUR SUN RES MONTH/YEAR
OF MANUFACTURE PLUS SEQUENTIAL FOOTAGE

Weights and dimensions are subject to standard manufacturing tolerances.

REVISIONS

0	9/30/13	FIRST ISSUE	

General Cable | Dore Company Connecting the World

1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-3515

REFERENCES

GENERAL CABLE PART NUMBER: 421550

FREP-S600TC-16-9SPS-E1

DRAWN BY: A. ZAIDI

APPROVED BY:

The text, graphics, charts, data and any other information set forth in this document is the confidential, proprietary and/or commercially-sensitive intellectual property of General Cable Corporation and its subsidiaries. Such information may not be copied, reproduced, publicly displayed or disclosed to third parties without the prior written consent of an officer of General Cable Corporation. ® General Cable Corp. 2012