GenFree® LSZH

XLPE, Low-Smoke, Zero-Halogen (LSZH), Low-Voltage Power, Unshielded 600 V, Type RHH/RHW-LS/USE, CSA AWM I A/B, Class B

Product Construction:

Conductor:
- 14 AWG thru 750 kcmil bare compressed copper per ASTM B3. Class B stranding per ASTM B8


Composite Insulation/Jacket:
- Flame-retardant, oil-resistant, limited smoke Cross-linked Polyethylene (XLPE), black

Print:
- GENERAL CABLE® GENFREE® LSZH (PLANT OF MFG) (UL) TYPE USE OR RHH OR RHW-ST1 VW-1 (SIZE) 600 V OIL RES I SUN RES FOR CT USE*/CSA AWM I A/B 105˚C 600 V FT4 MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

* Sizes smaller than 1/0 AWG do not include "FOR CT USE"

Options:
- Available in blue, green, red and gray
- Tinned copper conductors

Applications:
- General purpose 600 V Power Cable Applications
- RHH/RHW ratings for installation in conduit or raceway
- USE rating for direct burial applications
- CT rated for installation in Cable Tray – 1/0 AWG and larger
- For use in all closed environments or populated spaces such as auditoriums, arenas and health facilities where more stringent specifications for smoke and toxicity emission levels are desired

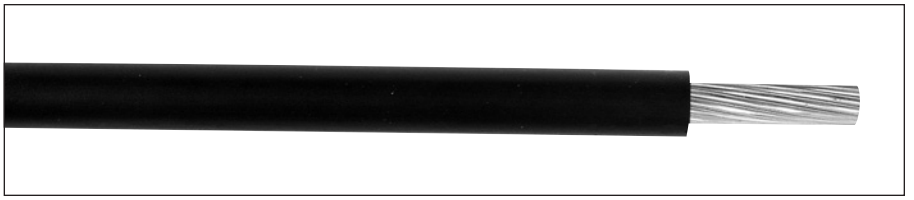

Applications (cont'd.):
- Ideally suited for use in a broad range of commercial and Industrial applications where reliability is the major concern, where maximum performance is demanded and where space is limited

Features:
- UL Type RHH/RHW/USE Rated at 90˚C dry, 75˚C wet, UL File # E90494 and E90499
- CSA AWM I A/B Rated at 105˚C
- UL AWM styles 3237 and 3578
- Smooth surface for reduced coefficient of friction for ease of installation
- Excellent moisture resistance
- Excellent resistance to salt water
- Available in colors for ease of phase identification
- Minimum acid gas emissions under combustion
- Meets cold bend test at -40˚C
- Meets UL Oil Res. I and II

Compliances:
- UL 44 Standard for Rubber Insulated Wire
- UL 758 Standard for Appliance Wiring Material
- UL 854 Standard for Service Entrance Cable
- UL 1685 Standard for Vertical Tray Fire Propagation and Smoke Release Test for Electrical and Optical Fiber Cables
- Telcordia GR347 Core
- UL Listed VW-1
- ICEA S-95-658/NEMA WC70
- ICEA T-33-655
- IEEE 1202 (70,000 BTU/hr)
- IEEE 383 (70,000 BTU/hr)
- Sizes 1/0 AWG and larger are listed "FOR CT USE"
- CSA FT4
- CSA Standard C22.2 No. 0.3
- CSA Standard C22.2 No. 210.2
- EPA 40 CFR, Part 261 for leachable lead content per TCLP method
- OSHA Acceptable

Packaging:
- Material cut to length and shipped on non-returnable wood reels

CATALOG NUMBER	COND. SIZE (AWG/ kcmil)	COND. STRAND (CLASS B)	NOMINAL COND. DIAMETER		MINIMUM AVG. INSULATION THICKNESS		NOMINAL CABLE O.D.		COPPER WEIGHT		NET WEIGHT	
			INCHES	mm	INCHES	mm	INCHES	mm	LBS/ 1000 FT	kg/km	LBS/ 1000 FT	kg/km
14 AWG - 750 kcmil CONDUCTORS, CLASS B												
14311.011400	14	7/.0242	0.07	1.78	0.045	1.14	0.17	4.32	13	19	18	27
14311.011200	12	7/.0305	0.09	2.29	0.045	1.14	0.19	4.83	20	30	25	37
14311.011000	10	7/.0385	0.12	3.05	0.045	1.14	0.22	5.59	32	48	38	57
14311.010800	8	7/.0486	0.15	3.81	0.060	1.52	0.28	7.11	50	75	58	86
14311.010600	6	7/.0612	0.18	4.57	0.060	1.52	0.31	7.87	81	121	116	173
14311.010400	4	7/.0772	0.23	5.84	0.060	1.52	0.36	9.14	129	192	171	254
14311.010200	2	7/.0974	0.28	7.11	0.060	1.52	0.42	10.67	205	305	257	382
14311.010100	1	19/.0644	0.32	8.13	0.080	2.03	0.49	12.45	258	385	331	493
14311.015100	1/0	19/.0745	0.36	9.14	0.080	2.03	0.53	13.46	326	485	406	604
14311.015200	2/0	19/.0837	0.41	10.41	0.080	2.03	0.58	14.73	411	612	495	737
14311.015300	3/0	19/.0940	0.46	11.68	0.080	2.03	0.63	16.00	518	771	612	911
14311.015400	4/0	19/.1055	0.51	12.95	0.080	2.03	0.68	17.27	653	972	757	1126
14311.016000	250	37/.0822	0.56	14.22	0.095	2.41	0.76	19.30	772	1149	905	1347
14311.016200	350	37/.0973	0.66	16.76	0.095	2.41	0.87	22.10	1081	1609	1237	1841
14311.016500	500	37/.1162	0.79	20.07	0.095	2.41	1.00	25.40	1544	2298	1728	2571
14311.017000	750	61/.1109	0.97	24.64	0.110	2.79	1.21	30.73	2316	3447	2572	3827

Dimensions and weights are nominal; subject to industry tolerances.

General Cable
Phone: 888-593-3355
www.generalcable.com

Canadian Standard Association

UL LISTED