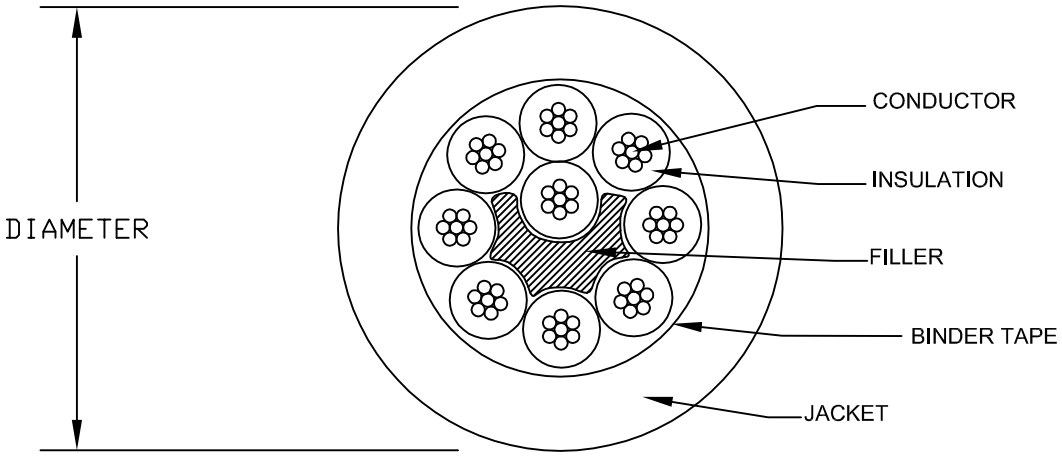


CONDUCTOR:	#16AWG (7/w) Tinned Copper Class B Strand per ASTM B8, B33
INSULATION:	0.030" Min. Avg. Wall, Flame-Retardant Ethylene Propylene Rubber (FR-EPR)
FILLER:	Polypropylene Filler, as Required to Maintain a Circular Cross-Section
CABLE:	Nine (9) Insulated Conductors and Filler Cabled Together with a Left Hand Lay and Wrapped with a Polyester Binder Tape
JACKET:	0.060" Min. Avg. Wall, Flame-Retardant Chlorinated Polyethylene (CPE), Black
PRINT LEGEND:	GENERAL CABLE® (WC) FREP 9/C 16AWG EPR/CPE (UL) TYPE TC-ER 90C WET OR DRY 600V DIR BUR SUN RES DAY/MONTH/YEAR SEQUENTIAL FOOTAGE MARK
DIAMETER:	0.565" Nominal
WEIGHT:	187 lbs/M' Nominal
COLOR CODE:	Method 1, Table E-2

* Dimensions are nominal and are subject to standard manufacturing tolerances

REVISIONS

0	08/04/10	FIRST ISSUE

REFERENCES

FREP-S600TC-16-9 600V E2

GCC P/N: 332330, SPEC 4300

General Cable | Dre Company Connecting the World

1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-3422

DRAWN BY: K. DOUT

APPROVED BY: E. ABERBACH

THE TEXT, GRAPHICS, CHARTS, DATA AND ANY OTHER INFORMATION SET FORTH IN THIS DOCUMENT IS THE CONFIDENTIAL, PROPRIETARY AND/OR COMMERCIALLY-SENSITIVE INTELLECTUAL PROPERTY OF GENERAL CABLE CORPORATION AND ITS SUBSIDIARIES. SUCH INFORMATION MAY NOT BE COPIED, REPRODUCED, PUBLICLY DISPLAYED OR DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF AN OFFICER OF GENERAL CABLE CORPORATION. © GENERAL CABLE TECHNOLOGIES CORP. 2010