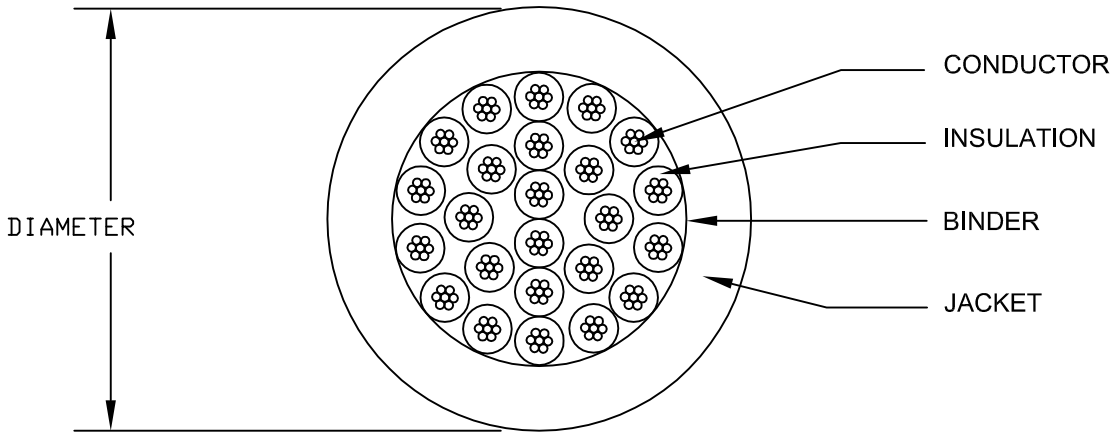


CONDUCTOR:	#16AWG (7/.0192) Tin Copper Class B Strand per ASTM B33, B8
INSULATION:	0.025" Flame-Retardant Ethylene Propylene Rubber (EPR)
CABLE:	Twenty-four (24) Insulated Conductors Cabled Together with a Left Hand Lay
BINDER:	Polyester Tape
JACKET:	0.060" Wall, Chlorinated Polyethylene (CPE), Black
PRINT LEGEND:	GENERAL CABLE® (WC) FREP 24C 16AWG EPR/CPE (UL) TYPE TC-ER 90C WET OR DRY 600V DIR BUR SUN RES DAY/MONTH/YEAR PLUS SEQUENTIAL FOOTAGE MARK
DIAMETER:	0.790" Nominal
WEIGHT:	386 lbs/M' Nominal
COLOR CODE:	Method E2 Color Code

* Dimensions are nominal and are subject to standard manufacturing tolerances

REVISIONS

0	07/16/13	FIRST ISSUE

REFERENCES

16/24C FREP(EPR/CPE) 600V E2

GCC P/N: 421190, SPEC 4300

General Cable

The Power of ONE

1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-3420

DRAWN BY: K. DOUT

APPROVED BY: E. ABERBACH

THIS DRAWING IS THE PROPERTY OF GENERAL CABLE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF THE GENERAL CABLE CO