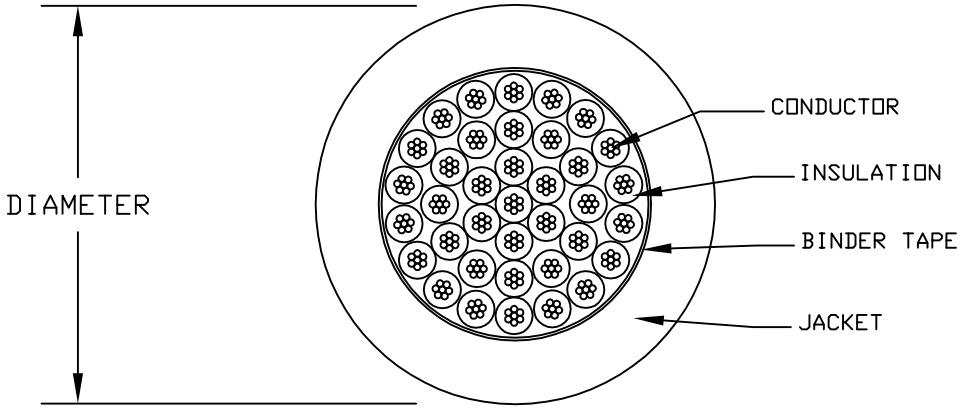


COMPONENT I -	CONDUCTOR: #16AWG (7/.0192) Bare Copper per ASTM B3, B8 INSULATION: 0 .025" Flame-Retardant Ethylene Propylene Rubber (EPR)
CABLE -	Thirty-seven (37) Component I Items Cabled With a Left Hand Lay and Polyester Binder Tape
JACKET -	0.080" Wall, Chlorinated Polyethylene (CPE), Black
JACKET PRINT -	"GENERAL CABLE® (WC) FREP 37/C 16AWG EPR/CPE (UL) TYPE TC-ER 90C WET OR DRY 600V DIR BUR SUN RES DAY/MONTH/YEAR PLUS SEQUENTIAL FOOTAGE MARK"
DIAMETER -	0.945" Nominal
NET CABLE WGT -	596 LBS/1000' Nominal
COLOR CODE -	ICEA Method E2 Color Code

* Dimensions are nominal and are subject to standard manufacturing tolerances

REVISIONS

0	07/16/13	FIRST ISSUE

REFERENCES

16/37C FREP (EPR/CPE) 600V E2
GCC P/N 412230, SPEC 4300

General Cable
The Power of ONE
1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-3421

DRAWN BY: K. DOUT | APPROVED BY: E. ABERBACH

THIS DRAWING IS THE PROPERTY OF General Cable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF THE General Cable CO