
SPEC 5840
April, 2011

SunGen® XLPE, Photovoltaic Wire 600 V, UL Type PV/USE-2 or 2000 V RHH or RHW-2 or c(UL) RWU90, 1 kV, 90°C



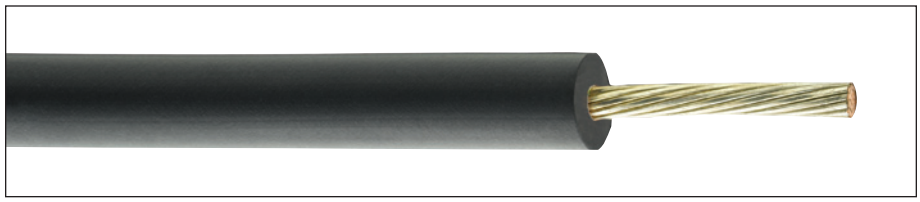

Product Construction:

Conductor:
- 18 AWG thru 2 AWG tinned coated compressed copper. Class C stranding per ASTM B33 and B8
- 1 AWG thru 1000 kcmil tinned coated compressed copper. Class B stranding per ASTM B33 and B8

Insulation:
- Flame-retardant Cross-Linked Polyethylene (XLPE), black

Print
- 18 AWG and 16 AWG: GENERAL CABLE® (PLANT OF MFG) SUNGEN® 600 V PV WIRE 90˚C WET OR DRY SUN RES (UL) -40˚C VW-1 MONTH/ YEAR OF MFG SEQUENTIAL FOOTAGE MARK
- 14 AWG thru 1000 kcmil: GENERAL CABLE® (PLANT OF MFG) SUNGEN® 600 V PV WIRE OR USE-2 OR 2000 V RHH OR RHW-2 (SIZE) 90˚ WET OR DRY SUN RES (UL) -40˚C VW-1 c(UL) RWU90 1000 V DIR BUR MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

Options:
- Bare copper conductor
- Other stranding options are available upon request
- Colors available on request

Applications:
- Single conductor, sunlight-resistant, photovoltaic wire rated 90°C wet or dry, 600 V for interconnection wiring of grounded and ungrounded photovoltaic power systems as described in Section 690.31(A) and other applicable parts of the National Electrical Code (NEC), NFPA 70

Features:
- Rated 90°C wet and dry
- Deformation-resistant at high temperatures
- Excellent moisture resistance, exceeds UL 44
- Stable electrical properties over a broad temperature range
- Excellent resistance to crush and compression cuts

Features (cont'd.):
- Resistant to most oils and chemicals
- UV/sunlight-resistant
- Meets cold bend test at -40°C

Compliances:
Industry Compliances:
- UL 4703 Type PV, UL File # E323451
- National Electrical Code (NEC)
- ICEA S-95-658/NEMA WC70
- UL 44 Type RHH or RHW-2, UL File # E90494
- UL 854 Type USE-2, UL File # E90499
- c(UL) RWU90 1 kV, UL File # E90494

Flame Test Compliances:
- UL 1581 VW-1
- For sizes 1/0 and larger: IEEE 383, IEEE 1202/CSA FT4

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP
- OSHA Acceptable

Packaging:
- Material cut to length and shipped on non-returnable wood reels

CATALOG NUMBER	COND. SIZE (AWG/ kcmil)	COND. STRAND	NOMINAL COND. O.D.		MINIMUM AVG. INSULATION THICKNESS		NOMINAL CABLE DIAMETER		COPPER WEIGHT		NET WEIGHT	
			INCHES	mm	INCHES	mm	INCHES	mm	LBS/ 1000 FT	kg/km	LBS/ 1000 FT	kg/km
18 AWG - 1000 kcmil CONDUCTORS												
12411.711800*	18	19/.0092	0.045	1.14	0.060	1.52	0.169	4.29	5	7	14	21
12411.711600*	16	19/.0117	0.056	1.42	0.060	1.52	0.180	4.57	8	12	18	27
12411.711400	14	19/.0142	0.070	1.78	0.060	1.52	0.194	4.93	13	19	27	40
12411.711200	12	19/.0185	0.088	2.23	0.060	1.52	0.214	5.43	20	30	36	54
12411.711100	10	19/.0234	0.112	2.84	0.060	1.52	0.238	6.04	32	48	51	76
12411.710800*	8	19/.0295	0.143	3.63	0.075	1.90	0.305	7.75	50	74	80	119
12411.710600*	6	19/.0372	0.184	4.67	0.075	1.90	0.342	8.69	81	121	115	171
12411.710400*	4	19/.0469	0.234	5.94	0.075	1.90	0.385	9.78	129	192	170	253
12411.710200*	2	19/.0526	0.296	7.52	0.075	1.90	0.453	11.50	205	305	253	376
12411.710100*	1	19/.0664	0.323	8.20	0.095	2.41	0.515	13.08	258	384	333	495
12411.715100*	1/0	19/.0740	0.370	9.40	0.095	2.41	0.563	14.30	326	485	410	610
12411.715200*	2/0	19/.0837	0.410	10.41	0.095	2.41	0.608	15.44	411	611	502	747
12411.715300*	3/0	19/.0940	0.460	11.68	0.095	2.41	0.658	16.71	518	771	620	922
12411.715400*	4/0	19/.1055	0.520	13.21	0.095	2.41	0.714	18.13	653	972	767	1141
12411.716250*	250	37/.0822	0.558	14.17	0.110	2.79	0.784	19.91	772	1149	923	1374
12411.716300*	300	37/.0900	0.611	15.52	0.110	2.79	0.837	21.26	926	1378	1090	1622
12411.716350*	350	37/.0972	0.661	16.79	0.110	2.79	0.887	22.53	1063	1582	1240	1845
12411.716400*	400	37/.1040	0.706	17.93	0.110	2.79	0.932	23.67	1235	1838	1423	2117
12411.716500*	500	37/.1159	0.789	20.04	0.110	2.79	1.015	25.78	1509	2246	1718	2557
12411.716600*	600	61/.0992	0.866	22.00	0.125	3.18	1.122	28.50	1883	2802	2136	3179
12411.716750*	750	61/.1109	0.968	24.59	0.125	3.18	1.224	31.09	2316	3447	2597	3865
12411.717000*	1000	61/.1280	1.117	28.37	0.125	3.18	1.373	34.87	3088	4595	3411	5076

Dimensions and weights are nominal; subject to industry tolerances.
* Non-stock item; minimum runs apply. Please contact Customer Service for price and delivery.

SunGen® UL LISTED c UL

General Cable
Phone: 888-593-3355
www.generalcable.com