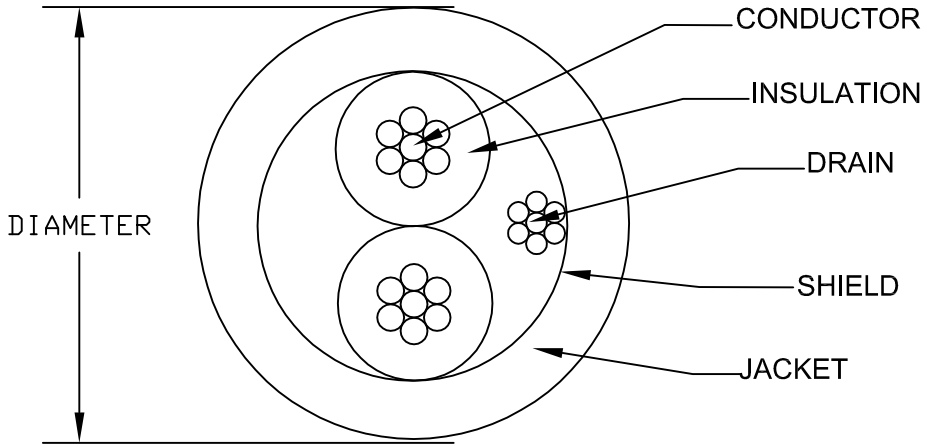


CONDUCTOR:	#18AWG (7/w) Tinned Copper Class B Strand per ASTM B8, B33
INSULATION:	0.025" Min. Avg. Wall, Flame-Retardant Ethylene Propylene Rubber (FR-EPR)
CABLE:	Two (2) Insulated Conductors Cabled Together with a Left Hand Lay
DRAIN:	#22AWG (7/w) Tinned Copper Drain Wire
SHIELD:	Aluminum/Polyester Tape Shield in Direct Contact with Drain Wire
JACKET:	0.045" Min. Avg. Wall, Flame-Retardant Chlorinated Polyethylene (CPE), Black
PRINT LEGEND:	GENERAL CABLE® (WC) FREP 2/C 18AWG EPR/CPE SHIELDED (UL) TYPE TC 90C WET OR DRY 600V DIR BUR SUN RES DAY/MONTH/YEAR SEQUENTIAL FOOTAGE MARK
DIAMETER:	0.295" Nominal
WEIGHT:	42 lbs/M' Nominal
COLOR CODE:	ICEA Method 1, Table E-2
COMPLIANCES:	UL 1277 Cold bend at -40C IEEE 1202/CSA FT4 ICEA S-73-532

REVISIONS

1	10/03/12	Added Compliances
0	11/04/10	FIRST ISSUE

REFERENCES

18/2S FREP (EPR/CPE) 600V E2

GCC P/N: 280060

General Cable | Dre Company Connecting the World

1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-2216

DRAWN BY: P. GOTTIER | APPROVED BY: E. ABERBACH

THE TEXT, GRAPHICS, CHARTS, DATA AND ANY OTHER INFORMATION SET FORTH IN THIS DOCUMENT IS THE CONFIDENTIAL, PROPRIETARY AND/OR COMMERCIALLY-SENSITIVE INTELLECTUAL PROPERTY OF GENERAL CABLE CORPORATION AND ITS SUBSIDIARIES. SUCH INFORMATION MAY NOT BE COPIED, REPRODUCED, PUBLICLY DISPLAYED OR DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF AN OFFICER OF GENERAL CABLE CORPORATION. © GENERAL CABLE TECHNOLOGIES CORP. 2010