TC-Flex™ Shielded Tray Cable 18 AWG (1,0 mm²) — 16 AWG (1,5 mm²)

UL Type WTTC 1000 V or Type TC-ER 600 V or Type MTW and c(UL) CIC/TC 600 V FT4 or CSA AWM 90°C 1000 V, Flexible, Oil Res I/II, Sunlight- and Flame-Retardant, -40°C to +90°C

Product Construction:

Conductors:
- 18 AWG (1,0 mm²) and 16 AWG (1,5 mm²) fully annealed flexible stranded bare copper with Class 5 stranding per EN 60228 (IEC 60228)

Insulation:
- Polyvinyl Chloride (PVC) insulation with a clear Polyamide (nylon) jacket per UL 83


Conductor Identification:
- Conductors are black with printed numbers and green/yellow grounding conductor

Cable Assembly:
- Conductors cabled with non-hygroscopic fillers to make cable suitably round

Shield:
- Aluminum/Mylar foil shield providing 100% coverage combined with a tinned copper braid with 85% nom. coverage

Jacket:
- Black, flexible, flame-retardant, sunlight- and oil-resistant Polyvinyl Chloride (PVC) jacket

Print:
- GENERAL CABLE® TC-FLEX™ XX/C XXAWG (XXMM²) SHIELDED (UL) TC-ER TYPE TFFN 90°C DRY 600 V SUN RES DIR BUR OIL RES I/II OR MTW OR WTTC 1000 V 90°C DRY c(UL) CIC/TC PVC/N 90°C FT4 --- CSA AWM I/II A/B 90°C 1000 V – ROHS CE – MADE IN USA DAY/ MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARKER

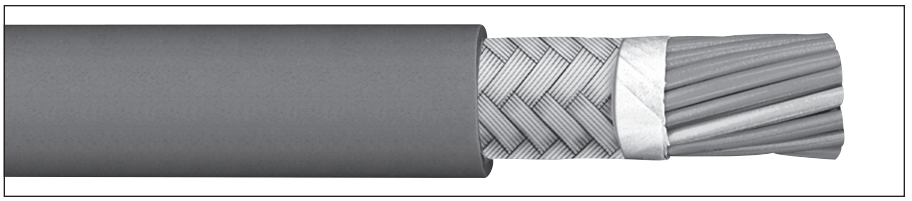

Minimum Bending Radius:
- 4x O.D. for fixed installation
- 8x O.D. for flexing applications

Applications:
- In free air, raceways or direct burial
- (UL) WTTC cables for use up to 1000 V in wind turbine generator applications in accordance with UL Subject 6140
- (UL) TC-ER cables for use up to 600 V as power and control cables in accordance with NEC® Article 336
- (UL) MTW cables for machine tool and wire up to 600 V as power and control cables in accordance with UL 1063
- (CSA) CIC/TC cables for use up to 600 V in cable trays and other applications when installed in accordance with the Canadian Electrical Code, Part I
- (CSA) AWM cables for use up to 1000 V as equipment wiring in accordance with the Canadian Electrical Code, Part I
- 4/C designs suitable for use in general purpose 600 V Variable Frequency Drive (VFD) applications[2]

Specifications:
Design Adherence:
- UL 66 & UL 83/CSA C22.2 No. 75-08 Thermoplastic Insulated Wires
- UL 1063/MTW Machine Tool Wire
- UL 1277 Power and Control Tray Cables
- UL 2277 Wind Turbine Tray Cables
- CSA C22.2 No. 230-09 Tray Cables
- CSA C22.2 No. 239-09 Control and Instrumentation Cables
- CSA C22.2 No. 210-11 Appliance Wiring Material Products

Flame Tests:
- IEEE 1202/CSA FT4

Compliances:
- Type TC-ER 90°C Dry, 75°C Wet, 600 V
- Type MTW
- Type WTTC 90°C, 1000 V
- Type CIC/TC 90°C, 600 V
- Type AWM I/II A/B, 90°C, 1000 V FT4
- RoHS Compliant

CATALOG NUMBER	NO. OF COND. INC. GRND.	NOM. INS. THICKNESS		NOM. JACKET THICKNESS		NOM. CABLE O.D.		NOM. COPPER WEIGHT		NOM. CABLE WEIGHT		90°C AMP. @ 30°C AMBIENT[1]
		INCHES	mm	INCHES	mm	INCHES	mm	LBS/1000 FT	kg/km	LBS/1000 FT	kg/km	
18 AWG (1,0 mm²) 19 Strands												
4785.03018*	3	0.021	0.53	0.048	1.22	0.334	8.5	30	44	63	93	8
4785.04018	4	0.021	0.53	0.048	1.22	0.359	9.1	41	62	79	118	8
4785.05018*	5	0.021	0.53	0.048	1.22	0.384	9.8	49	72	92	136	8
4785.07018*	7	0.021	0.53	0.048	1.22	0.430	10.9	64	95	116	173	8
4785.09018*	9	0.021	0.53	0.048	1.22	0.469	11.9	79	117	140	208	7
4785.12018*	12	0.021	0.53	0.048	1.22	0.518	13.2	100	149	174	258	7
4785.19018*	19	0.021	0.53	0.063	1.60	0.644	16.4	148	221	266	395	6
4785.25018*	25	0.021	0.53	0.063	1.60	0.718	18.2	189	281	331	492	6
4785.30018*	30	0.021	0.53	0.063	1.60	0.756	19.2	221	329	381	567	5
4785.37018*	37	0.021	0.53	0.063	1.60	0.810	20.6	268	399	453	674	5
16 AWG (1,5 mm²) 28 Strands												
4785.03016*	3	0.021	0.53	0.048	1.22	0.360	9.1	44	66	81	121	10
4785.04016	4	0.021	0.53	0.048	1.22	0.388	9.8	56	83	98	146	10
4785.05016*	5	0.021	0.53	0.048	1.22	0.417	10.6	66	99	114	170	10
4785.07016*	7	0.021	0.53	0.048	1.22	0.469	11.9	88	131	147	218	10
4785.09016*	9	0.021	0.53	0.048	1.22	0.512	13.0	109	162	178	265	9
4785.12016*	12	0.021	0.53	0.063	1.60	0.598	15.2	139	207	238	354	9
4785.19016*	19	0.021	0.53	0.063	1.60	0.707	18.0	210	312	343	510	7
4785.25016*	25	0.021	0.53	0.063	1.60	0.790	20.1	269	401	431	641	7
4785.30016*	30	0.021	0.53	0.085	2.16	0.877	22.3	318	473	533	793	6
4785.37016*	37	0.021	0.53	0.085	2.16	0.938	23.8	385	573	632	940	6

* Non-stock item; minimum runs apply. Please consult Customer Service for price and delivery.

[1] Ampacities provided are for open cable runs, in a raceway, directly buried, or as aerial cable supported on a messenger in accordance with NEC® Articles 336.80 and 392.11, Table 310.16 and are derated in accordance with NEC® 310.15.B.2.

[2] Consult manufacturer's specifications to verify applicability for installation with specific variable frequency drive.

General Cable
Phone: 888-593-3355
www.generalcable.com

RoHS Compliant Directive 2002/95/EC