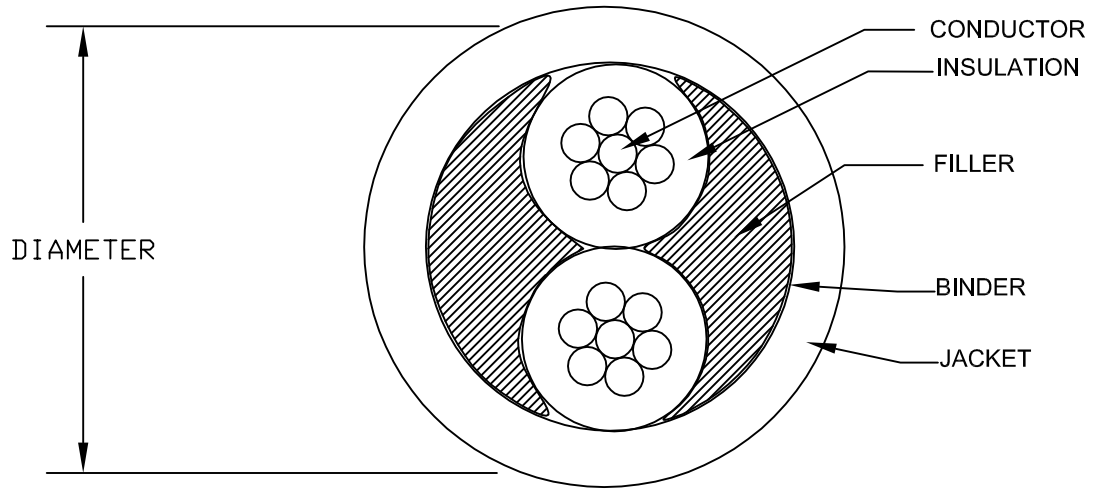


CONDUCTOR: #8AWG (7/w) Bare Copper Class B Strand per ASTM B3, B8

INSULATION - 0.030"/0.005" Wall, Flame-Retardant Polyvinyl Chloride (PVC) / Nylon, THHN/THWN Conductors

FILLER: Polypropylene Filler, as Required to Maintain a Circular Cross-Section

CABLE: Two (2) Insulated Conductors and Fillers Cabled Together with a Left Hand Lay Wrapped with a Polyester Binder Tape

JACKET: 0.060" Min. Avg. Wall, Flame-Retardant Polyvinyl Chloride (PVC), Black

PRINT LEGEND: "GENERAL CABLE® (F) VNTC 2/C 8AWG (UL) TYPE TC THHN/THWN CDRS DIR BUR SUN RES 600V ROHS" DAY/MONTH/YEAR PLUS SEQUENTIAL FOOTAGE MARK

DIAMETER: 0.575" Nominal

WEIGHT: 201 lbs/M' Nominal

COLOR CODE: Method M4 Color Code

* Dimensions are nominal and are subject to standard manufacturing tolerances

REVISIONS			
1	07/16/13	REVISED DIAMETER AND PRINT	
0	02/03/11	FIRST ISSUE	

REFERENCES
8/2 VNTC (THHN/PVC) 600V M4
GCC P/N: 231970

General Cable | Dre Company Connecting the World

1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-2250

DRAWN BY: P. GOTTIER | APPROVED BY:

The text, graphics, charts, data and any other information set forth in this document is the confidential, proprietary and/or commercially-sensitive intellectual property of General Cable Corporation and its subsidiaries. Such information may not be copied, reproduced, publicly displayed or disclosed to third parties without the prior written consent of an officer of General Cable Corporation. ®General Cable Corp. 2010