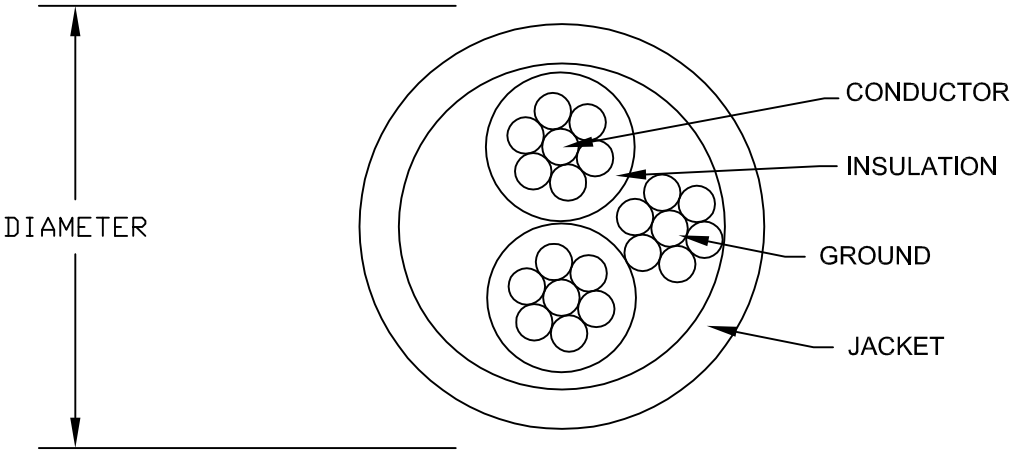


CONDUCTOR:	#14AWG (7/w) Bare Copper Class B Strand per ASTM B3, B8
INSULATION:	0.015"/0.004" Wall, Flame-Retardant Polyvinyl Chloride (PVC)/Nylon
GROUND:	#14AWG (7/w) Bare Copper Class B Strand per ASTM B3, B8
CABLE:	Two(2) Insulated + One(1) Ground Cabled Together with a Left Hand Lay
JACKET:	0.045" Min. Avg. Wall, Flame-Retardant Polyvinyl Chloride (PVC), Black
PRINT LEGEND:	"GENERAL CABLE® (WC) VNTC 2/C 14AWG WITH GRND (UL) TYPE TC-ER THHN/THWN CDRS DIR BUR SUN RES 600V ROHS" DAY/MONTH/YEAR PLUS SEQUENTIAL FOOTAGE MARK
DIAMETER:	0.320" Nominal
WEIGHT:	71 lbs/M' Nominal
COLOR CODE:	ICEA Method 1, Table E-2 plus Alpha-Numeric Printed Numbers

REVISIONS

0	07/15/13	FIRST ISSUE

REFERENCES

14/2C +14G VNTC (THHN/PVC) 600V E2

GCC P/N: 421730

General Cable | One Company Connecting the World

1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-3419

DRAWN BY: A. ZAIDI

APPROVED BY:

The text, graphics, charts, data and any other information set forth in this document is the confidential, proprietary and/or commercially-sensitive intellectual property of General Cable Corporation and its subsidiaries. Such information may not be copied, reproduced, publicly displayed or disclosed to third parties without the prior written consent of an officer of General Cable Corporation. ®General Cable Corp. 2010