# Types SJTOW and STOW

## 90ºC 300 and 600 Volt UL/CSA Portable Cord

### Product Construction:

#### Conductors:

- 18 through 12 AWG fully annealed stranded bare copper per ASTM B-174

#### Insulation:

- Premium-grade, color-coded PVC
- Color code: See chart below

#### Jacket:

- Polyvinylchloride (PVC), gray or yellow
- Temperature range: -40ºC to +90ºC
- Voltage rating:
  300 volts Type SJTOW
  600 volts Type STOW

#### Jacket Marking:

- CAROL (SIZE) ($mm^2$) 90°C UL WATER RESISTANT SJTOW (OR STOW) CSA (-40°C) FT-2 RoHS MADE IN USA 300V (or 600V)

### Applications:

- Portable tools
- Motors
- Floor maintenance equipment
- Hospital equipment
- Sound equipment
- Washing machines
- Portable lights
- Lamps and similar equipment

### Features:

- Oil- and water-resistant jacket
- Resists:
  - Oils
  - Water
  - Acids
  - Alkalies
- Ozone-sunlight (UV)- and weather-resistant
- UL Listed and CSA certified for indoor and outdoor use

### Industry Approvals:


- UL Flexible Cord - UL Subject 62
- MSHA Approved (where applicable)
- CSA
- RoHS Compliant

### Packaging:

- 250' (76.2 m), 500' (152.4 m), and 1000' (304.8 m)
- Other put-ups available on special order

### COLOR CODE CHART

| NO. OF CONDUCTORS | COLOR |
|---|---|
| 2 | Black, White |
| 3 | Black, White, Green |
| 4 | Black, White, Red, Green |

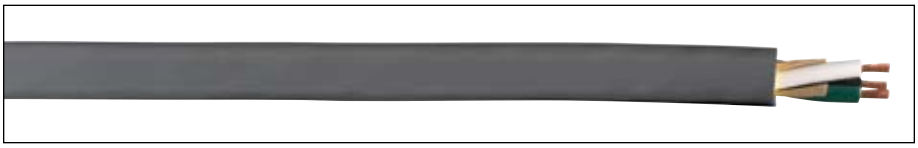

### TYPE SJTOW — 300 VOLT — UL/CSA

| CATALOG NUMBER | NO. OF COND. | AWG SIZE | COND. STRAND | NOMINAL INS. THICKNESS | | NOMINAL O.D. | | CURRENT AMPS† | APPROX. NET WEIGHT LBS/M'(S) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | INCHES | mm | INCHES | mm | | |
| **86902*** | 2 | 18 | 16/30 | 0.030 | 0.76 | 0.290 | 7.37 | 10 | 42 |
| **86903*** | 3 | 18 | 16/30 | 0.030 | 0.76 | 0.305 | 7.75 | 10 | 54 |
| **86904*** | 4 | 18 | 16/30 | 0.030 | 0.76 | 0.335 | 8.51 | 7 | 65 |
| **86912*** | 2 | 16 | 26/30 | 0.030 | 0.76 | 0.315 | 8.00 | 13 | 57 |
| **86913** | 3 | 16 | 26/30 | 0.030 | 0.76 | 0.330 | 8.38 | 13 | 70 |
| **86914*** | 4 | 16 | 26/30 | 0.030 | 0.76 | 0.365 | 9.27 | 10 | 86 |
| **86922*** | 2 | 14 | 41/30 | 0.030 | 0.76 | 0.345 | 8.76 | 18 | 67 |
| **86923** | 3 | 14 | 41/30 | 0.030 | 0.76 | 0.365 | 9.27 | 18 | 92 |
| **86924** | 4 | 14 | 41/30 | 0.030 | 0.76 | 0.415 | 10.54 | 15 | 114 |
| **86932*** | 2 | 12 | 65/30 | 0.030 | 0.76 | 0.410 | 10.44 | 25 | 95 |
| **86933** | 3 | 12 | 65/30 | 0.030 | 0.76 | 0.430 | 10.92 | 25 | 132 |
| **86934*** | 4 | 12 | 65/30 | 0.030 | 0.76 | 0.485 | 12.32 | 20 | 167 |

### TYPE STOW — 600 VOLT — UL/CSA

| CATALOG NUMBER | NO. OF COND. | AWG SIZE | COND. STRAND | NOMINAL INS. THICKNESS | | NOMINAL O.D. | | CURRENT AMPS† | APPROX. NET WEIGHT LBS/M'(S) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | INCHES | mm | INCHES | mm | | |
| **86952*** | 2 | 18 | 16/30 | 0.030 | 0.76 | 0.350 | 8.89 | 10 | 60 |
| **86953** | 3 | 18 | 16/30 | 0.030 | 0.76 | 0.365 | 9.27 | 10 | 72 |
| **86954*** | 4 | 18 | 16/30 | 0.030 | 0.76 | 0.395 | 10.03 | 7 | 85 |
| **86962*** | 2 | 16 | 26/30 | 0.030 | 0.76 | 0.375 | 9.58 | 13 | 76 |
| **86963** | 3 | 16 | 26/30 | 0.030 | 0.76 | 0.395 | 10.08 | 13 | 90 |
| **86964** | 4 | 16 | 26/30 | 0.030 | 0.76 | 0.425 | 10.80 | 10 | 107 |
| **86972*** | 2 | 14 | 41/30 | 0.045 | 1.14 | 0.505 | 12.83 | 18 | 120 |
| **86973** | 3 | 14 | 41/30 | 0.045 | 1.14 | 0.535 | 13.59 | 18 | 156 |
| **86974** | 4 | 14 | 41/30 | 0.045 | 1.14 | 0.585 | 14.86 | 15 | 184 |
| **86982*** | 2 | 12 | 65/30 | 0.045 | 1.14 | 0.585 | 14.86 | 25 | 165 |
| **86983** | 3 | 12 | 65/30 | 0.045 | 1.14 | 0.615 | 15.62 | 25 | 208 |
| **86984*** | 4 | 12 | 65/30 | 0.045 | 1.14 | 0.665 | 16.89 | 20 | 254 |

* Non-stock item; minimum quantity purchase required.
† Green conductor for grounding only. Ampacities based on NEC table 400.5(A).
(S) Actual shipping weight may vary.

General Cable

RoHS Compliant Directive 2002/95/EC

MSHA Mine Safety and Health Administration

LISTED

CAROL BRAND