
HENDRIX

Hendrix Wire and Cable Inc

HQ2000 .175" TRXLP 15 KV CONCENTRIC NEUTRAL UNDERGROUND CABLE 100% INSULATION THICKNESS COMPRESSED STRANDING AND SOLID CONDUCTORS

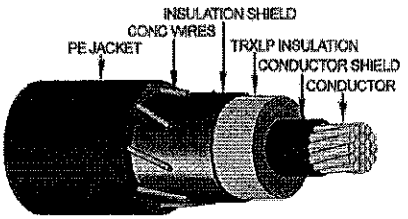

PHYSICAL DATA

ALUMINUM	CONDUCTOR		COPPER NEUTRAL		DIAMETER (PER ANSI/ICEA S-94-649-2000)				WEIGHTS			
	AWG or KCMIL	Number of Strands	Number of Wires	Size AWG	Conductor	Min. Over Insulation	Max.Over Insulation	Over Embedded Jacket	Conductor	Neutral	Total Without Jacket	Total With Embedded Jacket
FULL NEUTRAL	2	SOLID	10	14	.258	.610	.695	.978	61.1	130	356	477
	2	7	10	14	.283	.635	.720	1.003	62.3	130	370	487
	1	SOLID	13	14	.289	.645	.725	1.008	78.5	173	424	543
	1	19	13	14	.322	.675	.760	1.038	78.5	173	437	556
	1/0	SOLID	16	14	.325	.680	.760	1.043	97.2	210	494	615
	1/0	19	16	14	.362	.715	.800	1.078	99.1	210	510	632
	2/0	19	13	12	.406	.760	.845	1.157	124.9	276	616	760
	3/0	19	16	12	.456	.810	.895	1.207	157.6	340	730	874
	4/0	19	20	12	.512	.865	.950	1.262	198.6	425	875	1030
ONE-THIRD NEUTRAL												
	1/0	SOLID	6	14	.325	.680	.760	1.043	97.2	80	356	460
	1/0	19	6	14	.362	.715	.800	1.078	99.1	80	373	515
	2/0	19	7	14	.406	.760	.845	1.123	124.9	94	434	575
	3/0	19	9	14	.456	.810	.895	1.173	157.5	120	510	655
	4/0	19	11	14	.512	.865	.950	1.228	198.6	147	598	759
	250	37	13	14	.558	.920	1.005	1.288	234.7	174	684	889
	350	37	11	12	.661	1.025	1.110	1.462	328.6	238	913	1175
	500	37	16	12	.789	1.150	1.235	1.562	469.4	341	1207	1498
	750	61	15	10	.968	1.340	1.425	1.884	704.0	508	1685	2057
	1000	61	20	10	1.117	1.485	1.575	2.069	938.7	683	2210	2516

COPPER	CONDUCTOR		COPPER NEUTRAL		DIAMETER (PER ANSI/ICEA S-94-649-2000)				WEIGHTS			
	AWG or KCMIL	Number of Strands	Number of Wires	Size AWG	Conductor	Min. Over Insulation	Max.Over Insulation	Over Embedded Jacket	Conductor	Neutral	Total Without Jacket	Total With Embedded Jacket
FULL NEUTRAL	2	7	16	14	.283	.635	.720	1.003	205	232	642	700
	1	19	13	12	.322	.675	.760	1.072	259	300	504	570
	1/0	19	16	12	.362	.715	.800	1.112	326	370	923	993
	2/0	19	20	12	.406	.760	.845	1.157	411	462	1107	1176
	3/0	19	25	12	.456	.810	.895	1.207	518	578	1334	1402
	4/0	19	32	12	.512	.865	.950	1.262	653	740	1642	1708
ONE-THIRD NEUTRAL												
	1/0	19	9	14	.362	.715	.800	1.078	326	131	708	777
	2/0	19	11	14	.406	.760	.845	1.123	411	160	836	907
	3/0	19	14	14	.456	.810	.895	1.173	518	203	1002	1074
	4/0	19	11	12	.512	.865	.950	1.262	653	255	1227	1317
	250	37	13	12	.558	.920	1.005	1.322	772	301	1427	1546
	350	37	12	10	.661	1.025	1.110	1.504	1080	440	1904	2055
	500	37	17	10	.789	1.150	1.235	1.694	1544	623	2664	2823
	750	61	25	10	.968	1.340	1.425	1.884	2316	917	3794	3964
	1000	61	33	10	1.117	1.485	1.575	2.105	3088	1211	4948	5127