# Carolprene® Jacketed Type SOOW, Non-UL

## 90°C 600 Volt Portable Cord

### Product Construction:

#### Conductors:
- 8 through 2 AWG fully annealed stranded bare copper per ASTM B-174

#### Insulation:
- Premium-grade, color-coded 90°C EPDM
- Color code: See chart below

#### Jacket:
- Carolprene®, black
- Temperature range: -40°C to +90°C


#### Jacket Marking:
- CAROL (SIZE) TYPE SOOW 90°C P-7K-123033 MSHA MADE IN USA NON-UL

### Applications:
- Portable tools and equipment
- Temporary and portable power
- Motors and associated machinery

### Features:
- Excellent resistance to oil and moisture
- Good tensile strength, elongation and aging characteristics
- High flexibility
- Excellent abrasion resistance
- Sunlight-resistant

### Industry Approvals:
- MSHA Approved
- RoHS Compliant

### Packaging:
- 250' (76.2 m), 500' (152.4 m), 1000' (304.8 m)
- Other put-ups available on special order

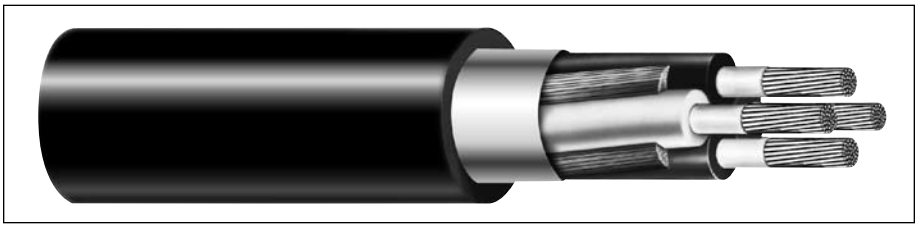

**TYPE SOOW, NON-UL – 600 VOLT**

| CATALOG NUMBER | NO. OF COND. | COND. SIZE (AWG) | COND. STRAND | NOMINAL INS. THICKNESS | | NOMINAL O.D. | | CURRENT AMPS† | APPROX. NET WT. LBS/M'(S) | STD. CTN. |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | INCHES | mm | INCHES | mm | | | |
| **01811*** | 2 | 8 | 65/26 | 0.050 | 1.27 | 0.660 | 16.76 | 40 | 283 | 250' |
| **01812** | 3 | 8 | 65/26 | 0.050 | 1.27 | 0.695 | 17.65 | 40 | 340 | 250' |
| **01827** | 4 | 8 | 65/26 | 0.050 | 1.27 | 0.760 | 19.30 | 35 | 491 | 250' |
| **98267** | 5 | 8 | 65/26 | 0.050 | 1.27 | 0.840 | 21.34 | 28 | 550 | 250' |
| **01825** | 3 | 6 | 101/26 | 0.050 | 1.27 | 0.790 | 20.07 | 55 | 531 | 250' |
| **01824** | 4 | 6 | 101/26 | 0.050 | 1.27 | 0.865 | 21.97 | 45 | 660 | 250' |
| **98270** | 5 | 6 | 101/26 | 0.050 | 1.27 | 0.945 | 24.00 | 36 | 759 | 250' |
| **01823*** | 2 | 4 | 119/25 | 0.050 | 1.27 | 0.860 | 21.84 | 70 | 580 | 250' |
| **01822** | 3 | 4 | 119/25 | 0.050 | 1.27 | 0.915 | 23.24 | 70 | 745 | 250' |
| **01821** | 4 | 4 | 119/25 | 0.050 | 1.27 | 1.000 | 25.40 | 60 | 918 | 250' |
| **98463** | 5 | 4 | 119/25 | 0.050 | 1.27 | 1.095 | 27.81 | 48 | 1030 | 250' |
| **01819** | 3 | 2 | 133/.0211 | 0.055 | 1.40 | 1.085 | 27.56 | 95 | 1072 | 250' |
| **01818** | 4 | 2 | 133/.0211 | 0.055 | 1.40 | 1.170 | 29.72 | 80 | 1344 | 250' |
| **98187** | 5 | 2 | 133/.0211 | 0.055 | 1.40 | 1.390 | 35.31 | 64 | 1702 | 250' |

* Non-stock item; minimum quantity purchase required.
† Green conductor for grounding only. Ampacities based on NEC table 400.5(A).
(S) Actual shipping weight may vary.

### COLOR CODE CHART

| NO. OF CONDUCTORS | COLOR |
|---|---|
| **2** | Black, White |
| **3** | Black, White, Green |
| **4** | Black, White, Red, Green |
| **5** | Black, White, Red, Orange, Green |

General Cable

RoHS Compliant Directive 2002/95/EC

MSHA Mine Safety and Health Administration

CAROL® BRAND