Loose Tube Single Jacket Armored Cable

Product Construction:

Fiber:
- 2–312 fibers
- Loose tube gel-filled
- Color-coding per TIA/EIA 598 B

Central Strength Member:
- Epoxy/glass rod

Armor:
- Corrugated coated steel tape

Outer Jacket:
- Black UV- and moisture-resistant polyethylene (PE)
- Sequential footage markings*

Features:
- Loose tube gel-filled construction for superior fiber protection
- UV- and moisture-resistant design
- Rodent-resistant construction
- Dry Water Block cable core for ease of handling

Performance:
- Temperature:
  Storage -40˚C (-40˚F) to +75˚C (+167˚F)
  Installation -30˚C (-22˚F) to +60˚C (+140˚F)
  Operating -40˚C (-40˚F) to +70˚C (+158˚F)
- Minimum Bend Radius:
  20 X OD—Installation
  10 X OD—In-Service
- Maximum Crush Resistance:
  Short - 125 lbs/in (220 N/cm)
  Long - 63 lbs/in (110 N/cm)


Applications:
- Interbuilding voice or data communication backbones
- Installed in ducts, underground conduits, aerial/lashed or direct buried

Compliances:
- ANSI/TIA/EIA 568 B.3
- ICEA S-87-640
- Rural Utilities Service (RUS) 7 CFR 1755.900 (REA PE-90)
- GR-20 Verified
- RoHS Compliant Directive 2002/95/EC

Options:
- Gel-free tube versions also available, use "-DT" suffix (XX0124M1F-DT)**
- Alternate 6-fiber per tube available upon request

*Sequential meter markings available upon request


**DT-Max 216 Fiber (call to request cable dimensions)

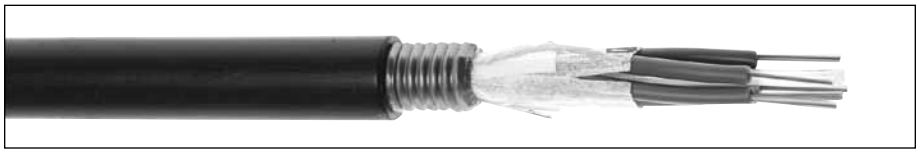

CATALOG NUMBER	FIBER COUNT	NO. OF LOOSE TUBES	NO. OF FILLERS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
								INSTALLATION		IN-SERVICE	
				IN	mm	LBS/1000'	kg/km	LBS	N	LBS	N
XX0023M1F-DWB	2	2	3	0.48	12.1	91	135	600	2670	180	800
XX0044M1F-DWB	4	1	4	0.48	12.1	91	135	600	2670	180	800
XX0064M1F-DWB	6	1	4	0.48	12.1	91	135	600	2670	180	800
XX0084M1F-DWB	8	1	4	0.48	12.1	91	135	600	2670	180	800
XX0124M1F-DWB	12	1	4	0.48	12.1	91	135	600	2670	180	800
XX0184M1F-DWB	18	2	3	0.48	12.1	91	135	600	2670	180	800
XX0244M1F-DWB	24	2	3	0.48	12.1	91	135	600	2670	180	800
XX0364M1F-DWB	36	3	2	0.48	12.1	91	135	600	2670	180	800
XX0484M1F-DWB	48	4	1	0.48	12.1	91	135	600	2670	180	800
XX0604M1F-DWB	60	5	0	0.48	12.1	91	135	600	2670	180	800
XX0724M1F-DWB	72	6	0	0.54	13.6	109	162	600	2670	180	800
XX0964M1F-DWB	96	8	0	0.60	15.3	129	191	600	2670	180	800
XX1204M1F-DWB	120	10	0	0.68	17.2	161	239	600	2670	180	800
XX1444M1F-DWB	144	12	0	0.75	19.1	193	287	600	2670	180	800
XX1924M1F-DWB	192	16	2	0.76	19.4	189	281	600	2670	180	800
XX2164M1F-DWB	216	18	0	0.76	19.4	189	281	600	2670	180	800
XX2404M1F-DWB	240	20	2	0.82	20.7	212	315	600	2670	180	800
XX2644M1F-DWB	264	22	0	0.82	20.7	212	315	600	2670	180	800
XX2884M1F-DWB	288	24	0	0.85	21.7	236	351	600	2670	180	800
XX3124M1F-DWB	312	26	0	0.91	23.0	258	384	600	2670	180	800

XX denotes glass type.
A complete listing of NextGen® Brand glass types is specified on page 3 of this catalog.

Typical Cross-Section

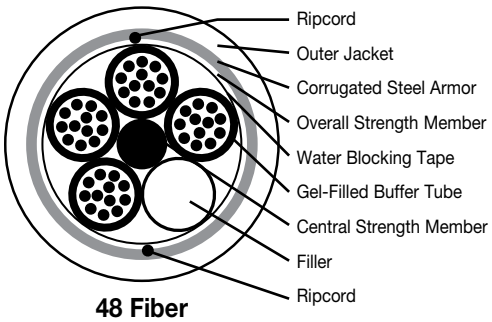

48 Fiber

Hybrid designs (containing singlemode and multimode fiber) and composite designs (containing copper conductors) are also available.

For complete listing of all fiber counts offered, please contact your General Cable sales representative.

Factory-installed eyelet option for quick cable-pull setups available.

Ordering Part Number Example

CG0124M1F-DWB

62.5 mm multimode, 12 fibers, loose tube SJ armored
Please see pages 4 and 5 for a complete guide on part number selection and ordering information.

General Cable RoHS Compliant Directive 2002/95/EC RUS Compliant TIA/EIA 568B NEXTGEN BRAND

Fiber Optic Part Number System

Example: AP0121PNU-ILPA
Singlemode, 12 Fibers, Tight Buffer Distribution Plenum, Interlock Armor Plenum Aluminum

A	P	0	1	2	1	P	N	U	ILPA
1	2	3	4	5	6	7	8	9	[SUFFIX]

Fiber Grade — Position 1, 2

In position 1
A: Singlemode (sm)
B: 50 MM Multimode (mm)
C: 62.5 MM Multimode (mm)
For position 2, reference pages 2 and 3 for fiber specifications and grades.

Requested Fiber Count — Position 3, 4, 5

Standard Offerings:
6 12 24 36 48 72

Buffer Construction — Position 6

1) Tight Buffer; 3) Single Fiber Loose Tube (Gel-filled); 4) Multi-Fiber Loose Tube (Gel-Filled); 6) Bare/Ribbon

Note: 2) Quick Strip and 5) Loose Buffer no longer available

Suffixes

- **BK** Black Jacket (UV Resistant)
- **DWB** Dry Water Block Cable Core
- **DT** Dry Tube
- **ILP** Interlock Armor Plenum Steel
- **ILPA** Interlock Armor Plenum Aluminum
- **ILPS** Interlock Armor Plenum Steel w/Sub-Units
- **ILPAS** Interlock Armor Plenum Aluminum w/Sub-Units
- **ILR** Interlock Armor Riser Steel
- **ILRA** Interlock Armor Riser Aluminum
- **ILRS** Interlock Armor Riser Steel w/Sub-Units
- **ILRAS** Interlock Armor Riser Aluminum w/Sub-Units
- **RIP** Ripcord

Series Type — Position 7, 8, 9

Outdoor:

E1S: Loose Tube TJ Dual Armor
H1A: Loose Tube DJ
H1F: Loose Tube DJ Armored
H1S: Loose Tube DJ Dual Armor
M1A: Loose Tube SJ
M1F: Loose Tube SJ Armored
M1N: Loose Tube SJ Armored Self-Supporting
M1Y: Loose Tube SJ Self-Supporting
R1A: Loose Tube SJ Ribbon cable
U1A: All-Dielectric Flat Drop Cable
U1A.TF: Toneable Flat Drop Cable
U2A: Mini (Figure-8) Drop Cable
UNFC: Compact Central Loose Tube Drop Cable
UNFS: Central Tube SJ Armored

Indoor:

B3D: Tight Buffer Breakout Plenum
B3R: Tight Buffer Breakout Riser
PNR/P1R: Tight Buffer Distribution Riser
PNU/P1D: Tight Buffer Distribution Plenum
PNZ/P1Z: Tight Buffer Distribution LSZH

Indoor/Outdoor:

ANR/A1R: Tight Buffer Distribution Riser
ANU/A1D: Tight Buffer Distribution Plenum
H1L: Loose Tube DJ Armored LSZH
H1M: Loose Tube DJ Riser – Chemical-Resistant
M1D: Loose Tube SJ Plenum
M1M: Loose Tube SJ Riser
M1Z: Loose Tube SJ LSZH
UNU: Central Tube SJ Plenum

Specialty:

GNC: Military Tactical Distribution Cable

Note: DJ = Dual Jacket
SJ = Single Jacket
TJ = Triple Jacket

Optical Fiber Code Cross-Reference

Fiber Type	General Cable	Corning® Optical Fiber	Description
Standard Loose Tube SM	AQ	SMF-28e+™ Fiber	Full spectrum, low water peak singlemode, ITU-T G.652.D
Performance Loose Tube SM	AT	SMF-28e+™ Fiber	Full spectrum, high performance low water peak singlemode with 0.35/0.25 attenuation, ITU-T G.652.D
Tight Buffer SM	AP	SMF-28e+™ Fiber	Full spectrum, low water peak singlemode with 900µm PVC buffer, ITU-T G.652.D
Long-Haul SM	AL	LEAF® Fiber	Large A_{eff}, low water peak, NZ-DSF singlemode, ITU-T G.655
Ultra-Bendable SM	AZ	ClearCurve® ZBL	Full spectrum with best macrobending performance, ITU-T G.652.D and ITU-T G.657.A
62.5 µm MM	CG	InfiniCor® 300 Fiber	1 Gb/s ≤ 300 m at 850 nm, OM1* 1 Gb/s ≤ 550 m at 1300 nm
62.5 µm MM	CL	InfiniCor® CL™ 1000 Fiber	1 Gb/s ≤ 500 m at 850 nm, OM1* 1 Gb/s ≤ 1000 m at 1300 nm
Ultra-bendable 50 µm MM	BI	ClearCurve® OM2 Fiber	10 Gb/s ≤ 150 m at 850 nm, OM2* 1 Gb/s ≤ 750 m at 850 nm
Ultra-bendable 50 µm MM	BE	ClearCurve® OM3 Fiber	10 Gb/s ≤ 300 m at 850 nm, OM3* 1 Gb/s ≤ 1000 m at 850 nm
Ultra-bendable 50 µm MM	BL	ClearCurve® OM4 Fiber	10 Gb/s ≤ 550 m at 850 nm, OM4* 1 Gb/s ≤ 1100 m at 850 nm
Ultra-bendable 50 µm MM	BM	ClearCurve® OM4 Fiber	10 Gb/s ≤ 600 m at 850 nm, OM4+* 1 Gb/s ≤ 1100 m at 850 nm

* Designation per ISO 11801 Fiber Standards

SMF-28e+ is a trademark and Corning, LEAF, InfiniCor and Plus Corning Optical Fiber are registered trademarks of Corning Incorporated, Corning, NY, U.S.A.