Tight Buffer Distribution Plenum Cable

Type OFNP, CSA FT6

Product Construction:

Fiber:
- 2–144 fibers
- 900 µm tight buffer
- Color-coding per TIA/EIA 598 B

Central Strength Member:
- Epoxy/glass rod (above 12 fibers)

Overall Strength Member:
- Aramid fiber yarn

Jacket:
- Flame-retardant polyvinyl chloride (PVC) or fluoropolymer
- Sequential footage markings*
- Orange jacket—multimode fibers (except 10 Gbps)
- Aqua jacket—10 Gbps multimode fibers
- Yellow jacket—singlemode fibers

Features:
- Lightweight, flexible design simplifies installation
- Tight buffer provides individual fiber protection
- Tight buffered fibers are easy to handle and strip for field connectorization
- Sub-units are numbered for identification


Performance:
- Temperature:
  Storage -40°C (-40°F) to +70°C (+158°F)
  Installation 0°C (+32°F) to +50°C (+122°F)
  Operating -20°C (-4°F) to +70°C (+158°F)
- Minimum Bend Radius:
  20 X OD—Installation
  10 X OD—In-Service
- Maximum Crush Resistance:
  850 lbs/in (1485 N/cm)
- Maximum Vertical Rise—1,640 ft (500 m)

Applications:
- Intrabuilding voice or data communication backbones
- ETL Listed Type OFNP for installation in ducts, plenums and other spaces used as environmental air returns when installed in accordance with NEC article 770-51 (a) and 770-53 (a)

Compliances:
- ETL Listed Type OFNP
- CSA FT6
- ANSI/TIA/EIA 568 B.3
- ICEA S-83-596
- GR-409
- RoHS Compliant Directive 2002/95/EC

Option:
- Ripcord available on PNUs, comes as standard on P1Ds


*Sequential meter markings available upon request

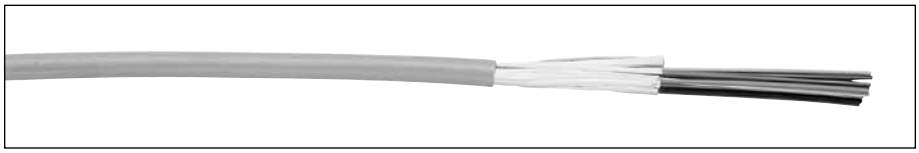


CATALOG NUMBER	FIBER COUNT	NO. OF SUB-UNITS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
							INSTALLATION		IN-SERVICE	
			IN	mm	LBS/1000'	kg/km	LBS	N	LBS	N
XX0021PNU	2	—	0.17	4	12	17	225	1000	65	290
XX0041PNU	4	—	0.18	5	14	20	225	1000	65	290
XX0061PNU	6	—	0.20	5	16	24	225	1000	65	290
XX0081PNU	8	—	0.21	5	18	27	245	1090	70	311
XX0121PNU	12	—	0.23	6	23	34	320	1423	112	500
XX0181PNU	18	—	0.31	8	42	63	320	1423	112	500
XX0241PNU	24	—	0.32	8	45	67	320	1423	112	500
XX0361P1D	36	6	0.61	16	151	225	1000	4448	335	1490
XX0481P1D	48	4	0.58	15	135	200	1000	4448	335	1490
XX0601P1D	60	5	0.67	17	186	277	1000	4448	335	1490
XX0721P1D	72	6	0.73	19	217	323	1000	4448	335	1490
XX0961P1D	96	8	0.86	22	312	464	1500	6672	500	2224
XX1201P1D	120	10	0.96	24	374	556	1500	6672	500	2224
XX1441P1D	144	12	0.96	24	394	586	1500	6672	500	2224

XX denotes glass type.
A complete listing of NextGen® Brand glass types is specified on page 3 of this catalog.

Typical Cross-Sections

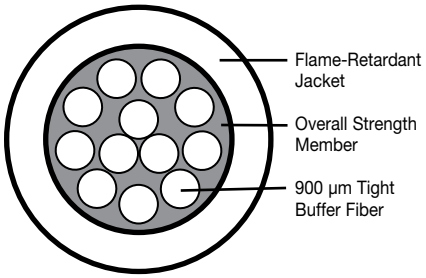

PNU ≤ 24 Fiber

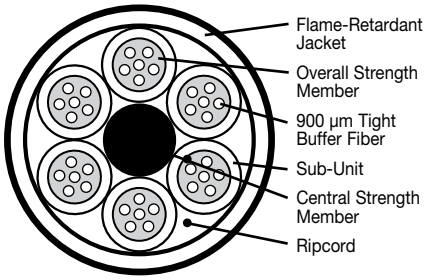

P1D ≥ 36 Fiber

Hybrid designs (containing singlemode and multimode fiber) and composite designs (containing copper conductors) are also available.

Ordering Part Number Example

CG0241PNU or CG0361P1D

62.5 mm multimode, 24 or 36 fibers, tight buffer distribution plenum
Please see pages 4 and 5 for a complete guide on part number selection and ordering information.

General Cable

RoHS Compliant Directive 2002/95/EC

TIA/EIA 568B

NEXTGEN BRAND

Fiber Optic Part Number System

Example: AP0121PNU-ILPA
Singlemode, 12 Fibers, Tight Buffer Distribution Plenum, Interlock Armor Plenum Aluminum

A	P	0	1	2	1	P	N	U	ILPA
1	2	3	4	5	6	7	8	9	[SUFFIX]

Fiber Grade — Position 1, 2

In position 1
A: Singlemode (sm)
B: 50 MM Multimode (mm)
C: 62.5 MM Multimode (mm)
For position 2, reference pages 2 and 3 for fiber specifications and grades.

Requested Fiber Count — Position 3, 4, 5

Standard Offerings:
6 12 24 36 48 72

Buffer Construction — Position 6

1) Tight Buffer; 3) Single Fiber Loose Tube (Gel-filled); 4) Multi-Fiber Loose Tube (Gel-Filled); 6) Bare/Ribbon

Note: 2) Quick Strip and 5) Loose Buffer no longer available

Suffixes

- **BK** Black Jacket (UV Resistant)
- **DWB** Dry Water Block Cable Core
- **DT** Dry Tube
- **ILP** Interlock Armor Plenum Steel
- **ILPA** Interlock Armor Plenum Aluminum
- **ILPS** Interlock Armor Plenum Steel w/Sub-Units
- **ILPAS** Interlock Armor Plenum Aluminum w/Sub-Units
- **ILR** Interlock Armor Riser Steel
- **ILRA** Interlock Armor Riser Aluminum
- **ILRS** Interlock Armor Riser Steel w/Sub-Units
- **ILRAS** Interlock Armor Riser Aluminum w/Sub-Units
- **RIP** Ripcord

Series Type — Position 7, 8, 9

Outdoor:

E1S: Loose Tube TJ Dual Armor
H1A: Loose Tube DJ
H1F: Loose Tube DJ Armored
H1S: Loose Tube DJ Dual Armor
M1A: Loose Tube SJ
M1F: Loose Tube SJ Armored
M1N: Loose Tube SJ Armored Self-Supporting
M1Y: Loose Tube SJ Self-Supporting
R1A: Loose Tube SJ Ribbon cable
U1A: All-Dielectric Flat Drop Cable
U1A.TF: Toneable Flat Drop Cable
U2A: Mini (Figure-8) Drop Cable
UNFC: Compact Central Loose Tube Drop Cable
UNFS: Central Tube SJ Armored

Indoor:

B3D: Tight Buffer Breakout Plenum
B3R: Tight Buffer Breakout Riser
PNR/P1R: Tight Buffer Distribution Riser
PNU/P1D: Tight Buffer Distribution Plenum
PNZ/P1Z: Tight Buffer Distribution LSZH

Indoor/Outdoor:

ANR/A1R: Tight Buffer Distribution Riser
ANU/A1D: Tight Buffer Distribution Plenum
H1L: Loose Tube DJ Armored LSZH
H1M: Loose Tube DJ Riser – Chemical-Resistant
M1D: Loose Tube SJ Plenum
M1M: Loose Tube SJ Riser
M1Z: Loose Tube SJ LSZH
UNU: Central Tube SJ Plenum

Specialty:

GNC: Military Tactical Distribution Cable

Note: DJ = Dual Jacket
SJ = Single Jacket
TJ = Triple Jacket

Optical Fiber Code Cross-Reference

Fiber Type	General Cable	Corning® Optical Fiber	Description
Standard Loose Tube SM	AQ	SMF-28e+™ Fiber	Full spectrum, low water peak singlemode, ITU-T G.652.D
Performance Loose Tube SM	AT	SMF-28e+™ Fiber	Full spectrum, high performance low water peak singlemode with 0.35/0.25 attenuation, ITU-T G.652.D
Tight Buffer SM	AP	SMF-28e+™ Fiber	Full spectrum, low water peak singlemode with 900µm PVC buffer, ITU-T G.652.D
Long-Haul SM	AL	LEAF® Fiber	Large A_{eff}, low water peak, NZ-DSF singlemode, ITU-T G.655
Ultra-Bendable SM	AZ	ClearCurve® ZBL	Full spectrum with best macrobending performance, ITU-T G.652.D and ITU-T G.657.A
62.5 µm MM	CG	InfiniCor® 300 Fiber	1 Gb/s ≤ 300 m at 850 nm, OM1* 1 Gb/s ≤ 550 m at 1300 nm
62.5 µm MM	CL	InfiniCor® CL™ 1000 Fiber	1 Gb/s ≤ 500 m at 850 nm, OM1* 1 Gb/s ≤ 1000 m at 1300 nm
Ultra-bendable 50 µm MM	BI	ClearCurve® OM2 Fiber	10 Gb/s ≤ 150 m at 850 nm, OM2* 1 Gb/s ≤ 750 m at 850 nm
Ultra-bendable 50 µm MM	BE	ClearCurve® OM3 Fiber	10 Gb/s ≤ 300 m at 850 nm, OM3* 1 Gb/s ≤ 1000 m at 850 nm
Ultra-bendable 50 µm MM	BL	ClearCurve® OM4 Fiber	10 Gb/s ≤ 550 m at 850 nm, OM4* 1 Gb/s ≤ 1100 m at 850 nm
Ultra-bendable 50 µm MM	BM	ClearCurve® OM4 Fiber	10 Gb/s ≤ 600 m at 850 nm, OM4+* 1 Gb/s ≤ 1100 m at 850 nm

* Designation per ISO 11801 Fiber Standards

SMF-28e+ is a trademark and Corning, LEAF, InfiniCor and Plus Corning Optical Fiber are registered trademarks of Corning Incorporated, Corning, NY, U.S.A.