
Tight Buffer Distribution Interlock Armored Plenum Cable


Type OFCP, CSA FT6

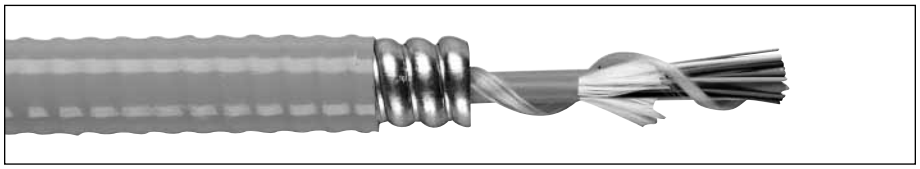


CATALOG NUMBER	FIBER COUNT	NO. OF SUB-UNITS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
							INSTALLATION		IN-SERVICE	
			IN	mm	LBS/1000'	kg/km	LBS	N	LBS	N
XX0021PNU-ILPA	2	—	0.50	12.7	80	119	550	2447	165	734
XX0041PNU-ILPA	4	—	0.50	12.7	82	122	550	2447	165	734
XX0061PNU-ILPA	6	—	0.50	12.7	84	125	550	2447	165	734
XX0121PNU-ILPA	12	—	0.55	14.0	100	149	550	2447	165	734
XX0241PNU-ILPA	24	—	0.65	16.5	138	205	550	2447	165	734
XX0241PNU-ILPAS	24	4	0.70	17.8	136	202	1000	4448	300	1334
XX0361PNU-ILPAS	36	6	0.73	18.5	158	235	1000	4448	300	1334
XX0481PNU-ILPAS	48	4	0.80	20.3	209	311	1000	4448	300	1334
XX0601PNU-ILPAS	60	5	0.85	21.6	187	278	1000	4448	300	1334
XX0721PNU-ILPAS	72	6	0.95	24.1	273	406	1000	4448	300	1334
XX0961PNU-ILPAS	96	8	1.05	26.7	328	488	1000	4448	335	1490
XX1201PNU-ILPAS	120	10	1.10	27.9	372	554	1000	4448	335	1490
XX1441PNU-ILPAS	144	12	1.20	30.5	386	574	1000	4448	335	1490

XX Denotes glass type.
A complete listing of NextGen® Brand glass types is specified on page 3 of this catalog.

Typical Cross-Sections

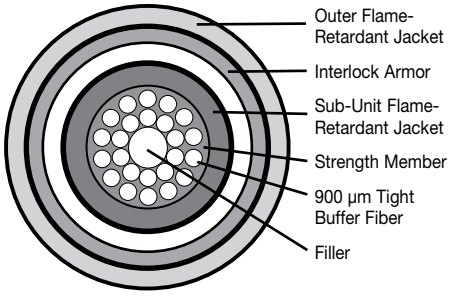

PNU-ILPA ≤ 24 Fiber

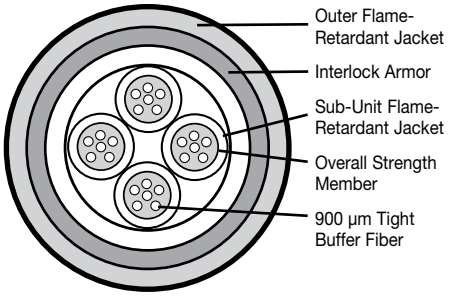

PNU-ILPAS ≥ 24 Fiber

Hybrid designs (containing singlemode and multimode fiber) and composite designs (containing copper conductors) are also available.

Ordering Part Number Example

CG0241PNU-ILPA or CG0241PNU-ILPAS

62.5 mm multimode, 24 fibers, tight buffer distribution interlock armor plenum
Please see pages 4 and 5 for a complete guide on part number selection and ordering information.

Product Construction:

Fiber:
- 4–144 fibers
- 900 µm tight buffer
- Color-coding per TIA/EIA 598 B

Overall Strength Member:
- Aramid fiber yarn

Inner Jacket:
- Flame-retardant material

Armor:
- Interlock aluminum (-ILPA)

Outer Jacket:
- Sequential footage markings*
- Orange jacket—multimode fibers (except 10 Gbps)
- Aqua jacket—10 Gbps multimode fibers
- Yellow jacket—singlemode fibers

Features:
- Interlock armor provides outstanding mechanical protection
- Interlock armor is flexible and easy to use
- Tight buffer provides individual fiber protection
- Sub-units are numbered for identification

Performance:
- Temperature:
  Storage -40°C (-40°F) to +70°C (+158°F)
  Installation 0°C (+32°F) to +50°C (+122°F)
  Operating -20°C (-4°F) to +70°C (+158°F)
- Minimum Bend Radius
  20 X OD—Installation
  10 X OD—In-Service
- Maximum Crush Resistance:
  1,500 lbs/in (2,627 N/cm)

Applications:
- Harsh premises environments requiring heavy-duty protection
- ETL Type OFCP for installation in any premises location when installed in accordance with NEC article 770-51 (a) and 770-53 (a)

Compliances:
- ETL Listed Type OFCP
- CSA FT6

Note:
Armored cable without an outer jacket available upon request (-IL)

*Sequential meter markings available upon request

NEXTGEN® BRAND

General Cable

Fiber Optic Part Number System

Example: AP0121PNU-ILPA
Singlemode, 12 Fibers, Tight Buffer Distribution Plenum, Interlock Armor Plenum Aluminum

A	P	0	1	2	1	P	N	U	ILPA
1	2	3	4	5	6	7	8	9	[SUFFIX]

Fiber Grade — Position 1, 2

In position 1
A: Singlemode (sm)
B: 50 MM Multimode (mm)
C: 62.5 MM Multimode (mm)
For position 2, reference pages 2 and 3 for fiber specifications and grades.

Requested Fiber Count — Position 3, 4, 5

Standard Offerings:
6 12 24 36 48 72

Buffer Construction — Position 6

1) Tight Buffer; 3) Single Fiber Loose Tube (Gel-filled); 4) Multi-Fiber Loose Tube (Gel-Filled); 6) Bare/Ribbon

Note: 2) Quick Strip and 5) Loose Buffer no longer available

Suffixes

- **BK** Black Jacket (UV Resistant)
- **DWB** Dry Water Block Cable Core
- **DT** Dry Tube
- **ILP** Interlock Armor Plenum Steel
- **ILPA** Interlock Armor Plenum Aluminum
- **ILPS** Interlock Armor Plenum Steel w/Sub-Units
- **ILPAS** Interlock Armor Plenum Aluminum w/Sub-Units
- **ILR** Interlock Armor Riser Steel
- **ILRA** Interlock Armor Riser Aluminum
- **ILRS** Interlock Armor Riser Steel w/Sub-Units
- **ILRAS** Interlock Armor Riser Aluminum w/Sub-Units
- **RIP** Ripcord

Series Type — Position 7, 8, 9

Outdoor:

E1S: Loose Tube TJ Dual Armor
H1A: Loose Tube DJ
H1F: Loose Tube DJ Armored
H1S: Loose Tube DJ Dual Armor
M1A: Loose Tube SJ
M1F: Loose Tube SJ Armored
M1N: Loose Tube SJ Armored Self-Supporting
M1Y: Loose Tube SJ Self-Supporting
R1A: Loose Tube SJ Ribbon cable
U1A: All-Dielectric Flat Drop Cable
U1A.TF: Toneable Flat Drop Cable
U2A: Mini (Figure-8) Drop Cable
UNFC: Compact Central Loose Tube Drop Cable
UNFS: Central Tube SJ Armored

Indoor:

B3D: Tight Buffer Breakout Plenum
B3R: Tight Buffer Breakout Riser
PNR/P1R: Tight Buffer Distribution Riser
PNU/P1D: Tight Buffer Distribution Plenum
PNZ/P1Z: Tight Buffer Distribution LSZH

Indoor/Outdoor:

ANR/A1R: Tight Buffer Distribution Riser
ANU/A1D: Tight Buffer Distribution Plenum
H1L: Loose Tube DJ Armored LSZH
H1M: Loose Tube DJ Riser – Chemical-Resistant
M1D: Loose Tube SJ Plenum
M1M: Loose Tube SJ Riser
M1Z: Loose Tube SJ LSZH
UNU: Central Tube SJ Plenum

Specialty:

GNC: Military Tactical Distribution Cable

Note: DJ = Dual Jacket
SJ = Single Jacket
TJ = Triple Jacket

Optical Fiber Code Cross-Reference

Fiber Type	General Cable	Corning® Optical Fiber	Description
Standard Loose Tube SM	AQ	SMF-28e+™ Fiber	Full spectrum, low water peak singlemode, ITU-T G.652.D
Performance Loose Tube SM	AT	SMF-28e+™ Fiber	Full spectrum, high performance low water peak singlemode with 0.35/0.25 attenuation, ITU-T G.652.D
Tight Buffer SM	AP	SMF-28e+™ Fiber	Full spectrum, low water peak singlemode with 900µm PVC buffer, ITU-T G.652.D
Long-Haul SM	AL	LEAF® Fiber	Large A_{eff}, low water peak, NZ-DSF singlemode, ITU-T G.655
Ultra-Bendable SM	AZ	ClearCurve® ZBL	Full spectrum with best macrobending performance, ITU-T G.652.D and ITU-T G.657.A
62.5 µm MM	CG	InfiniCor® 300 Fiber	1 Gb/s ≤ 300 m at 850 nm, OM1* 1 Gb/s ≤ 550 m at 1300 nm
62.5 µm MM	CL	InfiniCor® CL™ 1000 Fiber	1 Gb/s ≤ 500 m at 850 nm, OM1* 1 Gb/s ≤ 1000 m at 1300 nm
Ultra-bendable 50 µm MM	BI	ClearCurve® OM2 Fiber	10 Gb/s ≤ 150 m at 850 nm, OM2* 1 Gb/s ≤ 750 m at 850 nm
Ultra-bendable 50 µm MM	BE	ClearCurve® OM3 Fiber	10 Gb/s ≤ 300 m at 850 nm, OM3* 1 Gb/s ≤ 1000 m at 850 nm
Ultra-bendable 50 µm MM	BL	ClearCurve® OM4 Fiber	10 Gb/s ≤ 550 m at 850 nm, OM4* 1 Gb/s ≤ 1100 m at 850 nm
Ultra-bendable 50 µm MM	BM	ClearCurve® OM4 Fiber	10 Gb/s ≤ 600 m at 850 nm, OM4+* 1 Gb/s ≤ 1100 m at 850 nm

* Designation per ISO 11801 Fiber Standards

SMF-28e+ is a trademark and Corning, LEAF, InfiniCor and Plus Corning Optical Fiber are registered trademarks of Corning Incorporated, Corning, NY, U.S.A.