
Super Vu-Tron® Multi-Conductor Type W Round

90°C (UL), Type W, 2000 Volt Portable Power Cable

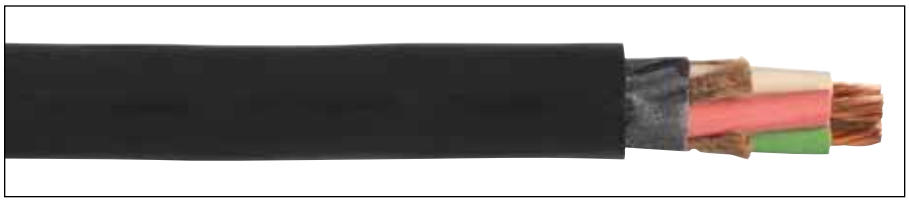

CATALOG NUMBER	NO. OF COND.	AWG OR kcmil	COND. STRAND	NOMINAL COND. O.D.		NOMINAL INS. THICKNESS		NOMINAL O.D.		CURRENT AMPS(1)	APPROX. NET WT. LBS/M'(S)
				INCHES	mm	INCHES	mm	INCHES	mm		
2 CONDUCTOR – TYPE W – 2000 VOLT											
81312	2	8	133	0.160	4.06	0.060	1.52	0.770	19.56	74	325
81622	2	6	259	0.198	5.03	0.060	1.52	0.910	23.11	99	470
81642	2	4	259	0.245	6.22	0.060	1.52	1.020	25.91	130	620
81662	2	2	259	0.297	7.54	0.080	2.03	1.210	30.73	174	935
81372*	2	1	259	0.353	8.97	0.080	2.03	1.370	34.80	202	1305
81382*	2	1/0	259	0.385	9.78	0.080	2.03	1.435	36.45	234	1555
81392*	2	2/0	259	0.442	11.23	0.080	2.03	1.555	39.50	271	1860
81402*	2	3/0	259	0.480	12.19	0.080	2.03	1.670	42.42	313	2230
81412*	2	4/0	259	0.555	14.10	0.080	2.03	1.815	46.10	361	2655
3 CONDUCTOR – TYPE W – 2000 VOLT											
81313	3	8	133	0.160	4.06	0.060	1.52	0.925	23.50	74	470
81623	3	6	259	0.198	5.03	0.060	1.52	0.995	25.27	99	625
81643	3	4	259	0.245	6.22	0.060	1.52	1.095	27.81	130	810
81663	3	2	259	0.297	7.54	0.080	2.03	1.285	32.64	174	1190
81373*	3	1	259	0.353	8.97	0.080	2.03	1.445	36.70	202	1655
81383	3	1/0	259	0.385	9.78	0.080	2.03	1.555	39.50	234	1965
81393	3	2/0	259	0.442	11.23	0.080	2.03	1.670	42.42	271	2350
81403*	3	3/0	259	0.480	12.19	0.080	2.03	1.815	46.10	313	2890
81413*	3	4/0	259	0.555	14.10	0.080	2.03	1.930	49.02	361	3285
81423*	3	250	627	0.615	15.62	0.095	2.41	2.390	60.71	402	5070
81443*	3	350	855	0.725	18.42	0.095	2.41	2.680	68.07	495	6570
81473*	3	500	1235	0.880	22.35	0.095	2.41	3.030	76.96	613	8700
4 CONDUCTOR – TYPE W – 2000 VOLT											
81314	4	8	133	0.160	4.06	0.060	1.52	0.980	24.89	65	615
81624	4	6	259	0.198	5.03	0.060	1.52	1.070	27.18	87	800
81644	4	4	259	0.245	6.22	0.060	1.52	1.210	30.73	114	1040
81664	4	2	259	0.297	7.54	0.080	2.03	1.435	36.45	152	1580
81374	4	1	259	0.353	8.97	0.080	2.03	1.595	40.51	177	2045
81384	4	1/0	259	0.385	9.78	0.080	2.03	1.705	43.31	205	2430
81394	4	2/0	259	0.442	11.23	0.080	2.03	1.845	46.86	237	2950
81404	4	3/0	259	0.480	12.19	0.080	2.03	1.965	49.91	274	3430
81414	4	4/0	259	0.555	14.10	0.080	2.03	2.145	54.48	316	3885
5 CONDUCTOR – TYPE W – 2000 VOLT											
81315	5	8	133	0.160	4.06	0.060	1.52	1.030	26.16	52	650
81625	5	6	259	0.198	5.03	0.060	1.52	1.170	29.72	69	915
81645	5	4	259	0.245	6.22	0.060	1.52	1.360	34.54	91	1320
81665	5	2	259	0.297	7.54	0.080	2.03	1.595	40.51	121	1925
81375*	5	1	259	0.353	8.97	0.080	2.03	1.820	46.23	141	2675
81385	5	1/0	259	0.385	9.78	0.080	2.03	1.900	48.26	164	2885
81395*	5	2/0	259	0.442	11.23	0.080	2.03	2.060	52.32	189	3630
81405*	5	3/0	259	0.480	12.19	0.080	2.03	2.260	57.40	219	4900
81415*	5	4/0	259	0.555	14.10	0.080	2.03	2.460	62.48	252	5980

(1) Ampacities based on 90°C conductor and 30°C ambient temperature per Table 400.5(A)(2) of the National Electrical Code®.

* Non-stock item; minimum quantity purchase required.

** Green conductor for grounding only.

(S) Actual shipping weight may vary.

Product Construction:

Conductor:
- 8 AWG through 500 kcmil fully annealed stranded bare copper

Insulation:
- Premium-grade, color-coded 90°C EPDM
- Color code: See chart below

Jacket:
- Super Vu-Tron® 90°C, black
- Temperature range: -40°C to +90°C

Jacket Marking:
- SIZES SMALLER THAN 2-1/4" – CAROL SUPER VU-TRON® (SIZE) TYPE W PORTABLE POWER CABLE (UL) 2000 V DRY 90°C WET 75°C SUN RES P-7K-123049-MSHA---CSA TYPE W (-40°C) 2 KV FT5 MADE IN USA (TRU-MARK SEQUENTIAL FOOTAGE)
- SIZES 2-1/4" AND LARGER – (SIZE) TYPE W CAROL SUPER VU-TRON® 90°C DRY AND WATER RESISTANT 75°C 2000 V SUN RES (UL) P-7K-123049 MSHA LR27161 MADE IN USA (TRU-MARK SEQUENTIAL FOOTAGE)

Applications:
- Industrial and light- to medium-duty mining applications
- Heavy-duty service as power supply cable
- AC systems (grounded and ungrounded)
- Mobile and portable electrical equipment
- Motor and battery leads
- 2-conductor cables—use on DC or AC single-phase systems where grounding is not required
- 3-conductor cables—use on AC systems where no grounding is required or on DC systems with one conductor for grounding
- 4-conductor cables—use on two- or three-phase AC systems with one conductor used for grounding
- 5-conductor cables—use in applications where separating the system neutral from the frame ground is required

Features:
- Withstands severe environmental conditions
- Suitable for immersion in water*
- Indent-printed for easy identification
- Withstands exposure to oil, acids, alkalies, heat, moisture and most chemicals
- Rope lay stranding for maximum flex life
- Excellent impact resistance
- Cable core bound for superior flexibility and toughness
- Sunlight-resistant
- TRU-Mark® sequential footage marking

Industry Approvals:
- CSA
- MSHA Approved
- UL Type W
- RoHS Compliant

Packaging:
- Lengths cut to order

* Suitable for immersion in water if properly sealed and terminated.

COLOR CODE CHART

NO. OF CONDUCTORS	COLOR**
2	Black, White
3	Black, White, Green
4	Black, White, Red, Green
5	Black, White, Red, Green, Orange

CAROL BRAND

UL LISTED

CSA Certified Canadian Standard Association

MSHA Mine Safety and Health Administration

RoHS Compliant Directive 2002/95/EC

Made in U.S.A.

General Cable