
Tight Buffer Distribution Riser Cable


Type OFNR, CSA FT4

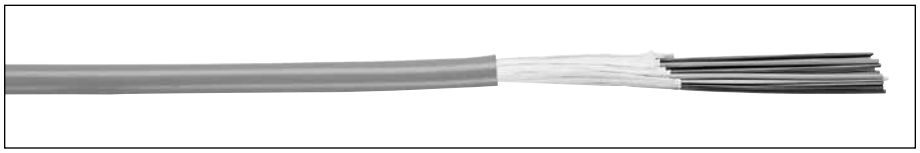


CATALOG NUMBER	FIBER COUNT	NO. OF SUB-UNITS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
							INSTALLATION		IN-SERVICE	
			IN	mm	LBS/1000'	kg/km	LBS	N	LBS	N
XX0021ANR.BK	2	—	0.19	5	14	20	300	1334	90	400
XX0041ANR.BK	4	—	0.20	5	16	24	320	1423	96	427
XX0061ANR.BK	6	—	0.22	6	18	27	320	1423	96	427
XX0081ANR.BK	8	—	0.22	6	20	30	320	1423	96	427
XX0101ANR.BK	10	—	0.24	6	23	34	400	1780	120	534
XX0121ANR.BK	12	—	0.25	6	24	36	400	1780	120	534
XX0181A1R.BK	18	3	0.47	12	79	118	750	3336	250	1112
XX0181ANR.BK	18	—	0.33	8	45	67	320	1425	112	500
XX0241A1R.BK	24	4	0.53	13	86	128	1000	4448	300	1334
XX0241ANR.BK	24	—	0.34	9	47	70	320	1425	112	500
XX0361A1R.BK	36	6	0.66	17	147	219	1300	5783	390	1735
XX0481A1R.BK	48	4	0.64	16	137	204	1300	5783	390	1735
XX0601A1R.BK	60	5	0.70	18	168	250	1500	6672	450	2002
XX0721A1R.BK	72	6	0.77	20	207	308	1900	8452	570	2535
XX0961A1R.BK	96	8	0.91	23	289	430	2000	8896	670	2980
XX1201A1R.BK	120	10	1.02	26	313	466	3000	13345	1000	4448
XX1441A1R.BK	144	12	1.02	26	314	467	3000	13345	1000	4448

XX denotes glass type.
A complete listing of NextGen® Brand glass types is specified on page 3 of this catalog.

Typical Cross-Sections

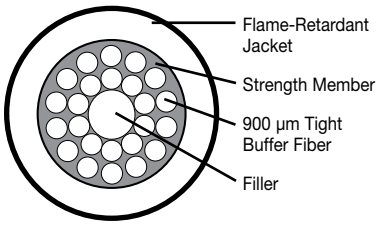

ANR ≤ 24 Fiber

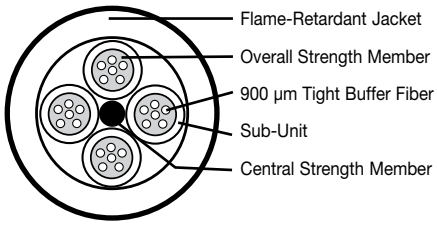

A1R ≥ 18 Fiber

Hybrid designs (containing singlemode and multimode fiber) and composite designs (containing copper conductors) are also available.

Ordering Part Number Example

CG0241ANR.BK or CG0241A1R.BK

62.5 mm multimode, 24 fibers, tight buffer distribution riser
Please see pages 4 and 5 for a complete guide on part number selection and ordering information.

Product Construction:

Fiber:

- 2–144 fibers
- 900 µm tight buffer
- Color-coding per TIA/EIA 598 B

Central Strength Member:

- Epoxy/glass rod (above 12 fibers)

Overall Strength Member:

- Aramid fiber yarn

Jacket:

- UV-resistant black jacket
- Flame-retardant polyvinyl chloride (PVC)
- Sequential footage markings*

Features:

- Dry Water Block cable core for fiber protection
- Improved temperature performance
- Direct termination of connectors on tight buffer
- Sub-units are numbered for identification

Performance:

- Temperature:
  Storage -40˚C (-40˚F) to +70˚C (+158˚F)
  Installation 0˚C (+32˚F) to +50˚C (+122˚F)
  Operating -40˚C (-40˚F) to +70˚C (+158˚F)
- Minimum Bend Radius:
  20 X OD—Installation
  10 X OD—In-Service
- Maximum Crush Resistance:
  850 lbs/in (1485 N/cm)
- Maximum Vertical Rise—1,640 ft (500 m)

Applications:

- Intrabuilding and interbuilding voice or data communication backbones
- Outdoor use in ducts and underground conduits
- ETL Listed Type OFNR for installation in vertical riser and general horizontal applications when installed in accordance with NEC article 770-51 (b) and 770-53 (b)

Compliances:

- ETL Listed Type OFNR
- CSA FT4
- ICEA S-104-696
- RoHS Compliant Directive 2002/95/EC

*Sequential meter markings available upon request

NEXTGEN® BRAND

RoHS Compliant Directive 2002/95/EC

General Cable

Fiber Optic Part Number System

Example: AP0121PNU-ILPA
Singlemode, 12 Fibers, Tight Buffer Distribution Plenum, Interlock Armor Plenum Aluminum

A	P	0	1	2	1	P	N	U	ILPA
1	2	3	4	5	6	7	8	9	[SUFFIX]

Fiber Grade — Position 1, 2

In position 1
A: Singlemode (sm)
B: 50 MM Multimode (mm)
C: 62.5 MM Multimode (mm)
For position 2, reference pages 2 and 3 for fiber specifications and grades.

Requested Fiber Count — Position 3, 4, 5

Standard Offerings:
6 12 24 36 48 72

Buffer Construction — Position 6

1) Tight Buffer; 3) Single Fiber Loose Tube (Gel-filled); 4) Multi-Fiber Loose Tube (Gel-Filled); 6) Bare/Ribbon

Note: 2) Quick Strip and 5) Loose Buffer no longer available

Suffixes

- **BK** Black Jacket (UV Resistant)
- **DWB** Dry Water Block Cable Core
- **DT** Dry Tube
- **ILP** Interlock Armor Plenum Steel
- **ILPA** Interlock Armor Plenum Aluminum
- **ILPS** Interlock Armor Plenum Steel w/Sub-Units
- **ILPAS** Interlock Armor Plenum Aluminum w/Sub-Units
- **ILR** Interlock Armor Riser Steel
- **ILRA** Interlock Armor Riser Aluminum
- **ILRS** Interlock Armor Riser Steel w/Sub-Units
- **ILRAS** Interlock Armor Riser Aluminum w/Sub-Units
- **RIP** Ripcord

Series Type — Position 7, 8, 9

Outdoor:

E1S: Loose Tube TJ Dual Armor
H1A: Loose Tube DJ
H1F: Loose Tube DJ Armored
H1S: Loose Tube DJ Dual Armor
M1A: Loose Tube SJ
M1F: Loose Tube SJ Armored
M1N: Loose Tube SJ Armored Self-Supporting
M1Y: Loose Tube SJ Self-Supporting
R1A: Loose Tube SJ Ribbon cable
U1A: All-Dielectric Flat Drop Cable
U1A.TF: Toneable Flat Drop Cable
U2A: Mini (Figure-8) Drop Cable
UNFC: Compact Central Loose Tube Drop Cable
UNFS: Central Tube SJ Armored

Indoor:

B3D: Tight Buffer Breakout Plenum
B3R: Tight Buffer Breakout Riser
PNR/P1R: Tight Buffer Distribution Riser
PNU/P1D: Tight Buffer Distribution Plenum
PNZ/P1Z: Tight Buffer Distribution LSZH

Indoor/Outdoor:

ANR/A1R: Tight Buffer Distribution Riser
ANU/A1D: Tight Buffer Distribution Plenum
H1L: Loose Tube DJ Armored LSZH
H1M: Loose Tube DJ Riser – Chemical-Resistant
M1D: Loose Tube SJ Plenum
M1M: Loose Tube SJ Riser
M1Z: Loose Tube SJ LSZH
UNU: Central Tube SJ Plenum

Specialty:

GNC: Military Tactical Distribution Cable

Note: DJ = Dual Jacket
SJ = Single Jacket
TJ = Triple Jacket

Optical Fiber Code Cross-Reference

Fiber Type	General Cable	Corning® Optical Fiber	Description
Standard Loose Tube SM	AQ	SMF-28e+™ Fiber	Full spectrum, low water peak singlemode, ITU-T G.652.D
Performance Loose Tube SM	AT	SMF-28e+™ Fiber	Full spectrum, high performance low water peak singlemode with 0.35/0.25 attenuation, ITU-T G.652.D
Tight Buffer SM	AP	SMF-28e+™ Fiber	Full spectrum, low water peak singlemode with 900µm PVC buffer, ITU-T G.652.D
Long-Haul SM	AL	LEAF® Fiber	Large A_{eff}, low water peak, NZ-DSF singlemode, ITU-T G.655
Ultra-Bendable SM	AZ	ClearCurve® ZBL	Full spectrum with best macrobending performance, ITU-T G.652.D and ITU-T G.657.A
62.5 µm MM	CG	InfiniCor® 300 Fiber	1 Gb/s ≤ 300 m at 850 nm, OM1* 1 Gb/s ≤ 550 m at 1300 nm
62.5 µm MM	CL	InfiniCor® CL™ 1000 Fiber	1 Gb/s ≤ 500 m at 850 nm, OM1* 1 Gb/s ≤ 1000 m at 1300 nm
Ultra-bendable 50 µm MM	BI	ClearCurve® OM2 Fiber	10 Gb/s ≤ 150 m at 850 nm, OM2* 1 Gb/s ≤ 750 m at 850 nm
Ultra-bendable 50 µm MM	BE	ClearCurve® OM3 Fiber	10 Gb/s ≤ 300 m at 850 nm, OM3* 1 Gb/s ≤ 1000 m at 850 nm
Ultra-bendable 50 µm MM	BL	ClearCurve® OM4 Fiber	10 Gb/s ≤ 550 m at 850 nm, OM4* 1 Gb/s ≤ 1100 m at 850 nm
Ultra-bendable 50 µm MM	BM	ClearCurve® OM4 Fiber	10 Gb/s ≤ 600 m at 850 nm, OM4+* 1 Gb/s ≤ 1100 m at 850 nm

* Designation per ISO 11801 Fiber Standards

SMF-28e+ is a trademark and Corning, LEAF, InfiniCor and Plus Corning Optical Fiber are registered trademarks of Corning Incorporated, Corning, NY, U.S.A.