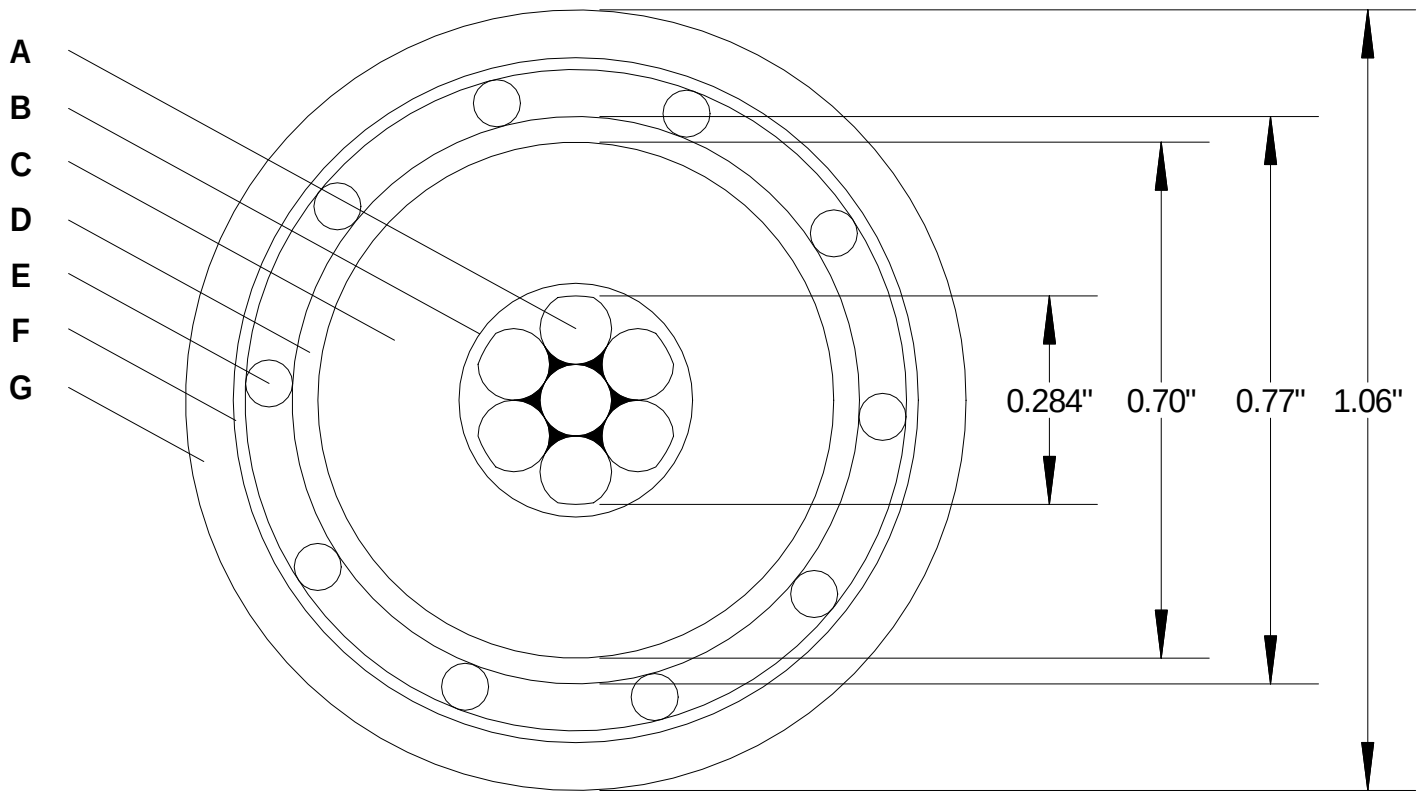


**A**. #2 AWG Class B compressed, 7 str aluminum with Strandseal®

**B**. Semi-conducting, thermosetting, supersmooth conductor shield
12 mils minimum point

**C**. TR-XLPE insulation, 15 kV 100%
165 mils minimum point
175 mils nominal
205 mils maximum point

**D**. Semi-conducting, thermosetting insulation shield
30 mils minimum point
60 mils maximum point

**E**. 10 - #14 AWG bare copper concentric neutral wires with water-swellable powder and ripcords

**F**. Longitudinally applied water-swellable tape

**G**. Black linear low density polyethylene jacket with three longitudinal red stripes
50 mils minimum point
80 mils maximum point

## Standards

Exelon EM29129
Dated March 21, 2005

## Cable Weight

0.47 lbs/ft

## Notes

1. Cable weights and dimensions are nominal and subject to normal manufacturing tolerances.
2. Drawing is not to scale.
3. Minimum point insulation shield thickness does not include concentric neutral indent.

PRYSMIAN CABLES & SYSTEMS

| Cable Type | | Customer | |
|---|---|---|---|
| **15 kV #2 AWG Superdri™** | | | |
| Drawn By | Approved By | Date | Drawing Number |
| **D. Vinczi** | **G. Chavarria** | **06/18/07** | **306091A** |