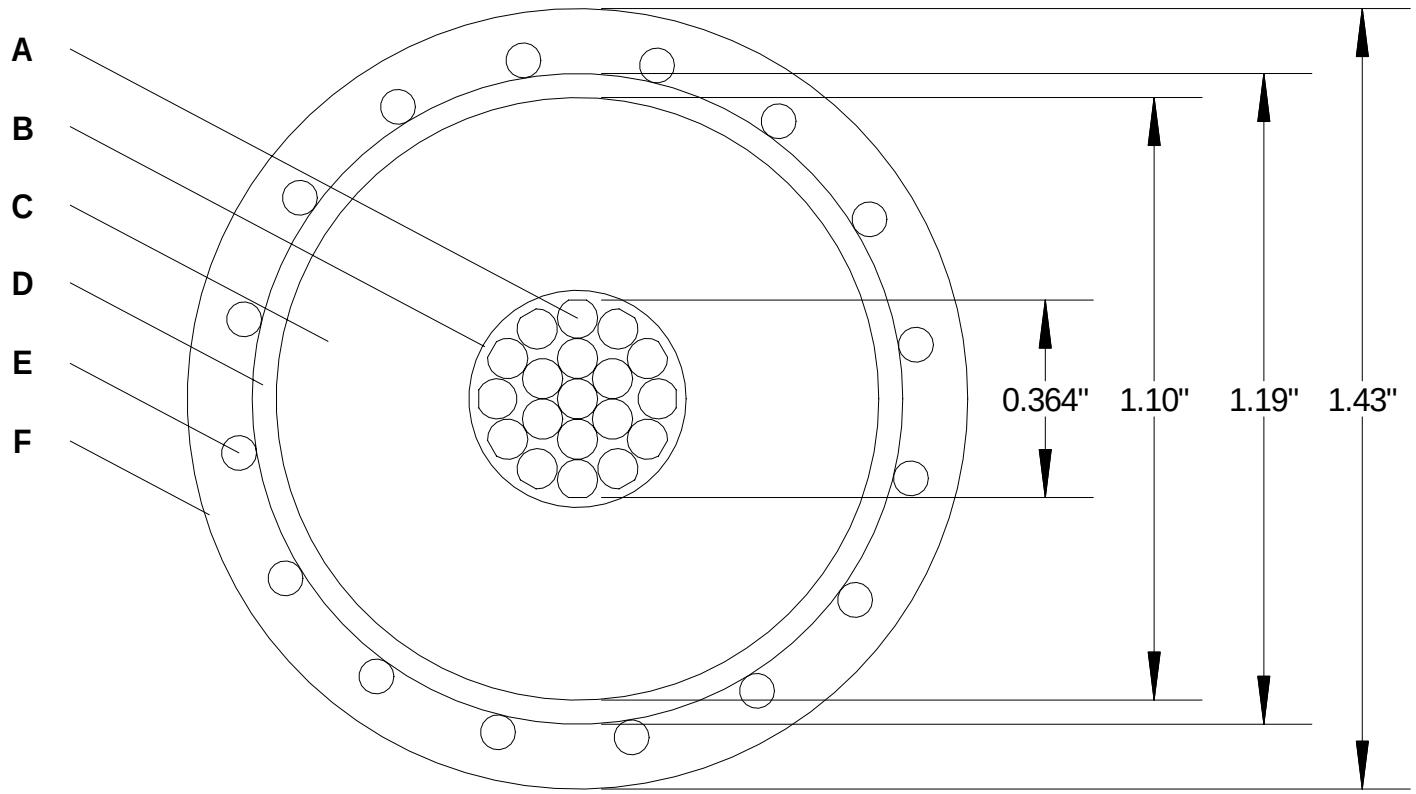

A. 1/0 AWG Class B compressed, 19 str aluminum

B. Semi-conducting, thermosetting, supersmooth conductor shield
12 mils minimum point

C. TR-XLPE insulation, 35 kV 100%
311 mils minimum point
345 mils minimum average

D. Semi-conducting, thermosetting insulation shield
40 mils minimum point
75 mils maximum point

E. 16 - #14 AWG bare copper concentric neutral wires

F. Black encapsulating linear low density polyethylene jacket with three longitudinal red stripes
40 mils minimum point
50 mils minimum average

Standards

Philadelphia Electric Company
125-P-30 dated January 1999

Cable Weight

0.91 lbs/ft

Notes

1. Cable weights and dimensions are nominal and subject to normal manufacturing tolerances.
2. Drawing is not to scale.
3. Minimum point insulation shield thickness does not include concentric neutral indent.

PRYSMIAN CABLES & SYSTEMS	Cable Type **35 kV 1/0 AWG URD**		Customer	
	Drawn By **D. Vinczi**	Approved By **G. Chavarria**	Date **11/16/06**	Drawing Number **301299A**