RG 59+2x18AWG POWER — H59+182VRXXX

Cross Section

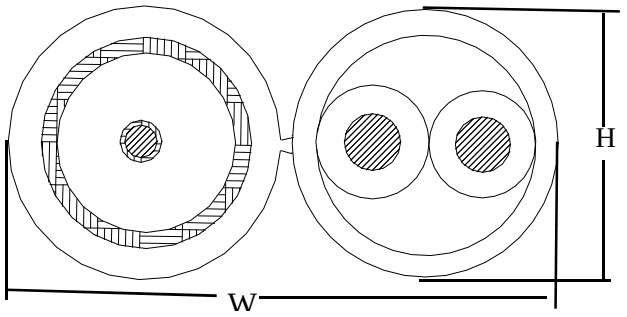

Marking

E223070-310 RG59/U+2/18 AWG C(ETL)US 3184227 VERIFIED CMR FT4 XXXXFT

Description

Rated Temperature (°C)	75
Product Standard Certification	ETL
Flammability Test	CMR
Application	
Drop cable for interior applications	
Reference Standard	
SCTE IPS-SP-001, UL1655, UL13, UL444	

Construction

Center Conductor		**Bare Copper**
AWG		20
Dia.		0.82
Insulation		**Skin Foam PE**
Nom. Thickness(mm)		1.42
Insulation Dia. (±0.08mm)		3.66
Al-maylar Shield (Overlapping, %)		>=25
Braid Shield	**Copper Clad Aluminum (CCA)**	
Construction (mm)		16/7/0.16
Coverage Area (%)		>=95
	POWER CABLE	CCTV
Jacket	**PVC**	**PVC**
Nom. Thickness (mm)	0.78	0.80
Min. Thickness(mm)	0.62	0.68
Cable Dia.(±0.20mm)	7.00	6.00

POWER

Rated Voltage/Temperature	30V/75℃
Flammability Test	CMR
Conductor Stranded (mm)	16/0.254
Insulation Dia(±0.2mm)	2.8
Cores: 1 Black 2.Red	
H(±0.2mm)	7.0
W(±0.2mm)	13.5
Weight(lbs/1,000ft)	38

Color

Jacket Color: Black / White
UV Rated if Black

Part No.: **H59+182VRXXX**

White : WH Black : BK
500ft (Reel in a box) : 3 1000ft Reel : 2

Revision History

Performance

Electrical Characteristics:

Frequency (MHz)	Attenuation (dB/100m)
1	1.15
50	5.71
100	8.20
200	11.61
400	16.73
700	22.15
1000	28.87

Dielectric Strength (kV/min)	1.0
Impedence (±3.0ohms)	75.0
SRL (dB,5~1000MHz)	>=20
Capacitance (pF/m)	53.1
Conductor DCR@ 20°C (ohms/km)	<=31.9
Velocity Of Propagation (%)	>=82

Mechanical Characteristics:

Test Object		**Jacket**
Test Material		PVC
Before Aging	Tensile Strength (Mpa)	>=13.8
	Elongation (%)	>=100
Aging Condition (°C×hrs)		100× 240
After Aging	Tensile Strength (Mpa)	>= 85% unaged
	Elongation (%)	>= 50% unaged
Cold Bend (-20±2°C×4hrs)		No crack
Jacket impact test(-15°C)		No crack
Jacket Longitudinal Shrinkage (%)		<=5
Center Conductor Bond To dielectric (N)		>=2.3

POWER INSULATION

Mechanical Characteristics:

Test Material		PVC
Before Aging	Tensile Strength (Mpa)	>=10.35
	Elongation (%)	>=100
Aging Condition (°Cxhrs)		113±2℃x168
After Aging	Tensile Strength (Mpa)	>=70% of original
	Elongation (%)	>=65% of original

Prepared By: David Kim 2010.10.12 Rev.: 4
Revised By: Kevin Chang 2010.10.12