SunGen™

EPR/CPE, Photovoltaic Wire
2000V, UL Type PV/RHH or RHW-2 or 600V USE-2, 90°C

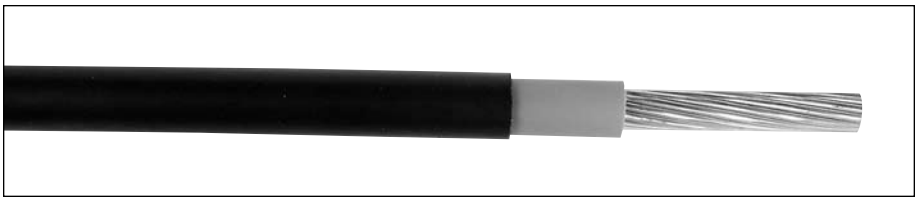

Product Construction:

Conductor:
- 14 AWG thru 2 AWG tinned coated compressed copper. Class C stranding per ASTM B33 and B8
- 1 AWG thru 4/0 AWG tinned coated compressed copper. Class B stranding per ASTM B33 and B8

Insulation:
- Lead-free Ethylene Propylene Rubber (EPR) colored for contrast with black lead-free Cross-Linked Chlorinated Polyethylene (XL-CPE)

Print:
- GENERAL CABLE® (PLANT OF MFG) 2000V PV WIRE OR RHH OR RHW-2 OR 600V USE-2 (SIZE) 90°C WET OR DRY SUN RES (UL) -40°C VW-1 MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

Options:
- Bare copper conductor
- Other stranding options are available upon request
- Colors available on request

Applications:
- Single conductor, sunlight-resistant, photovoltaic wire rated 90°C wet or dry, 2000V for interconnection wiring of grounded and ungrounded photovoltaic power systems as described in Section 690.31(A) and other applicable parts of the National Electrical Code (NEC), NFPA 70

Features:
- Rated 90°C wet and dry
- Deformation-resistant at high temperatures
- Excellent moisture resistance, exceeds UL 44
- Stable electrical properties over a broad temperature range
- Excellent flexibility at low temperatures, making it suitable for sub-zero conditions
- Extra tough, mechanically rugged composite insulation and jacket construction
- Resistant to most oils and chemicals
- UV/sunlight-resistant
- Meets UL 44 cold bend test at -40°C

Compliances:
Industry Compliances:
- UL 4703 Type PV
- National Electrical Code (NEC)
- ICEA S-95-658/NEMA WC70
- UL 44 Type RHH or RHW-2, UL File # E90494
- UL 854 Type USE-2 for 600V, UL File # E90499
- Low Smoke Rating per UL

Flame Test Compliances:
- UL 1581 VW-1
- For sizes 1/0 and larger: IEEE 383, IEEE 1202/CSA FT4

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP
- OSHA Acceptable

Packaging:
- Material cut to length and shipped on non-returnable wood reels

CATALOG NUMBER	COND. SIZE (AWG)	COND. STRAND	NOMINAL COND. O.D.		NOMINAL INSULATION		NOMINAL JACKET		NOMINAL CABLE O.D.		COPPER WEIGHT		NOMINAL WEIGHT	
			INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	LBS/ 1000 FT	kg/km	LBS/ 1000 FT	kg/km
14 AWG - 4/0 AWG CONDUCTORS														
12221.711400	14	19/.0142	0.070	1.78	0.045	1.14	0.030	0.76	0.232	5.89	13	19	36	54
12221.711200	12	19/.0185	0.088	2.23	0.045	1.14	0.030	0.76	0.250	6.35	20	30	46	68
12221.711100	10	19/.0234	0.112	2.84	0.045	1.14	0.030	0.76	0.273	6.93	32	48	64	95
12221.710800*	8	19/.0295	0.143	3.63	0.055	1.40	0.030	0.76	0.332	8.43	50	74	95	141
12221.710600*	6	19/.0372	0.184	4.67	0.055	1.40	0.045	1.14	0.398	10.11	81	121	148	220
12221.710400*	4	19/.0469	0.234	5.94	0.055	1.40	0.045	1.14	0.442	11.23	129	192	208	309
12221.710200*	2	19/.0526	0.296	7.52	0.055	1.40	0.045	1.14	0.507	12.88	205	305	306	455
12221.710100*	1	19/.0664	0.323	8.20	0.065	1.65	0.060	1.52	0.561	14.25	258	384	440	655
12221.715100*	1/0	19/.0740	0.370	9.40	0.065	1.65	0.060	1.52	0.607	15.42	326	485	505	751
12221.715200*	2/0	19/.0837	0.410	10.41	0.065	1.65	0.060	1.52	0.652	16.56	411	611	615	915
12221.715300*	3/0	19/.0940	0.460	11.68	0.065	1.65	0.060	1.52	0.700	17.78	518	771	747	1111
12221.715400*	4/0	19/.1055	0.520	13.21	0.065	1.65	0.060	1.52	0.760	19.30	653	972	891	1326

Dimensions and weights are nominal; subject to industry tolerances.
* Non-stock item; minimum runs apply. Please contact Customer Service for price and delivery.

UL® LISTED

General Cable
Phone: 888-593-3355
www.generalcable.com