SunGen™

XLPE, Photovoltaic Wire
600V, UL Type PV/USE-2/RHH or RHW-2, 90°C

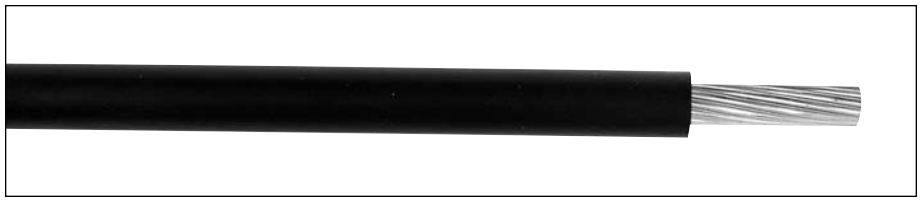

Product Construction:

Conductor:
- 18 AWG thru 2 AWG tinned coated compressed copper. Class C stranding per ASTM B33 and B8
- 1 AWG thru 4/0 AWG tinned coated compressed copper. Class B stranding per ASTM B33 and B8

Insulation:
- Flame-retardant Cross-Linked Polyethylene (XLPE), black

Print:
- 18 AWG and 16 AWG: GENERAL CABLE® (PLANT OF MFG) 600V PV WIRE 90°C WET OR DRY SUN RES (UL) -40°C VW-1 MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK
- 14 AWG thru 4/0 AWG: GENERAL CABLE® (PLANT OF MFG) 600V PV WIRE OR USE-2 OR RHH OR RHW-2 (SIZE) 90° WET OR DRY SUN RES (UL) -40°C VW-1 MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

Options:
- Bare copper conductor
- Other stranding options are available upon request
- Colors available on request

Applications:
- Single conductor, sunlight-resistant, photovoltaic wire rated 90°C wet or dry, 600V for interconnection wiring of grounded and ungrounded photovoltaic power systems as described in Section 690.31(A) and other applicable parts of the National Electrical Code (NEC), NFPA 70

Features:
- Rated 90°C wet and dry
- Deformation-resistant at high temperatures
- Excellent moisture resistance, exceeds UL 44
- Stable electrical properties over a broad temperature range
- Excellent resistance to crush and compression cuts
- Resistant to most oils and chemicals
- UV/sunlight-resistant
- Meets cold bend test at -25°C

Compliances:
Industry Compliances:
- UL 4703 Type PV
- National Electrical Code (NEC)
- ICEA S-95-658/NEMA WC70
- UL 44 Type RHH or RHW-2, UL File # E90494
- UL 854 Type USE-2, UL File # E90499

Flame Test Compliances:
- UL 1581 VW-1
- For sizes 1/0 and larger: IEEE 383, IEEE 1202/CSA FT4

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP
- OSHA Acceptable

Packaging:
- Material cut to length and shipped on non-returnable wood reels

CATALOG NUMBER	COND. SIZE (AWG)	COND. STRAND	NOMINAL COND. O.D.		NOMINAL INSULATION		NOMINAL CABLE O.D.		COPPER WEIGHT		NOMINAL WEIGHT	
			INCHES	mm	INCHES	mm	INCHES	mm	LBS/ 1000 FT	kg/km	LBS/ 1000 FT	kg/km
18 AWG - 4/0 AWG CONDUCTORS												
12411.711800*	18	19/.0092	0.045	1.14	0.060	1.52	0.169	4.29	5	7	14	21
12411.711600*	16	19/.0117	0.056	1.42	0.060	1.52	0.180	4.57	8	12	18	27
12411.711400	14	19/.0142	0.070	1.78	0.060	1.52	0.194	4.93	13	19	27	40
12411.711200	12	19/.0185	0.088	2.23	0.060	1.52	0.214	5.43	20	30	36	54
12411.711100	10	19/.0234	0.112	2.84	0.060	1.52	0.238	6.04	32	48	51	76
12411.710800*	8	19/.0295	0.143	3.63	0.075	1.90	0.305	7.75	50	74	80	119
12411.710600*	6	19/.0372	0.184	4.67	0.075	1.90	0.342	8.69	81	121	115	171
12411.710400*	4	19/.0469	0.234	5.94	0.075	1.90	0.385	9.78	129	192	170	253
12411.710200*	2	19/.0526	0.296	7.52	0.075	1.90	0.453	11.50	205	305	253	376
12411.710100*	1	19/.0664	0.323	8.20	0.095	2.41	0.515	13.08	258	384	333	495
12411.715100*	1/0	19/.0740	0.370	9.40	0.095	2.41	0.563	14.30	326	485	410	610
12411.715200*	2/0	19/.0837	0.410	10.41	0.095	2.41	0.608	15.44	411	611	502	747
12411.715300*	3/0	19/.0940	0.460	11.68	0.095	2.41	0.658	16.71	518	771	620	922
12411.715400*	4/0	19/.1055	0.520	13.21	0.095	2.41	0.714	18.13	653	972	767	1141

Dimensions and weights are nominal; subject to industry tolerances.
* Non-stock item; minimum runs apply. Please contact Customer Service for price and delivery.

UL® LISTED

General Cable
Phone: 888-593-3355
www.generalcable.com