
SunGen™

XLPE, Photovoltaic Wire
2000V, UL Type PV/RHH or RHW-2 or 600V USE-2, 90°C

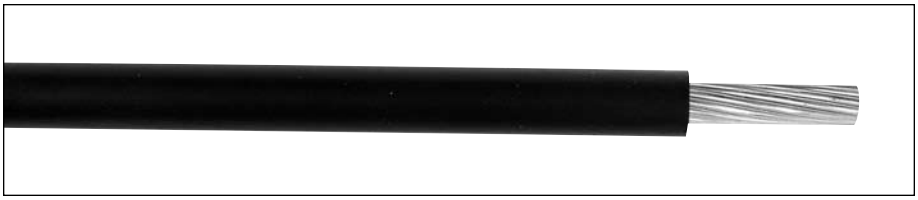

Product Construction:

Conductor:
- 18 AWG thru 2 AWG tinned coated compressed copper. Class C stranding per ASTM B33 and B8
- 1 AWG thru 4/0 AWG tinned coated compressed copper. Class B stranding per ASTM B33 and B8

Insulation:
- Flame-retardant Cross-Linked Polyethylene (XLPE), black

Print:
- 18 AWG and 16 AWG: GENERAL CABLE® (PLANT OF MFG) 2000V PV WIRE (SIZE) 90˚C WET OR DRY SUN RES (UL) -40˚C VW-1 MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK
- 14 AWG thru 4/0 AWG: GENERAL CABLE® (PLANT OF MFG) 2000V PV WIRE OR RHH OR RHW-2 OR 600V USE-2 (SIZE) 90˚C WET OR DRY SUN RES (UL) -40˚C VW-1 MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

Options:
- Bare copper conductor
- Other stranding options are available upon request
- Colors available on request

Applications:
- Single conductor, sunlight-resistant, photovoltaic wire rated 90°C wet or dry, 2000V for interconnection wiring of grounded and ungrounded photovoltaic power systems as described in Section 690.31(A) and other applicable parts of the National Electrical Code (NEC), NFPA 70

Features:
- Rated 90°C wet and dry
- Deformation-resistant at high temperatures
- Excellent moisture resistance, exceeds UL 44
- Stable electrical properties over a broad temperature range

Features (cont'd.):
- Excellent resistance to crush and compression cuts
- Resistant to most oils and chemicals
- UV/sunlight-resistant
- Meets cold bend test at -25°C

Compliances:
Industry Compliances:
- UL 4703 Type PV
- National Electrical Code (NEC)
- ICEA S-95-658/NEMA WC70
- UL 44 Type RHH or RHW-2, UL File # E90494
- UL 854 Type USE-2 for 600V, UL File # E90499

Flame Test Compliances:
- UL 1581 VW-1
- For sizes 1/0 and larger: IEEE 383, IEEE 1202/CSA FT4

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP
- OSHA Acceptable

Packaging:
- Material cut to length and shipped on non-returnable wood reels

CATALOG NUMBER	COND. SIZE (AWG)	COND. STRAND	NOMINAL COND. O.D.		NOMINAL INSULATION		NOMINAL CABLE O.D.		COPPER WEIGHT		NOMINAL WEIGHT	
			INCHES	mm	INCHES	mm	INCHES	mm	LBS/ 1000 FT	kg/km	LBS/ 1000 FT	kg/km
18 AWG - 4/0 AWG CONDUCTORS												
12421.711800*	18	19/.0092	0.045	1.14	0.075	1.90	0.199	5.05	5	7	16	24
12421.711600*	16	19/.0117	0.056	1.42	0.075	1.90	0.210	5.33	8	12	21	31
12421.711400	14	19/.0142	0.070	1.78	0.075	1.90	0.224	5.69	13	19	32	48
12421.711200	12	19/.0185	0.088	2.23	0.075	1.90	0.244	6.20	20	30	42	62
12421.711100	10	19/.0234	0.112	2.84	0.075	1.90	0.268	6.81	32	48	57	85
12421.710800*	8	19/.0295	0.143	3.63	0.085	2.16	0.326	8.28	50	74	87	129
12421.710600*	6	19/.0372	0.184	4.67	0.085	2.16	0.363	9.22	81	121	123	183
12421.710400*	4	19/.0469	0.234	5.94	0.085	2.16	0.406	10.31	129	192	181	269
12421.710200*	2	19/.0526	0.296	7.52	0.085	2.16	0.474	12.04	205	305	266	396
12421.710100*	1	19/.0664	0.323	8.20	0.105	2.67	0.538	13.66	258	384	350	521
12421.715100*	1/0	19/.0740	0.370	9.40	0.105	2.67	0.586	14.88	326	485	429	638
12421.715200*	2/0	19/.0837	0.410	10.41	0.105	2.67	0.631	16.03	411	611	527	784
12421.715300*	3/0	19/.0940	0.460	11.68	0.105	2.67	0.674	17.12	518	771	647	963
12421.715400*	4/0	19/.1055	0.520	13.21	0.105	2.67	0.737	18.72	653	972	796	1184

Dimensions and weights are nominal; subject to industry tolerances.
* Non-stock item; minimum runs apply. Please contact Customer Service for price and delivery.

UL® LISTED

General Cable
Phone: 888-593-3355
www.generalcable.com