
Type TC Power Cable-XHHW

Type TC Power Cable. 600 Volt. Copper Conductors.
XLP Insulated Singles Rated XHHW.
Heat, Moisture, and Sunlight Resistant. Overall PVC Jacket.
RoHS

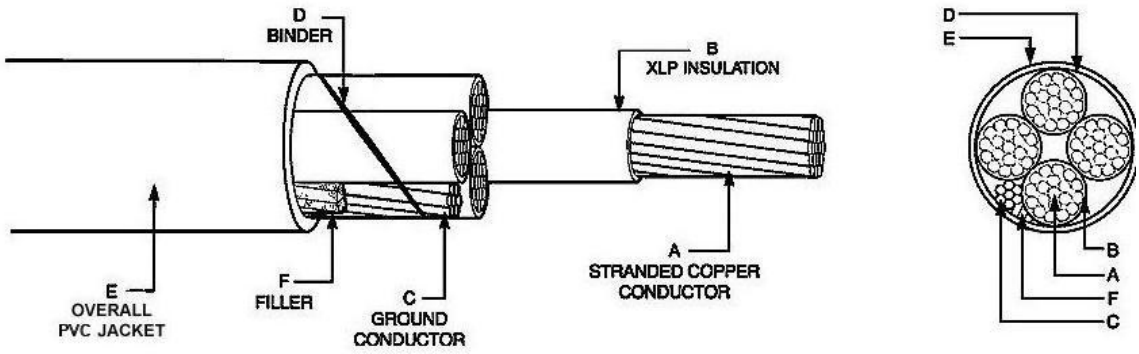

APPLICATIONS

Southwire's Type TC Power Cable is used to supply power to motors, or for connection to other power devices in industrial settings. Primary installations include cable trays, raceways, and outdoor locations where supported by a messenger wire. Type TC Power Cable is listed for direct burial and for use in Class 1, Division 2 hazardous locations and Class 1 control circuits. This cable may be used in wet and dry locations at temperatures not to exceed 90°C.

SPECIFICATIONS

- ASTM
- UL 44, 1277 and 1581
- ICEA S-58-679 Method 4
- UL 1685 - Flame Exposure Test
- ICEA T-29-520 - Vertical Cable Tray Flame Test
- IEEE 383 (IEEE 1202/FT4) - Flame Test
- ICEA S-95-658 (NEMA WC 70) construction requirements

CONSTRUCTION

Southwire's Type TC Power Cable is manufactured using Type XHHW-2 conductors. Individual conductors are bare annealed copper covered with a cross-linked polyethylene (XLP) insulation. The overall jacket consists of a flame retardant, moisture and sunlight resistant PVC jacket. Non-halogen jacket available upon request.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

greenSpec™ RoHS Compliant

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.

4c, XHHW/PVC, GW, Type TC Power Cable

Type TC-Power Cable
Four XLP (XHHW-2) Conductors With Ground

Size (AWG or kcmil)	Stranding	Ground Conductor Size (AWG)	Jacket Thickness (inches)	Avg. Overall Diameter		Approximate Weight		Ampacity
				inches	mm	lbs./1000'	kg./km.	90°C
8	7	10	.060	.747	19	404	601	55
6	7	8	.080	.882	22.4	613	912	75
4	7	8	.080	.917	23.3	802	1193	95
2	7	6	.080	1.054	26.8	1191	1772	130
1	19	6	.080	1.21	30.7	1503	2236	150
1/0	19	6	.080	1.307	33.2	1806	2688	170
2/0	19	6	.080	1.411	35.8	2199	3272	195
3/0	19	4	.080	1.529	38.8	2744	4084	225
4/0	19	4	.110	1.729	43.9	3449	5132	260
250	37	4	.110	1.888	48	4030	5996	290
350	37	3	.110	2.137	54.3	5453	8114	350
500	37	2	.110	2.448	62.2	7562	11252	430

Note: Ampacities are based on Table310.16 of the NEC, 2008 Editon. Ampacities are for general use with a 90°C conductor and 30°C ambient temperature as specified in section 310.15 and in cable trays as specified in section 392.11. The ampacity shall be reduced by a factor of 0.80 when the number of current-carrying conductors exceeds three.
6 and 8 AWG constructions with insulated grounds (standard) and 4 AWG and larger with bare or insulated ground are UL Listed for exposed runs (ER) per NEC 336.10.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

greenSpec™ RoHS Compliant

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.