
CT3-13ET

**15kVU Type MV-105. 3 Copper Conductors.
Thermosetting Conductor and Insulation Shield.
EPR Insulation. Tape Shield.
Copper Ground Wire. PVC Jacket.
RoHS**

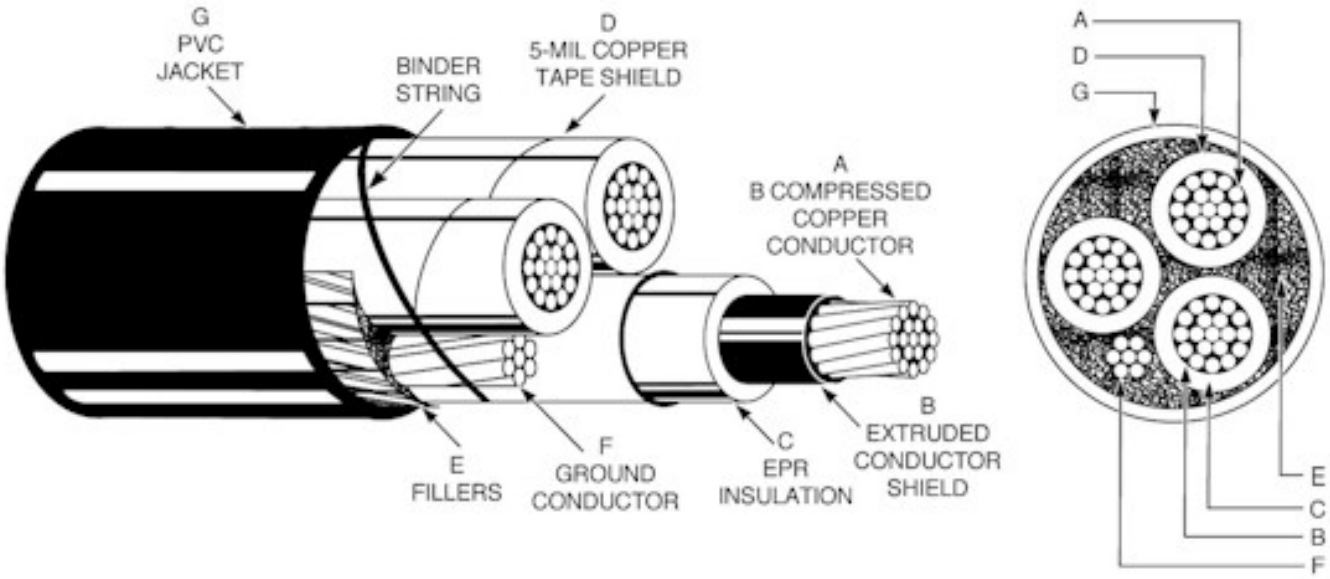

APPLICATIONS

Southwire CT3-13ET Type MV- 105 Cable is for use in aerial installations, direct buried, cable trays, troughs or raceway. These cables are capable of operating continuously at a maximum conductor temperature of 105°C for normal operation, 140°C for emergency overload conditions, and 250°C for short circuit conditions, and are rated at 15,000V, 133% insulation level (ungrounded system). Maximum sidewall pressure is 1000 lbs.

SPECIFICATIONS

Southwire CT3-13ET Type MV-105 Cable is manufactured and tested in accordance with the latest revisions of the following standards and specification:

- UL 1072 and 1685
- ICEA S-93-639 (NEMA WC 74)
- ICEA S-97-682 (when requested)
- AEIC CS-8
- IEEE 1202/FT4 - Flame Test (70,000 Btu/hr Vertical Tray Test) with CPE and Solonon jacket.
- RoHS

CONSTRUCTION

Southwire CT3-13ET Type MV-105 Cable offers heavy duty construction and flexible EPR insulation. For use in cable trays per NEC Article 392. Alternate constructions available. SOLONON™ low smoke, non halogen polyolefin jackets and CPE jackets are available upon request.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN THE USA

greenSpec™
RoHS Compliant

Copyright 2010, Southwire Company.
All Rights Reserved.
®Southwire is a registered trademark of Southwire Company.

CT3-13ET 3c, 15kV, 220mil EPR(133%), TS, GW, PVC, CT Rated

Product Code	Size	Diameter		0.220" (5.59mm) Insulation Diameter		Extruded Insulation Shield Diameter		Grd. Cond. Size	Min. Point Jacket Thickness		Approximate Overall Diameter		Approximate Net Weight		Allowable Ampacities+	
	AWG or kcmil	inch*	mm	inch	mm	inch	mm	AWG	inch	mm	inch	mm	lb./Mft.	kg/km	Duct	Conduit In Air
CT3-13ET-002	2	.283	7.19	.773	19.62	.828	21.02	6	.1	2.54	2.057	52.2	2252	3350	160	165
CT3-13ET-001	1	.322	8.18	.813	20.64	.868	22.03	4	.1	2.54	2.143	54.4	2566	3818	185	185
CT3-13ET-010	1/0	.362	9.19	.853	21.65	.908	23.05	4	.1	2.54	2.229	56.6	2881	4286	210	215
CT3-13ET-020	2/0	.405	10.29	.893	22.67	.948	24.07	4	.1	2.54	2.316	58.8	3244	4827	235	245
CT3-13ET-030	3/0	.456	11.58	.943	23.94	.998	25.34	3	.1	2.54	2.424	61.6	3724	5541	270	280
CT3-13ET-040	4/0	.512	13	.998	25.34	1.053	26.73	3	.1	2.54	2.543	64.6	4283	6373	305	320
CT3-13ET-250	250	.558	14.17	1.053	26.73	1.108	28.13	3	.1	2.54	2.673	67.9	4807	7152	335	350
CT3-13ET-350	350	.661	16.79	1.158	29.4	1.213	30.8	2	.125	3.18	2.953	75	6232	9273	400	430
CT3-13ET-500	500	.79	20.07	1.283	32.58	1.338	33.97	1	.125	3.18	3.223	81.9	8056	11987	485	525
CT3-13ET-750	750	.968	24.59	1.47	37.34	1.525	38.74	1/0	.125	3.18	3.628	92.2	11025	16405	585	635

*Nominal diameter per ASTM Standards.
+Ampacities are based on the NEC, 2008 Edition. Duct ampacities are based on Table 310.79 three conductors within an overall covering in one underground duct, 105°C conductor, 20°C earth ambient temperature. Conduit in air ampacities are based on Table 310.75 three cables within an overall covering in isolated conduit in air, 105°C conductor, 40°C ambient temperature.

Scope: This specification covers three conductor EPR (ethylene propylene rubber) insulated, shielded, thermoplastic jacketed power cables with grounding conductor for use in aerial installations, direct buried, cable trays, troughs, or raceways. These cables are capable of operating continuously at a temperature of 105°C for normal operations, 140°C for emergency overload conditions, and 250°C for short circuit conditions, and are rated at 15,000V, 133% insulation level (ungrounded system).

Standards: The following standards shall form part of this specification - UL Standard 1072 for Medium Voltage Power Cable and ICEA S-93-639 (NEMA WC 74) 5-46 kV Shielded Power Cable for Use in the Transmission & Distribution of Electric Energy.

Conductor: The conductor shall be Class B compressed concentric stranded bare copper in accordance with ASTM B3 and B8 and ICEA Part 2, Section 2.1 and 2.5.

Conductor Shield: The conductor shall be shielded with an extruded semi-conducting thermosetting polymeric layer, which shall be firmly bonded to the insulation. The thickness shall be in accordance with the referenced standards.

Insulation: The insulation shall be EPR (ethylene propylene rubber) meeting the requirements of the referenced standards. The nominal thickness shall be 0.220".

Insulation Shield: The insulation shall be shielded with an extruded semi-conducting thermosetting polymeric layer which shall be identified as semi-conducting. Over this layer shall be applied a helically wrapped 5-mil copper tape with 25% overlap. The method of phase identification will be similar to ICEA Method 3, using printed circuit numbers and colors (1-BLACK, 2-RED, 3-BLUE).

Grounding Conductor: The ground conductor shall be Class B compressed concentric stranded bare copper in accordance with ASTM B3 and B8.

Assembly: The insulated and shielded power conductors shall be cabled round with fillers and with a grounding conductor in one outer interstice and covered with a binder tape.

Jacket: The cable shall be covered with a black PVC jacket conforming to the requirements specified for polyvinyl chloride in ICEA. The average thickness shall be in accordance with the referenced standards. The jacket will be sunlight resistant and will meet the requirements of UL 1685 - UL Flame Exposure Test. Optional SOLONON low smoke, non halogen polyolefin jackets and CPE jackets are available upon request.

Tests: Qualification tests shall be conducted in accordance with the requirements of AEIC.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

greenSpec™
RoHS Compliant

Copyright 2010, Southwire Company. All Rights Reserved.
®Southwire is a registered trademark of Southwire Company.