
HLX02XXH

ARMOR-X and ARMOR-XTRA. -HL. 600 Volt Type MC-HL Control. XLP Insulated, 90°C. Continuous Corrugated Aluminum Armor with -40°C PVC Jacket.
Rohs

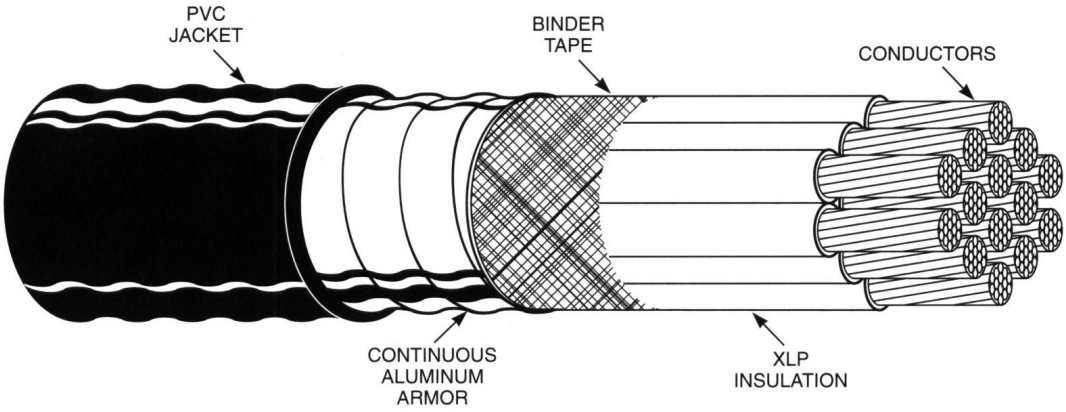

APPLICATIONS

Southwire's 600 Volt HLX02XXH ARMOR-X and ARMOR-XTRA Type MC-HL Control Cable provides an impervious sheath recommended as an economical alternative to traditional conduit systems. For use in aerial installations, direct burial, concrete-encased installations, cable trays, troughs or continuous rigid cable supports. For use in Classes I, II and III, Division 1 and 2, hazardous locations covered under NEC Articles 501, 502 and 503. These cables are capable of operating continuously in wet or dry locations at a maximum conductor temperature of 90°C for normal operation, 130°C for emergency overload conditions, and 250°C for short circuit conditions. Maximum sidewall pressure is 1000 lbs.

STANDARDS

Southwire's 600 Volt HLX02XXH ARMOR-X and ARMOR-XTRA Type MC-HL Control Cable is manufactured and tested in accordance with the latest revisions of:

- UL 44, 1569, 1309 and 2225
- ABS Listed as CWCMC.
- IEEE 1580 and 1202
- IEC 60332-3-22 and 60092-350
- ICEA T-29-520, S-58-679 and S-95-658 (NEMA WC 70) construction requirements
- CSA C.22.2 No.123 & 239
- RoHS

CONSTRUCTIONS

Southwire's 600 Volt HLX02XXH ARMOR-X or ARMOR-XTRA Type MC-HL continuous corrugated aluminum armor provides an aluminum sheath impervious to moisture, liquids and gases. Cable is flame retardant UL-listed for cable tray use, direct burial, sunlight resistant and minus 40°C installation temperature. Continuous aluminum sheath meets the grounding requirements of NEC 250-122 in non-HL locations. Conductors are UL-listed Type XHHW-2 with phase identification.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.

HLX02XXH XHHW Control, GW, Cont. Alum. Weld. Armor,

Product Code	Conductors	Grounds No. x AWG	Approx. Core Diameter		Approx. ARMOR-X Diameter		Jacket Thickness		Approx. Overall Diameter		Approx. Net Weight		Allowable Ampacity+
	No. x AWG		inch	mm	inch	mm	inch	mm	inch	mm	lb./mft.	kg/km	90°C
HLX01-XXH-14/2	2 x 14	1 x 14	0.30	7.6	0.495	13	0.06	1.5	0.595	15.1	180	268	25
HLX01-XXH-14/3	3 x 14	1 x 14	0.34	8.6	0.495	13	0.06	1.5	0.595	15.1	210	313	25
HLX01-XXH-14/3/P	3 x 14	3 x 18	0.30	7.6	0.495	13	0.06	1.5	0.595	15.1	197	293	25
HLX01-XXH-14/4	4 x 14	1 x 14	0.37	9.4	0.545	14	0.06	1.5	0.645	16.4	241	359	20
HLX01-XXH-14/4/P	4 x 14	3 x 18	0.34	8.6	0.545	14	0.06	1.5	0.645	16.4	225	335	20
HLX01-XXH-14/6	6 x 14	1 x 14	0.41	10	0.625	16	0.06	1.5	0.735	18.4	278	414	20
HLX01-XXH-14/8	8 x 14	1 x 14	0.49	12	0.670	17	0.06	1.5	0.770	19.6	337	502	17
HLX01-XXH-14/11	11 x 14	1 x 14	0.56	14	0.795	20	0.06	1.5	0.895	22.7	412	613	12
HLX01-XXH-14/18	18 x 14	1 x 14	0.67	17	0.910	23	0.06	1.5	1.01	25.7	557	829	12
HLX01-XXH-14/36	36 x 14	1 x 14	0.93	24	1.22	31	0.06	1.5	1.32	33.5	987	1469	10
HLX01-XXH-12/2	2 x 12	1 x 12	0.34	8.6	0.495	13	0.06	1.5	0.595	15.1	215	320	30
HLX01-XXH-12/3	3 x 12	1 x 12	0.38	10	0.545	14	0.06	1.5	0.645	16.4	255	379	30
HLX01-XXH-12/3/P	3 x 12	3 x 16	0.34	8.6	0.545	14	0.06	1.5	0.645	16.4	242	360	30
HLX01-XXH-12/4	4 x 12	1 x 12	0.42	11	0.575	15	0.06	1.5	0.675	17.1	296	441	24
HLX01-XXH-12/4/P	4 x 12	3 x 16	0.38	10	0.575	15	0.06	1.5	0.675	17.1	279	415	24
HLX01-XXH-12/6	6 x 12	1 x 12	0.47	12	0.670	17	0.06	1.5	0.770	19.6	350	521	24
HLX01-XXH-12/8	8 x 12	1 x 12	0.56	14	0.745	19	0.06	1.5	0.845	21.4	435	647	21
HLX01-XXH-12/11	11 x 12	1 x 12	0.67	17	0.88	22	0.06	1.5	0.98	24.9	513	763	15
HLX01-XXH-12/18	18 x 12	1 x 12	0.82	21	1.06	27	0.06	1.5	1.16	29.5	730	1086	15
HLX01-XXH-12/36	36 x 12	1 x 12	1.13	29	1.42	36	0.06	1.5	1.52	38.6	1315	1957	12
HLX01-XXH-10/2	2 x 10	1 x 10	0.41	10	0.575	15	0.06	1.5	0.675	17.1	258	384	40
HLX01-XXH-10/3	3 x 10	1 x 10	0.46	12	0.65	17	0.06	1.5	0.75	19.1	310	461	40
HLX01-XXH-10/3P	3 x 10	3 x 14	0.39	10	0.60	15	0.06	1.5	0.72	18.3	308	458	40
HLX01-XXH-10/4	4 x 10	1 x 10	0.51	13	0.70	18	0.06	1.5	0.80	20.3	356	530	32
HLX01-XXH-10/4/P	4 x 10	3 x 14	0.44	11	0.64	16	0.06	1.5	0.76	19.3	358	533	32
HLX01-XXH-10/6	6 x 10	1 x 10	0.57	14	0.79	20	0.06	1.5	0.89	22.6	450	670	32
HLX01-XXH-10/8	8 x 10	1 x 10	0.67	17	0.88	22	0.06	1.5	0.98	24.9	555	826	28
HLX01-XXH-10/11	11 x 10	1 x 10	0.77	20	1.06	27	0.06	1.5	1.12	28.4	700	1042	20

Ampacities shown are for general use as specified by the NEC, 2008 Edition, Section 310.15, Table 310.16 90°C. Ampacities for more than three current-carrying conductors are adjusted as required by Notes to Ampacity Tables of 0 to 2000 volts.
*one insulated green ground or three bare grounds.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.

HLX02XXH XHHW Control, GW, Cont. Alum. Weld. Armor,

SCOPE: This specification covers multiconductor XLP (cross-linked polyethylene) insulated, continuous corrugated aluminum armored, thermoplastic jacketed, 600-Volt cable for use in aerial installations, metal racks, cable trays, troughs or continuous rigid cable supports. The cable will be listed Type MC-HL for Classes I, II and III, Division 1 and 2, hazardous locations. This cable is capable of operation continuously at a conductor temperature of 90°C in wet or dry locations.

STANDARDS: The following standards will form part of this specification - ASTM B8, ICEA S-95-658/NEMA WC70, UL 44 and UL 1569.

CONDUCTOR: The conductor will be Class B compressed concentric stranded bare copper in accordance with ASTM B3 and B8 and ICEA.

INSULATION: The insulation will be XLP meeting the requirements of the referenced standards. The insulation thickness will be listed in ICEA, and the minimum spot thickness will not be less than 90% of the listed amounts. Individual conductors will be color coded using colors for the insulation per ICEA S-58-679, Method 1, Table 2.

ASSEMBLY: The insulated conductors will be cabled round with fillers and covered with a binder tape. Assembly will include a green insulated ground wire or three bare grounds.

ARMOR: Continuous corrugated copper-free aluminum sheath shall be applied over the assembly. The continuous sheath will be impervious to moisture, liquids and gases.

JACKET: The cable will be covered with a black PVC jacket conforming to the requirements specified for polyvinyl chloride in ICEA. The average thickness will be in accordance with ICEA, and the minimum spot thickness will not be less than 80% of the average thickness. The jacket will be sunlight resistant and will meet the requirements of the IEEE 1202 (70,000 Btu/hr) and ICEA T-29-520 (210,000 Btu/hr) vertical cable tray flame tests and will be suitable for use at a minimum ambient temperature of minus 40°C.

IDENTIFICATION: Manufacturer's identification will be printed on the jacket.

TESTS: Physical and electrical tests will be conducted in accordance with the requirements of the referenced standards.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN THE USA

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.