
HLX07ENS

2.4kV. Non-Shielded Type MV-105 or MC.
ARMOR-X.®HL. EPR Insulated, 90°C.
Three Bare Copper Grounding Conductors.
Continuous Corrugated Aluminum Armor with -40°C PVC Jacket.
Limited to 2,400 Volts Maximum.

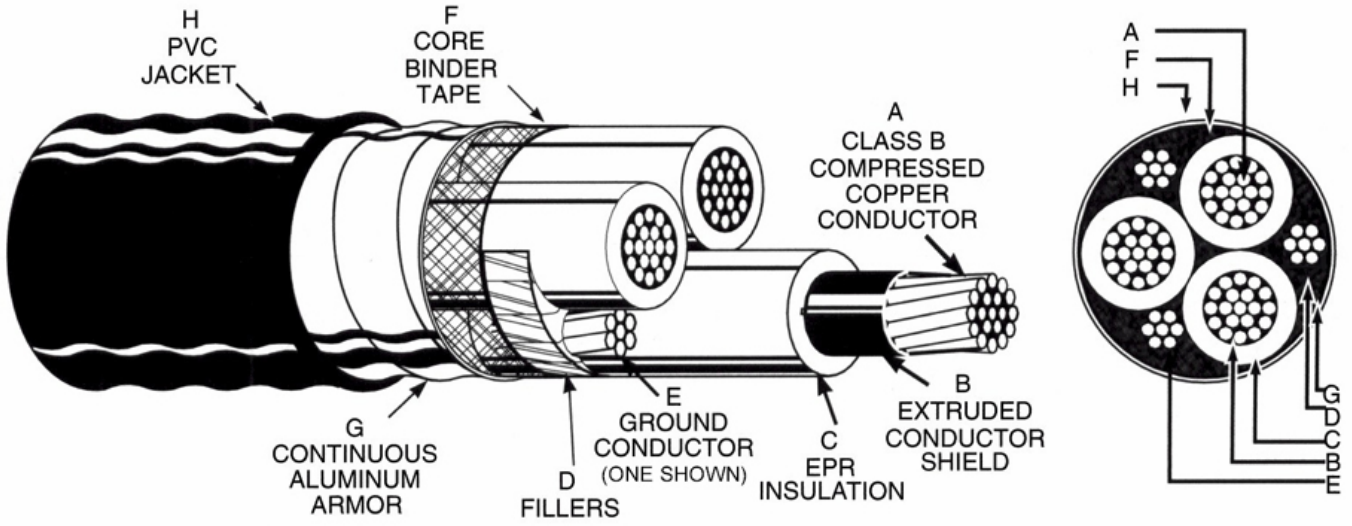

APPLICATIONS

Southwire HLX07ENS ARMOR-X Type MV-105 or MC Cable provides an impervious sheath recommended as an economical alternative to traditional conduit systems. For use in aerial installations, direct burial, concrete-encased installations, cable trays, troughs or continuous rigid cable supports. For use in Classes I, II,III, Divisions 1 and 2, hazardous locations covered under NEC Articles 501, 502, and 503. These cables are capable of operating continuously in wet or dry locations at a maximum conductor temperature of 90°C for normal operation, 130°C for emergency overload conditions, and 250°C for short circuit conditions, and are rated at 2,400V in wet or dry locations. Maximum sidewall pressure is 1000 lbs.

STANDARDS

Southwire HLX07ENS ARMOR-X Type MV-105 or MC-HL Cable is manufactured and tested in accordance with the latest revisions of:

- ICEA S-96-659 (NEMA WC 71) and T-29-520
- UL 1072 and 1309
- UL 2225 - Safety Metal-Clad Cables and Cable-Sealing Fittings for Use in Hazardous (Classified) Locations.
- IEEE 1202(70,000 Btu/hr. Vertical Tray Test).
- ABS Listed as CWCMC
- RoHS

FEATURES

Southwire's HLX07ENS ARMOR-X Type MV-105 or MC-HL continuous corrugated aluminum armor provides a sheath impervious to moisture, liquids, and gases. Cable is flame retardant UL-listed for cable tray use, direct burial, sunlight, oil resistant and minus 40°C installation temperatures. Continuous aluminum sheath meets the grounding requirements of NEC 250-122. Cable is constructed with an extruded conductor shield and flexible EPR insulation. SOLONON™ low smoke, non halogen polyolefin jackets are available upon request.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

greenSpec™
RoHS Compliant

MADE IN ★ THE USA

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.

HLX07ENS 3c, EPR, N/S, 3xGW, Cont. Alum. Weld. Armor,

Product Code	Size	Conductor Diameter		0.090" (3.30mm) Insulation Diameter		Gnd. Cond. Size	Approx. ARMOR-X Diameter		Jacket Thickness		Approx. Overall Diameter		Approx. Net Weight		Allowable Ampacities+	
	AWG or kcmil	inch	mm	inch	mm	No. x AWG	inch	mm	inch	mm	inch	mm	lbs/Mft.	kg/km	Duct Burial	In Air
XAL07ENS-006	6	.174	4.43	.401	10.2	3 x 10	1.22	31	.05	1.27	1.32	33.5	838	1248	105	79
XAL07ENS-004	4	.225	5.72	.45	11.4	3 x 10	1.35	34.3	.05	1.27	1.45	36.8	1071	1594	135	105
XAL07ENS-002	2	.277	7.04	.505	12.8	3 x 10	1.47	37.3	.05	1.27	1.57	39.9	1390	2069	180	140
XAL07ENS-010	1/0	.362	9.19	.587	14.9	3 x 8	1.59	40.4	.06	1.52	1.71	43.4	1920	2857	230	185
XAL07ENS-020	2/0	.405	10.29	.629	16	3 x 8	1.76	44.7	.06	1.52	1.88	47.8	2243	3337	260	215
XAL07ENS-040	4/0	.512	13	.736	18.7	3 x 6	2.04	51.8	.06	1.52	2.16	54.9	3287	4891	335	285
XAL07ENS-250	250	.558	14.17	.791	20.1	3 x 6	2.2	55.9	.06	1.52	2.32	58.9	3688	5488	365	320
XAL07ENS-350	350	.661	16.79	.893	22.7	3 x 6	2.43	61.7	.075	1.91	2.58	65.5	4961	7382	440	395
XAL07ENS-500	500	.79	20.07	1.021	25.9	3 x 4	2.67	67.8	.075	1.91	2.82	71.6	6652	9898	530	485
XAL07ENS-750	750	.968	24.59	1.208	30.7	3 x 4	3.2	81.3	.085	2.16	3.37	85.6	9700	14434	650	615

+Ampacities are based on the NEC, 2011 Edition. Direct burial ampacities are based on table 310.83 three-conductors within an overall covering directly buried, 90°C conductor, 20°C earth ambient temperature. In air ampacities are based on table 310.71 three-conductors within an overall covering in free air, 90°C conductor, 40°C ambient temperature.

SCOPE: This specification covers three-conductor EPR (ethylene propylene rubber) insulated, non-shielded, continuous corrugated aluminum armored, thermoplastic jacketed power cables with grounding conductor for use in aerial installations, direct burial, concrete-encased installation, cable trays, troughs, or continuous rigid cable supports. For use in Classes I and II, III, Divsion 1 and 2, hazardous locations covered under NEC Articles 501,502, and 503. These cables are capable of operating continuously at a maximum temperature of 90°C for normal operations, 130°C for emergency overload conditions, and 250°C for short circuit conditions, and are rated 2,400 volts in wet or dry locations.

STANDARDS: The following standards will form part of this specification: UL Standard 1072 for Medium Voltage Power Cable and ICEA S-93-639 (NEMA WC74) 5-46 kV Shielded Power Cable for Use in the Transmission and Distribution of Electric Energy.

CONDUCTOR: The conductor will be Class B compressed concentric stranded bare copper in accordance with ASTM B3 and B8 and ICEA.

CONDUCTOR SHIELD: The conductor will be shielded with an extruded semiconducting thermosetting polymeric layer, which will be firmly bonded to the insulation. The thickness will be in accordance with the referenced standards.

INSULATION: The insulation will be EPR (ethylene propylene rubber) meeting the requirements of the referenced standards. The average thickness will be 0.090" and the minimum spot thickness will be not less than 90% of the average thickness.

GROUNDING CONDUCTOR: The three ground conductors shall be Class B compressed concentric stranded bare copper in accordance with ASTM B3 and B8.

ASSEMBLY: The insulated power conductors will be cabled round with fillers and with three grounding conductors in the outer interstices and covered with a binder tape.

ARMOR: Continuous, impervious, welded, copper-free corrugated aluminum armor will be applied over the assembly.

JACKET: The cable will be covered with a yellow PVC jacket conforming to the requirements specified for polyvinyl chloride in ICEA. The average thickness will be in accordance with the referenced standards and the minimum spot thickness will be not less than 80% of the average thickness. The jacket will be sunlight resistant and will meet the requirements of the IEEE 1202 (70,000 Btu/hr.) and ICEA T-29-520 (210,000 Btu/hr.) vertical cable tray flame tests. The PVC jacket will be suitable for use at a minimum ambient temperature of minus 40°C. Optional SOLONON low smoke, non halogen polyolefin jackets are available upon request

IDENTIFICATION: Manufacturer's identification will be printed on the jacket.

TESTS: Physical and electrical tests will be conducted in accordance with the requirements of the referenced standards .

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

greenSpec™ RoHS Compliant

MADE IN ★ THE USA

Copyright 2010, Southwire Company. All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.