
XAL01XXH

ARMOR-X and ARMOR-XTRA . 600 Volt Type MC Control. XLP Insulated, 90°C. Continuous Corrugated Aluminum Armor with -40°C PVC Jacket.

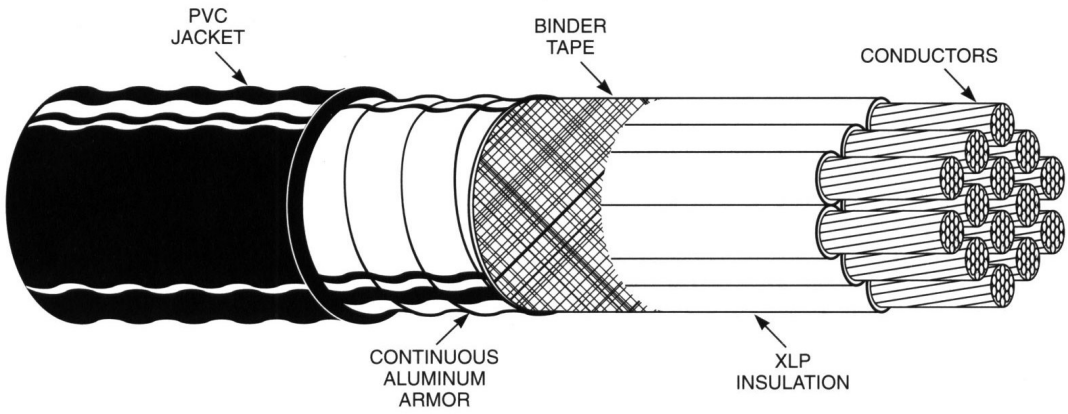

APPLICATIONS

Southwire's 600 Volt XAL01XXH ARMOR-X and ARMOR-XTRA Type MC Control Cable provides an impervious sheath recommended as an economical alternative to traditional conduit systems. For use in aerial installations, direct burial, concrete-encased installations, cable trays, troughs or continuous rigid cable supports. For use in Classes I and II, Division 2 and Class III, Divisions 1 and 2, hazardous locations covered under NEC Articles 501, 502 and 503. These cables are capable of operating continuously in wet or dry locations at a maximum conductor temperature of 90°C for normal operation, 130°C for emergency overload conditions, and 250°C for short circuit conditions. Maximum sidewall pressure is 1000 lbs.

STANDARDS

Southwire's 600 Volt XAL01XXH ARMOR-X and ARMOR-XTRA Type MC Control Cable is manufactured and tested in accordance with the latest revisions of:

- UL 44 - Thermoset-Insulated Wires and Cables.
- UL 1569 - Metal-Clad Cables.
- UL 1309 - Listed as Marine Shipboard Cable.
- IEEE 1202 - Flame Testing of Cables for Use in Cable Tray in Industrial and Commercial Occupancies (70,000 Btu/hr).
- ICEA T-29-520 - Vertical Cable Tray Flame Tests (210,000 Btu/hr).
- ICEA S-58-679 - Control Cable Conductor Identification.
- ICEA S-95-658 (NEMA WC 70) construction requirements.
- RoHS

CONSTRUCTIONS

Southwire's 600 Volt XAL01XXH ARMOR-X and ARMOR-XTRA Type MC continuous corrugated aluminum armor provides an aluminum sheath impervious to moisture, liquids and gases. Cable is flame retardant UL-listed for cable tray use, direct burial, sunlight resistant and minus 40°C installation temperatures. Continuous aluminum sheath meets the grounding requirements of NEC 250-122 in non-HL locations. Conductors are UL-listed Type XHHW-2 with phase identification. Non-halogen jacket is available upon request.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN THE USA
greenSpec™ RoHS Compliant
Copyright 2010, Southwire Company. All Rights Reserved.
®Southwire is a registered trademark of Southwire Company.

XAL01XXH XHHW Control, Cont. Alum. Weld. Armor, Armor-X

Product Code	Size	No. of Cond.	Approx. Core Diameter		Approx. ARMOR-X Diameter		Jacket Thickness		Approximate Overall Diameter		Approximate Net Weight		Allowable Ampacities
	AWG or kcmil		inch	mm	inch	mm	inch	mm	inch	mm	lb./Mft.	kg/km	90°C
XAL01-XXH-14/3	14	3	.29	7.4	.52	13.2	.05	1.27	.62	15.7	160	238	25
XAL01-XXH-14/4	14	4	.33	8.3	.56	14.2	.05	1.27	.66	16.8	187	278	20
XAL01-XXH-14/5	14	5	.37	9.3	.6	15.2	.05	1.27	.7	17.8	214	318	20
XAL01-XXH-14/7	14	7	.41	10.3	.63	15.9	.05	1.27	.73	18.4	255	379	17
XAL01-XXH-14/9	14	9	.5	12.7	.74	18.8	.05	1.27	.84	21.3	317	472	17
XAL01-XXH-14/12	14	12	.57	14.5	.83	21.1	.05	1.27	.93	23.6	386	574	12
XAL01-XXH-14/19	14	19	.65	16.4	.91	23.1	.05	1.27	1.01	25.7	528	786	12
XAL01-XXH-14/37	14	37	.96	24.5	1.3	33	.05	1.27	1.4	35.6	962	1432	10
XAL01-XXH-12/3	12	3	.33	8.3	.56	14.2	.05	1.27	.66	16.8	194	288	30
XAL01-XXH-12/4	12	4	.37	9.3	.6	15.2	.05	1.27	.7	17.8	229	341	24
XAL01-XXH-12/5	12	5	.41	10.3	.64	16.3	.05	1.27	.74	18.8	266	396	24
XAL01-XXH-12/7	12	7	.45	11.4	.69	17.5	.05	1.27	.79	20.1	327	487	21
XAL01-XXH-12/9	12	9	.57	14.5	.75	18.9	.05	1.27	.85	21.5	396	589	21
XAL01-XXH-12/12	12	12	.65	16.4	.91	23.1	.05	1.27	1.01	25.7	504	750	15
XAL01-XXH-12/19	12	19	.74	18.9	1.01	25.7	.05	1.27	1.11	28.2	716	1065	15
XAL01-XXH-12/37	12	37	1.09	27.6	1.43	36.3	.05	1.27	1.53	38.9	1307	1945	12
XAL01-XXH-10/3	10	3	.37	9.3	.6	15.2	.05	1.27	.7	17.8	242	360	40
XAL01-XXH-10/4	10	4	.41	10.3	.63	15.9	.05	1.27	.73	18.4	295	439	32
XAL01-XXH-10/5	10	5	.45	11.4	.69	17.5	.05	1.27	.79	20.1	349	520	32
XAL01-XXH-10/7	10	7	.53	13.4	.75	18.9	.05	1.27	.85	21.5	432	644	28
XAL01-XXH-10/9	10	9	.65	16.4	.91	23.1	.05	1.27	1.01	25.7	556	827	28
XAL01-XXH-10/12	10	12	.74	18.9	1.01	25.7	.05	1.27	1.11	28.2	691	1029	20

Ampacities shown are for general use as specified by the NEC, 2011 Edition, Section 310.15, Table 310.16 90°C. Ampacities for more than three current-carrying conductors are adjusted as required by Note 8 from Notes to Ampacity Tables of 0 to 2000 volts.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

greenSpec™ RoHS Compliant

Copyright 2010, Southwire Company. All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.

XAL01XXH XHHW Control, Cont. Alum. Weld. Armor, Armor-X

SCOPE: This specification covers multiconductor XLP (cross-linked polyethylene) insulated, continuous corrugated aluminum armored, thermoplastic jacketed, 600-Volt cable for use in aerial installations, metal racks, cable trays, troughs or continuous rigid cable supports. This cable is capable of operation continuously at a conductor temperature of 90°C in wet or dry locations.

STANDARDS: The following standards will form part of this specification - ASTM B8, ICEA S-95-658/NEMA WC70, UL 44 and UL 1569.

CONDUCTOR: The conductor will be Class B compressed concentric stranded bare copper in accordance with ASTM B3 and B8 and ICEA.

INSULATION: The insulation will be XLP meeting the requirements of the referenced standards. The insulation thickness will be as listed in ICEA, and the minimum spot thickness will not be less than 90% of the listed amounts. Individual conductors will be color coded using base colors for the insulation with colored tracers per ICEA S-58-679, Method 1, Table 2.

ASSEMBLY: The insulated conductors will be cabled round with fillers and covered with a binder tape.

ARMOR: Continuous, impervious, welded, corrugated copper-free aluminum armor shall be applied over the assembly.

JACKET: The cable will be covered with a black PVC jacket conforming to the requirements specified for polyvinyl chloride in ICEA. The average thickness will be in accordance with ICEA, and the minimum spot thickness will be not less than 80% of the average thickness. The jacket will be sunlight resistant and will meet the requirements of the IEEE 1202 (70,000 Btu/hr) and ICEA T-29-520 (210,000 Btu/hr) vertical cable tray flame tests. The PVC jacket will be suitable for use at a minimum ambient temperature of -40°C. Optional non-halogen jacket available.

IDENTIFICATION: A manufacturer's identification will be printed on the jacket.

TESTS: Physical and electrical tests will be conducted in accordance with the requirements of the referenced standards.

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.