
CSA Teck 90 Power Cable

1000 V Multiconductor, Teck 90 Cable
8 and larger AWG, XLP insulation
Aluminum Interlocked Armor
Inner and Outer PVC jackets
Rated HL (Hazardous Locations)
600V UL Type MC

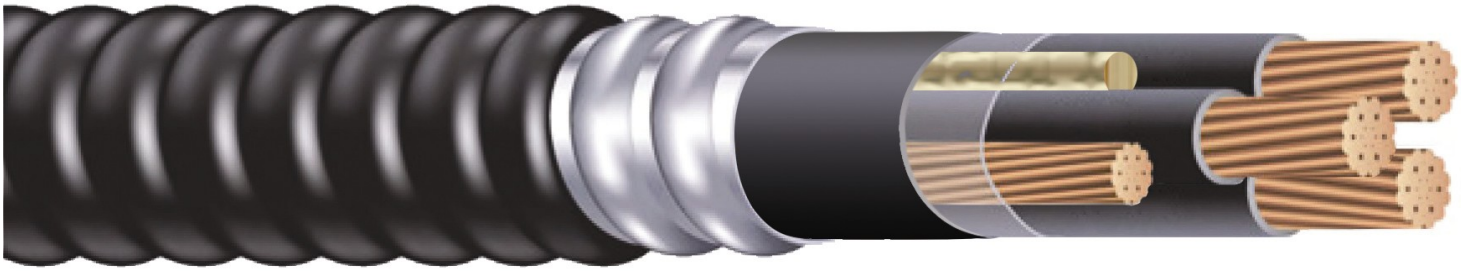

HOW IT'S USED

For exposed or concealed wiring in wet or dry locations. For use in ventilated, non-ventilated and ladder type cable troughs and ventilated flexible cableway in wet or dry locations. Cable is sunlight resistance. Typical applications are for power, lighting and control circuits in: pulp and paper mills, steel mills, food processing plants, commercial centers, mines, generating stations, refineries, industrial plants and chemical plants.

HOW IT'S MADE

- CONDUCTOR: Class B stranded, bare, soft copper
- INSULATION: Cross-Linked Polyethylene (XLP) as approved by CSA on Types RW90 XLP -40°C per CSA C22.2, No. 131; LL90458, color code: 2/C black, white; 3/C red, black, blue; 4/C red, black, blue, white; more than 4/C numbered
- GROUNDING CONDUCTOR: An uninsulated Class B stranded grounding conductor is included in the cable assembly
- ASSEMBLY: Multiple conductor cables are assembled with suitable fillers and binder tape
- INNER JACKET: Polyvinyl Chloride (PVC) heat, flame and moisture-resistant jacket, rated -40°C
- ARMOR: Aluminum interlocking armor
- OVERALL JACKET: Polyvinyl Chloride (PVC) heat, flame and moisture-resistant jacket, rated -40°C, the standard color is black but colored jackets will be provided on request meets Flame Test in accordance with Ontario Hydro Spec. L-891 SM-77, meets Flame Test in IEEE 383 and FT-4 or better. Sunlight Resistant.
- AMPACITY: Based on not more than three conductors in raceway or cable at an ambient temperature of 30°C per Table 2, Column 4 of the Canadian Electrical Code, these ampacities are also based on a minimum one cable O.D. spacing between adjacent cables, (for a four conductor cable the fourth conductor is considered to be the neutral of a three-phase, 4-wire-system)
- TEMPERATURE: -40°C to 90°C
- VOLTAGE: 1000 V CSA 600V UL
- UL Listed for direct burial 90°C and sunlight resistant

HOW IT'S CERTIFIED

Southwire's Teck 90 Power Cable meets CSA C22.2, No. 131 and UL 1569.

Southwire
5729 Main Street
Stouffville Ontario,
Canada L4A 2T1

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.

CSA Teck90 Power Cable

Stock Number	Size	No. Of Conds.	Ground Wiring	Approx. Diameter Inner Jacket (in.)	Approx. Diameter Armor (in)	Approx. Diameter Outer Jacket (in)	Amapcity 30°C Ambient (amps)			Approx. Wt. lb/1,000 ft
							60°C	75°C	90°C	
561963	8	3	10	0.627	0.837	0.917	40	45	45	466
561964	8	4	10	0.685	0.895	0.975	40	45	45	553
561965	6	3	8	0.768	1.088	1.168	55**	65	65	707
561966	6	4	8	0.883	1.203	1.283	55**	65	65	888
561967	4	3	8	0.907	1.227	1.308	70	85	85	958
561968	4	4	8	0.994	1.314	1.394	70	85	85	1,144
561970	3	3	6	0.965	1.285	1.365	80	100	105	1,140
561971	3	4	6	1.058	1.378	1.458	80	100	105	1,351
561972	2	3	6	1.030	1.350	1.430	100	115	120	1,305
561973	2	4	6	1.131	1.451	1.531	100	115	120	1,574
561974	1	3	6	1.211	1.531	1.629	110	130	140	1,642
561975	1	4	6	1.333	1.653	1.751	110	130	140	2,009
561976	1/0	3	6	1.295	1.615	1.713	125	150	155	1,913
561978	1/0	4	6	1.427	1.747	1.845	125	150	155	2,351
561948	2/0	3	6	1.390	1.710	1.808	145	175	185**	2,255
561949	2/0	4	6	1.533	1.863	1.962	145	175	185**	2,848
561950	3/0	3	4	1.498	1.818	1.916	165	200	210	2,695
561952	3/0	4	4	1.654	1.984	2.082	165	200	210	3,412
561953	4/0	3	4	1.619	1.949	2.047	195	230	235	3,268
561954	4/0	4	4	1.849	2.179	2.277	195	230	235	4,212
561955	250	3	4	1.826	2.156	2.254	215	255	265	3,885
561956	250	4	4	2.013	2.343	2.464	215	255	265	4,878
561957	300	3	4	1.940	2.270	2.391	240	285	295	4,509
561958	300	4	4	2.141	2.471	2.592	240	285	295	5,636
561959	350	3	3	2.048	2.378	2.499	260	310	325	5,119
561960	350	4	3	2.262	2.592	2.712	260	310	325	6,416
561961	500	3	3	2.327	2.657	2.777	320	380	395	6,802
561962	500	4	3	2.573	2.903	3.024	320	380	395	8,602

Southwire
5759 Main Street
Stouffville Ontario,
Canada L4A 2T1

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark
of Southwire Company.