
PVIC®

PVC/PVC, Instrumentation, Shielded
300V, UL Type PLTC/ITC, Overall Shielded Pairs/Triads

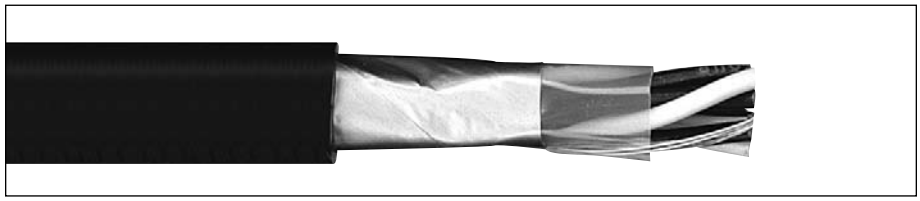

CATALOG NUMBER	NO. OF PAIRS/ TRIADS	COND. SIZE (AWG)	COND. STRAND	MINIMUM AVG. INSULATION THICKNESS		MINIMUM AVG. JACKET THICKNESS		NOMINAL CABLE O.D.		COPPER WEIGHT		NET WEIGHT	
				INCHES	mm	INCHES	mm	INCHES	mm	LBS/ 1000FT	kg/km	LBS/ 1000FT	kg/km
OVERALL SHIELDED PAIRS/TRIADS 20 AWG CONDUCTORS													
325900	1	20	7/.0121	0.012	0.30	0.040	1.02	0.220	5.59	9	13	28	42
325910	1 TRI	20	7/.0121	0.012	0.30	0.040	1.02	0.241	6.12	12	18	34	51
325920	2	20	7/.0121	0.012	0.30	0.040	1.02	0.255	6.48	17	25	41	60
325940	4	20	7/.0121	0.012	0.30	0.042	1.07	0.321	8.15	30	45	65	97
339620*	8	20	7/.0121	0.012	0.30	0.050	1.27	0.475	12.07	54	80	104	154
348090*	12	20	7/.0121	0.012	0.30	0.050	1.27	0.545	13.84	83	124	195	290
334630*	16	20	7/.0121	0.012	0.30	0.050	1.27	0.605	15.37	107	159	248	369
348100*	20	20	7/.0121	0.012	0.30	0.060	1.52	0.650	16.51	135	201	309	460
759610*	24	20	7/.0121	0.012	0.30	0.060	1.52	0.740	18.80	153	228	376	559
339650*	36	20	7/.0121	0.012	0.30	0.060	1.52	0.850	21.59	238	354	530	789
339660*	50	20	7/.0121	0.012	0.30	0.070	1.78	0.970	24.64	330	491	713	1061
OVERALL SHIELDED PAIRS/TRIADS 18 AWG CONDUCTORS													
325830	1	18	7/.0152	0.015	0.38	0.040	1.02	0.240	6.10	12	18	35	52
325840	1 TRI	18	7/.0152	0.015	0.38	0.040	1.02	0.264	6.71	18	27	44	66
325850	2	18	7/.0152	0.015	0.38	0.042	1.07	0.325	8.26	25	37	55	82
325880	4	18	7/.0152	0.015	0.38	0.042	1.07	0.357	9.07	46	68	90	133
348020*	8	18	7/.0152	0.015	0.38	0.060	1.52	0.646	16.41	87	129	192	285
348030*	12	18	7/.0152	0.015	0.38	0.060	1.52	0.670	17.02	129	192	293	436
348040*	16	18	7/.0152	0.015	0.38	0.060	1.52	0.750	19.05	171	254	374	556
339670*	20	18	7/.0152	0.015	0.38	0.060	1.52	0.780	19.81	211	314	449	668
339680*	24	18	7/.0152	0.015	0.38	0.070	1.78	0.915	23.24	253	377	564	839
791720*	36	18	7/.0152	0.015	0.38	0.070	1.78	1.030	26.16	453	674	787	1171
339690*	50	18	7/.0152	0.015	0.38	0.070	1.78	1.180	29.97	524	780	1059	1576
OVERALL SHIELDED PAIRS/TRIADS 16 AWG CONDUCTORS													
325770	1	16	7/.0192	0.015	0.38	0.040	1.02	0.273	6.93	18	27	45	67
325780	1 TRI	16	7/.0192	0.015	0.38	0.042	1.07	0.297	7.54	27	40	58	86
325790	2	16	7/.0192	0.015	0.38	0.042	1.07	0.344	8.74	37	55	74	109
325810	4	16	7/.0192	0.015	0.38	0.053	1.35	0.481	12.22	71	106	132	197
339700*	8	16	7/.0192	0.015	0.38	0.060	1.52	0.726	18.44	135	201	259	385
298830*	12	16	7/.0192	0.015	0.38	0.060	1.52	0.755	19.18	203	302	408	607
760530*	16	16	7/.0192	0.015	0.38	0.070	1.78	0.845	21.46	270	402	526	783
339710*	20	16	7/.0192	0.015	0.38	0.070	1.78	0.905	22.99	334	497	655	975
339720*	24	16	7/.0192	0.015	0.38	0.070	1.78	1.030	26.16	400	595	803	1195
339730*	36	16	7/.0192	0.015	0.38	0.070	1.78	1.165	29.59	599	891	1122	1670
339740*	50	16	7/.0192	0.015	0.38	0.080	2.03	1.355	34.42	831	1237	1544	2298

Dimensions and weights are nominal; subject to industry tolerances.
* Non-stock item; minimum runs apply. Please consult Customer Service for price and delivery.

Product Construction:

Conductor:
- 20 AWG thru 16 AWG bare, annealed copper per ASTM B3
- Class B stranding per ASTM B8

Insulation:
- Lead-free Polyvinyl Chloride (PVC)
- Color-coded per ICEA Method 1: Pairs - black and white; Triads - black, white and red. One conductor in each pair or triad is printed alpha-numerically for easy identification

Shield:
Overall shielded pairs/triads
- Overall shield is Flexfoil® aluminum/polyester in contact with stranded tinned copper drain wire

Jacket:
- Lead-free, sunlight-resistant Polyvinyl Chloride (PVC)

Print:
- GENERAL CABLE® (PLANT OF MFG) PVIC® XX/ PS/TS XXAWG PVC/PVC SHIELDED (UL) TYPE PLTC OR ITC 105°C SUN RES MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

Options:
- Tinned copper conductor
- Class C stranding
- Other constructions available upon request

Applications:
- In free air and raceways in accordance with NEC
- Typical applications include audio, intercom, control, energy management and alarm circuits
- In ducts, cable trays or conduit
- In accordance with UL Subject 13 as Power-Limited Circuit Cable
- In Class 3 circuits in accordance with NEC Article 725
- In accordance with UL Subject 2250 as Instrumentation Tray Cable (ITC)
- Permitted for use in Class I, Division 2 industrial hazardous locations per NEC Article 501-4(b) for UL Type PLTC/ITC cables
- Per NEC Article 727 for Type PLTC/ITC

Features:
- Rated at 105°C
- Good electrical properties
- Oil- and sunlight-resistant
- Flame-retardant
- Good mechanical properties
- Meets cold bend test at -25°C

Compliances:
Industry Compliances:
- UL Type PLTC/ITC, UL File # E36118
- RoHS Compliant

Flame Test Compliances:
- IEEE 383 (70,000 BTU/hr)
- UL Subject 13 (70,000 BTU/hr) for PLTC
- UL Subject 2250 (70,000 BTU/hr) for ITC

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP method
- OSHA Acceptable

Packaging:
- Material cut to length and shipped on non-returnable wood reels

UL LISTED

RoHS Compliant Directive 2002/95/EC

General Cable
Phone: 888-593-3355
www.generalcable.com